FLOOR BOX
CODE: FB148

- Compact and stylish solid stainless floor box providing power and data to open plan areas.

- Two cord outlet ports fold into box to allow cables to exit when in use.

STAINLESS STEEL SURFACE LID

SOLID LID/DEEP BOX

BEVELLED EDGE:
FITS ON TOP OF FLOORING FINISH

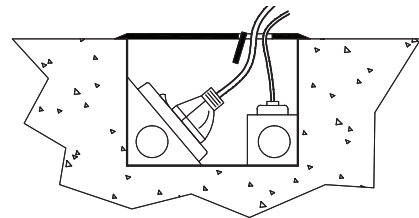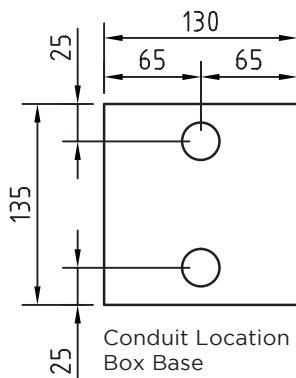**SQUARE EDGED LID AVAILABLE FOR FITTING FLUSH WITH FLOORING FINISH**
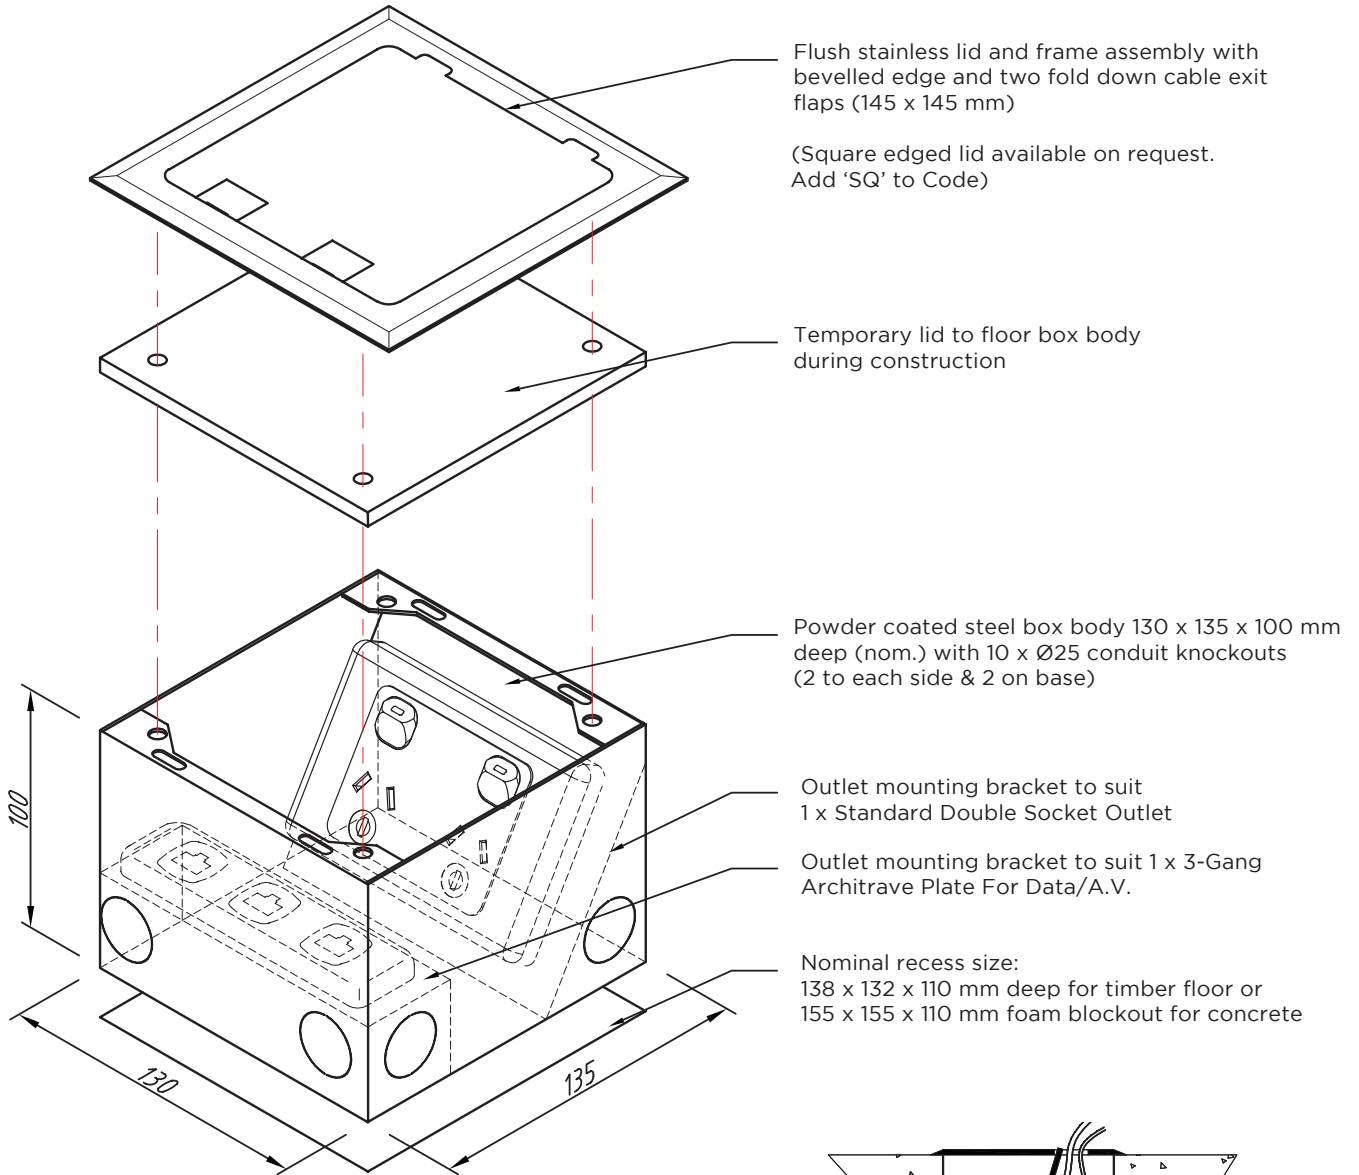ADD 'SQ' TO CODE

LID SIZE:	145 x 145 mm
BOX SIZE:	135 x 130 x 100 mm Deep
SUPPLIED WITH:	1 x Standard Double Socket Outlet
	1 x 3-Gang Architrave Data Plate

FB148 ASSEMBLY

Flush stainless lid and frame assembly with bevelled edge and two fold down cable exit flaps (145 x 145 mm)

(Square edged lid available on request. Add 'SQ' to Code)

Temporary lid to floor box body during construction

Powder coated steel box body 130 x 135 x 100 mm deep (nom.) with 10 x Ø25 conduit knockouts (2 to each side & 2 on base)

Outlet mounting bracket to suit 1 x Standard Double Socket Outlet

Outlet mounting bracket to suit 1 x 3-Gang Architrave Plate For Data/A.V.

Nominal recess size:
138 x 132 x 110 mm deep for timber floor or 155 x 155 x 110 mm foam blockout for concrete

100

130

135

130

25

65   65

135

25

Conduit Location
Box Base

130/135

35   35

6

TEMPORARY LID

100

20

Conduit Location
Hinge & Exit Sides

Assembled side view of FB148 single compartment floor box showing cord outlet flap in use

All dimension quoted are nominal only. Drawings, images and text are for illustrative purposes only and product details and dimensions are subject to change without notice.

This product is not suitable for use in wet areas. It is intended for use with fixed wiring only and must be installed according to the AS/NZ 3000 Wiring Rules.