



GRAZER LED REC^{MK2}

RECESSED PROFILES

DARKON

THE EDGE OF LIGHT

IP22 LED

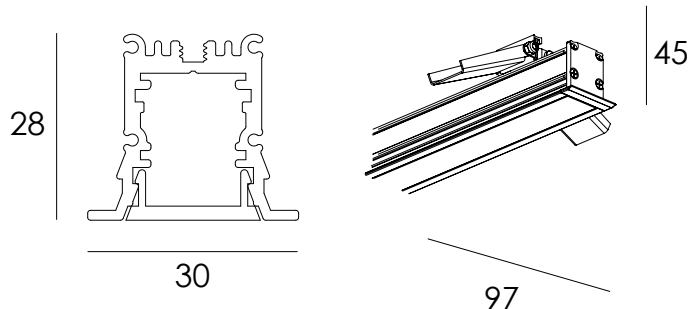

Grazer LED REC is an extra slim recessed profile with downward illumination. It is available in three different LED options to suit your application. Note that the driver must be located remotely.

NOTE: REMOTE DRIVER IS WIDER THAN PROFILE, ALTERNATE ACCESS PANEL REQ.



SPECIFICATIONS

COLOUR

WHITE / BLACK / SILVER / CUSTOM

LAMP

DPAL 20/60 24V FLEXIBLE LED TAPE

TRIDONIC STARK LLE16 HE G4

OUTPUT P/MTR

24V DPAL20: 7.8W p/mtr 313 lm p/mtr

24V DPAL60: 17.7W p/mtr 649 lm p/mtr

200mA LLE16 HE: 14.0W p/mtr 1,235 lm p/mtr

250mA LLE16 HE: 17.2W p/mtr 1,517 lm p/mtr

300mA LLE16 HE: 21.1W p/mtr 1,808 lm p/mtr

350mA LLE16 HE: 23.9W p/mtr 2,041 lm p/mtr

400mA LLE16 HE: 27.7W p/mtr 2,304 lm p/mtr

450mA LLE16 HE: 31.8W p/mtr 2,532 lm p/mtr

500mA LLE16 HE: 35.4W p/mtr 2,747 lm p/mtr

NOTE: SYSTEM WATTAGE / EXIT LUMENS @ 4K

COLOUR TEMP

3000K / 4000K

LENS

OPAL V

DIMMING

DPAL: DALI / SWITCH DIM

HE: DALI / DSI / SWITCH DIM

REQUIRED

REMOTE DRIVER

NOTE: 2M FLEX FROM REMOTE DRIVER TO FITTING

CODE NAME

- NAME: GRAZER LED
- LENGTH:
- LENGTH OUST:
- MOUNTING: REC
- COLOUR: WHT BLK SLV CUST
- COLOUR OUST:
- LENS: OPAL V
- OUTPUT: DPAL20 DPAL60 HE
- CURRENT: 200mA 250mA 300mA 350mA
- CURRENT: 400mA 450mA 500mA
- COLOUR TEMP: 3K 4K
- DIMMING: NON DIM DIM
- LEAD: 550^{mm} LEAD
- FLEX: FLEX & PLUG

EXAMPLE CODE NAME

GRAZER LED / 605 / REC / WHT / OPAL V + HE / 350mA / 3K / DIM / 550MM LEAD / FLEX & PLUG

PROJECT:

LUMINAIRE REF:

QTY:

SPECIFIER DETAILS:

REV: 02/10/17

DARKON.COM.AU