
VENTÜER TECHNICAL DATA SHEET

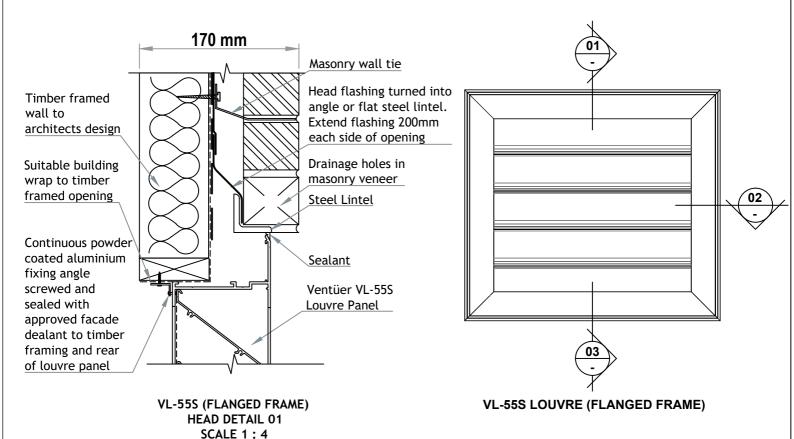

Continuous powder coated aluminium fixing angle screwed and sealed with approved facade dealant to timber framing and rear of Ventüer VL-55S louvre panel Louvre Panel Masonry or tile sill cantilevered or flush Suitable building with min wrap to timber 15°slope framed opening Timber framed wall to architects design, H3.2 timber kick-out fillet Sill Vent Masonry wall tie 170 mm **VL-55S (FLANGED FRAME)**

SILL DETAIL 03

SCALE 1:4

Line of head and 170 mm sill flashing extended 200mm each side of opening Masonry veneer Line of masonry Wall underlay wall tie Suitable building Jamb flashing wrap to timber framed opening Continuous powder coated aluminium fixing angle screwed and sealed with approved facade dealant to timber framing and rear of louvre panel,

VL-55S (FLANGED FRAME)

JAMB DETAIL 02

SCALE 1:4

VENTILATION LOUVRE

VL-77EX

FIXING TO BRICK



Scale: 1:4

Date: 28/03/2019

VL-77EX Ver.1