




TECHNICAL DATA SHEET

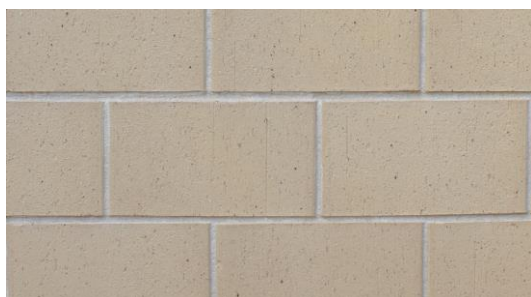

| PRODUCT TECHNICAL INFORMATION | |
|--|--------------------------|
| PRODUCT NAME | Augusta Limestone |
| TYPICAL PROPERTIES | |
| Work Length (mm) | 290 |
| Work Width (mm) | 70 |
| Work Height (mm) | 162 |
| Dimensional Category | DW1 |
| Bricks per SQM | 19.4 |
| Nominal Dry Brick Weight (kg) | 4.7 |
| Bricks per Pack | 144 |
| Nominal Pack Weight (kg) | 677 |
| Pack Size (mm) | 870 x 950 x 1100 |
| Characteristic Unconfirmed Compressive Strength MPa (f'uc) | >12 |
| 24 Hour Cold Water Absorption (%) | <12 |
| Initial Rate of Absorption (kg/m ² /min) | <1.5 |
| 15 Year Coefficient of Expansion (mm/m/15yrs) | <1.0 |
| Core Percentage (%) | <30 |
| Durability Class | General Purpose |
| Liability to Efflorescence | Nil to Slight |
| Lime Pitting Liability | Nil to Slight |

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Colours and core configurations are indicative only. Information subject to change without notice.



TECHNICAL DATA SHEET



| PRODUCT TECHNICAL INFORMATION | |
|--|-----------------------------|
| PRODUCT NAME | Florentine Limestone |
| TYPICAL PROPERTIES | |
| Work Length (mm) | 290 |
| Work Width (mm) | 70 |
| Work Height (mm) | 162 |
| Dimensional Category | DW1 |
| Bricks per SQM | 19.4 |
| Nominal Dry Brick Weight (kg) | 4.9 |
| Bricks per Pack | 144 |
| Nominal Pack Weight (kg) | 706 |
| Pack Size (mm) | 870 x 950 x 1100 |
| Characteristic Unconfirmed Compressive Strength MPa (f'uc) | >15 |
| 24 Hour Cold Water Absorption (%) | <12 |
| Initial Rate of Absorption (kg/m ² /min) | <1.5 |
| 15 Year Coefficient of Expansion (mm/m/15yrs) | <1.0 |
| Core Percentage (%) | <30 |
| Durability Class | General Purpose |
| Liability to Efflorescence | Nil to Slight |
| Lime Pitting Liability | Nil to Slight |

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Colours and core configurations are indicative only. Information subject to change without notice.

TECHNICAL DATA SHEET

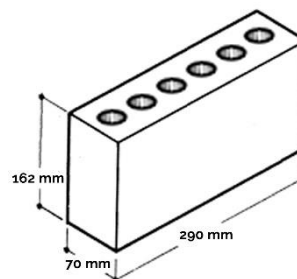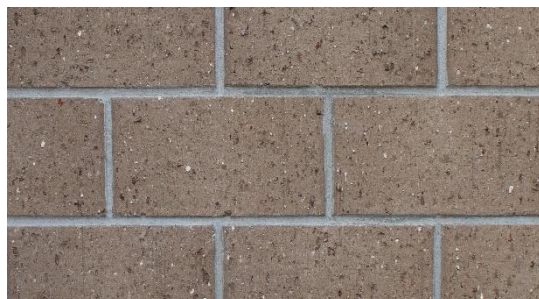

| PRODUCT TECHNICAL INFORMATION | |
|--|--------------------|
| PRODUCT NAME | Silverbirch |
| TYPICAL PROPERTIES | |
| Work Length (mm) | 290 |
| Work Width (mm) | 70 |
| Work Height (mm) | 162 |
| Dimensional Category | DW1 |
| Bricks per SQM | 19.4 |
| Nominal Dry Brick Weight (kg) | 4.4 |
| Bricks per Pack | 168 |
| Nominal Pack Weight (kg) | 739 |
| Pack Size (mm) | 870 x 950 x 1100 |
| Characteristic Unconfirmed Compressive Strength MPa (f'uc) | >15 |
| 24 Hour Cold Water Absorption (%) | <10 |
| Initial Rate of Absorption (kg/m ² /min) | <1.5 |
| 15 Year Coefficient of Expansion (mm/m/15yrs) | <1.0 |
| Core Percentage (%) | <30 |
| Durability Class | General Purpose |
| Liability to Efflorescence | Nil to Slight |
| Lime Pitting Liability | Nil to Slight |

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Colours and core configurations are indicative only. Information subject to change without notice.