



## TECHNICAL DATA SHEET



PRODUCT TECHNICAL INFORMATION	
PRODUCT NAME	<b>Apollo</b>
TYPICAL PROPERTIES	
Work Length (mm)	230
Work Width (mm)	70
Work Height (mm)	122
Dimensional Category	DW1
Bricks per SQM	32
Nominal Dry Brick Weight (kg)	
Bricks per Pack	392
Nominal Pack Weight (kg)	
Pack Size (mm)	900 x 900 x 1100
Characteristic Unconfirmed Compressive Strength MPa (f'uc)	>40
24 Hour Cold Water Absorption (%)	<6
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<0.8
Moisture Movement (mm/m)	<0.5
Perforation Volume	<35%
Durability Class	Exposure Grade
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Colours and core configurations are indicative only. Information subject to change without notice.


## TECHNICAL DATA SHEET

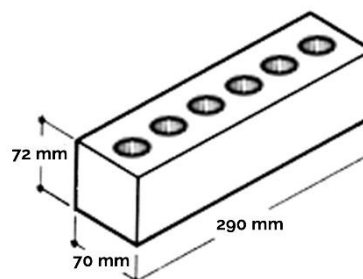

PRODUCT TECHNICAL INFORMATION	
PRODUCT NAME	<b>Arena</b>
TYPICAL PROPERTIES	
Work Length (mm)	290
Work Width (mm)	70
Work Height (mm)	72
Dimensional Category	DW1
Bricks per SQM	41
Nominal Dry Brick Weight (kg)	
Bricks per Pack	504
Nominal Pack Weight (kg)	
Pack Size (mm)	900 x 900 x 1100
Characteristic Unconfirmed Compressive Strength MPa (f'uc)	>40
24 Hour Cold Water Absorption (%)	<6
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<0.6
Moisture Movement (mm/m)	<0.4
Perforation Volume	<36%
Durability Class	Exposure Grade
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Colours and core configurations are indicative only. Information subject to change without notice.


## TECHNICAL DATA SHEET



PRODUCT TECHNICAL INFORMATION	
PRODUCT NAME	<b>Atlas</b>
TYPICAL PROPERTIES	
Work Length (mm)	290
Work Width (mm)	70
Work Height (mm)	156
Dimensional Category	DW1
Bricks per SQM	20
Nominal Dry Brick Weight (kg)	
Bricks per Pack	210
Nominal Pack Weight (kg)	
Pack Size (mm)	900 x 900 x 1100
Characteristic Unconfirmed Compressive Strength MPa (f'uc)	>40
24 Hour Cold Water Absorption (%)	<6
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<0.6
Moisture Movement (mm/m)	<0.4
Perforation Volume	<36%
Durability Class	Exposure Grade
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Colours and core configurations are indicative only. Information subject to change without notice.



## TECHNICAL DATA SHEET

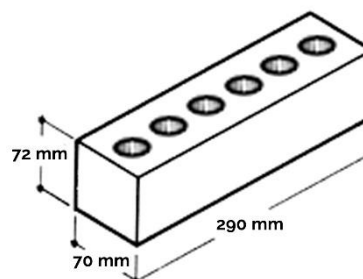

PRODUCT TECHNICAL INFORMATION	
PRODUCT NAME	<b>Aura</b>
TYPICAL PROPERTIES	
Work Length (mm)	290
Work Width (mm)	70
Work Height (mm)	72
Dimensional Category	DW1
Bricks per SQM	41
Nominal Dry Brick Weight (kg)	
Bricks per Pack	504
Nominal Pack Weight (kg)	
Pack Size (mm)	900 x 900 x 1100
Characteristic Unconfirmed Compressive Strength MPa (f'uc)	>40
24 Hour Cold Water Absorption (%)	<6
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<0.6
Moisture Movement (mm/m)	<0.4
Perforation Volume	<36%
Durability Class	Exposure Grade
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Colours and core configurations are indicative only. Information subject to change without notice.


## TECHNICAL DATA SHEET

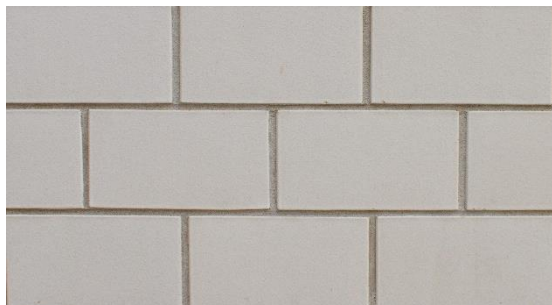

PRODUCT TECHNICAL INFORMATION	
PRODUCT NAME	<b>Blanco</b>
TYPICAL PROPERTIES	
Work Length (mm)	230
Work Width (mm)	70
Work Height (mm)	122
Dimensional Category	DW1
Bricks per SQM	32
Nominal Dry Brick Weight (kg)	
Bricks per Pack	392
Nominal Pack Weight (kg)	
Pack Size (mm)	900 x 900 x 1100
Characteristic Unconfirmed Compressive Strength MPa (f'uc)	>40
24 Hour Cold Water Absorption (%)	<6
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<0.6
Moisture Movement (mm/m)	<0.4
Perforation Volume	<35%
Durability Class	Exposure Grade
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Colours and core configurations are indicative only. Information subject to change without notice.


## TECHNICAL DATA SHEET



PRODUCT TECHNICAL INFORMATION	
PRODUCT NAME	<b>Ceniza</b>
TYPICAL PROPERTIES	
Work Length (mm)	230
Work Width (mm)	70
Work Height (mm)	72
Dimensional Category	DW1
Bricks per SQM	51
Nominal Dry Brick Weight (kg)	
Bricks per Pack	672
Nominal Pack Weight (kg)	
Pack Size (mm)	900 x 900 x 1100
Characteristic Unconfirmed Compressive Strength MPa (f'uc)	>40
24 Hour Cold Water Absorption (%)	<6
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<0.4
Moisture Movement (mm/m)	<0.5
Perforation Volume	<35%
Durability Class	Exposure Grade
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Colours and core configurations are indicative only. Information subject to change without notice.


## TECHNICAL DATA SHEET

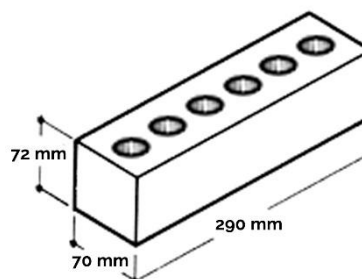

PRODUCT TECHNICAL INFORMATION	
PRODUCT NAME	<b>Ceres</b>
TYPICAL PROPERTIES	
Work Length (mm)	290
Work Width (mm)	70
Work Height (mm)	72
Dimensional Category	DW1
Bricks per SQM	41
Nominal Dry Brick Weight (kg)	
Bricks per Pack	504
Nominal Pack Weight (kg)	
Pack Size (mm)	900 x 900 x 1100
Characteristic Unconfirmed Compressive Strength MPa (f'uc)	>40
24 Hour Cold Water Absorption (%)	<6
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<0.6
Moisture Movement (mm/m)	<0.4
Perforation Volume	<36%
Durability Class	Exposure Grade
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Colours and core configurations are indicative only. Information subject to change without notice.

## TECHNICAL DATA SHEET




PRODUCT TECHNICAL INFORMATION	
PRODUCT NAME	<b>Cero</b>
TYPICAL PROPERTIES	
Work Length (mm)	230
Work Width (mm)	70
Work Height (mm)	72
Dimensional Category	DW1
Bricks per SQM	51
Nominal Dry Brick Weight (kg)	
Bricks per Pack	672
Nominal Pack Weight (kg)	
Pack Size (mm)	900 x 900 x 1100
Characteristic Unconfirmed Compressive Strength MPa (f'uc)	>40
24 Hour Cold Water Absorption (%)	<6
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<0.6
Moisture Movement (mm/m)	<0.4
Perforation Volume	<35%
Durability Class	Exposure Grade
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Colours and core configurations are indicative only. Information subject to change without notice.




## TECHNICAL DATA SHEET

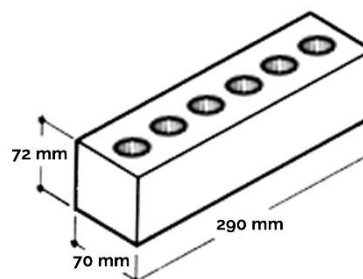

PRODUCT TECHNICAL INFORMATION	
PRODUCT NAME	<b>Cromo</b>
TYPICAL PROPERTIES	
Work Length (mm)	290
Work Width (mm)	70
Work Height (mm)	72
Dimensional Category	DW1
Bricks per SQM	41
Nominal Dry Brick Weight (kg)	
Bricks per Pack	504
Nominal Pack Weight (kg)	
Pack Size (mm)	900 x 900 x 1100
Characteristic Unconfirmed Compressive Strength MPa (f'uc)	>40
24 Hour Cold Water Absorption (%)	<6
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<0.6
Moisture Movement (mm/m)	<0.4
Perforation Volume	<36%
Durability Class	Exposure Grade
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Colours and core configurations are indicative only. Information subject to change without notice.


## TECHNICAL DATA SHEET



PRODUCT TECHNICAL INFORMATION	
PRODUCT NAME	<b>Gris</b>
TYPICAL PROPERTIES	
Work Length (mm)	230
Work Width (mm)	70
Work Height (mm)	122
Dimensional Category	DW1
Bricks per SQM	32
Nominal Dry Brick Weight (kg)	
Bricks per Pack	392
Nominal Pack Weight (kg)	
Pack Size (mm)	900 x 900 x 1100
Characteristic Unconfirmed Compressive Strength MPa (f'uc)	>40
24 Hour Cold Water Absorption (%)	<6
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<0.8
Moisture Movement (mm/m)	<0.5
Perforation Volume	<35%
Durability Class	Exposure Grade
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Colours and core configurations are indicative only. Information subject to change without notice.



## TECHNICAL DATA SHEET



PRODUCT TECHNICAL INFORMATION	
PRODUCT NAME	<b>Metallic Black</b>
TYPICAL PROPERTIES	
Work Length (mm)	230
Work Width (mm)	70
Work Height (mm)	72
Dimensional Category	DW1
Bricks per SQM	51
Nominal Dry Brick Weight (kg)	
Bricks per Pack	672
Nominal Pack Weight (kg)	
Pack Size (mm)	900 x 900 x 1100
Characteristic Unconfirmed Compressive Strength MPa (f'uc)	>40
24 Hour Cold Water Absorption (%)	<6
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<0.8
Moisture Movement (mm/m)	<0.5
Perforation Volume	<35%
Durability Class	Exposure Grade
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Colours and core configurations are indicative only. Information subject to change without notice.



## TECHNICAL DATA SHEET

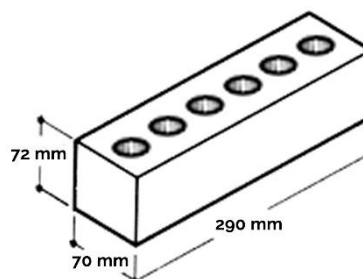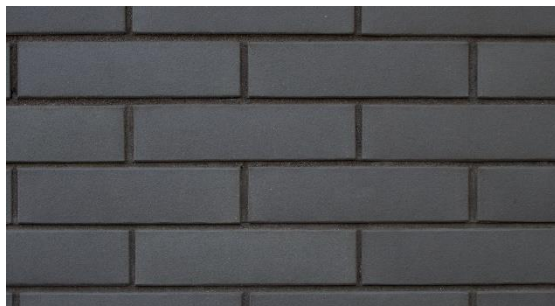

PRODUCT TECHNICAL INFORMATION	
PRODUCT NAME	<b>Mora</b>
TYPICAL PROPERTIES	
Work Length (mm)	290
Work Width (mm)	70
Work Height (mm)	72
Dimensional Category	DW1
Bricks per SQM	41
Nominal Dry Brick Weight (kg)	
Bricks per Pack	504
Nominal Pack Weight (kg)	
Pack Size (mm)	900 x 900 x 1100
Characteristic Unconfirmed Compressive Strength MPa (f'uc)	>40
24 Hour Cold Water Absorption (%)	<6
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<0.8
Moisture Movement (mm/m)	<0.5
Perforation Volume	<36%
Durability Class	Exposure Grade
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Colours and core configurations are indicative only. Information subject to change without notice.



## TECHNICAL DATA SHEET

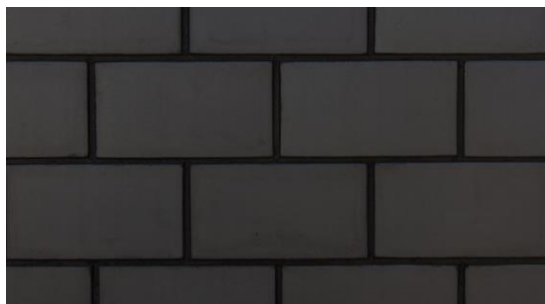

PRODUCT TECHNICAL INFORMATION	
PRODUCT NAME	<b>Nero</b>
TYPICAL PROPERTIES	
Work Length (mm)	230
Work Width (mm)	70
Work Height (mm)	122
Dimensional Category	DW1
Bricks per SQM	32
Nominal Dry Brick Weight (kg)	
Bricks per Pack	392
Nominal Pack Weight (kg)	
Pack Size (mm)	900 x 900 x 1100
Characteristic Unconfirmed Compressive Strength MPa (f'uc)	>40
24 Hour Cold Water Absorption (%)	<6
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<0.8
Moisture Movement (mm/m)	<0.5
Perforation Volume	<35%
Durability Class	Exposure Grade
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Colours and core configurations are indicative only. Information subject to change without notice.



## TECHNICAL DATA SHEET

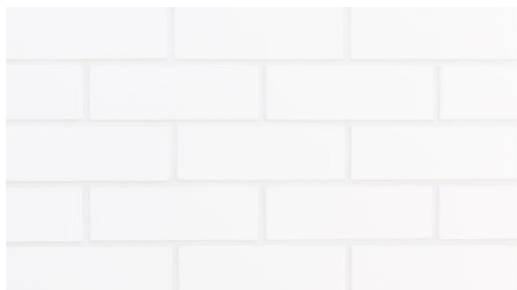

PRODUCT TECHNICAL INFORMATION	
PRODUCT NAME	<b>Nieve</b>
TYPICAL PROPERTIES	
Work Length (mm)	230
Work Width (mm)	70
Work Height (mm)	72
Dimensional Category	DW1
Bricks per SQM	51
Nominal Dry Brick Weight (kg)	
Bricks per Pack	672
Nominal Pack Weight (kg)	
Pack Size (mm)	900 x 900 x 1100
Characteristic Unconfirmed Compressive Strength MPa (f'uc)	>40
24 Hour Cold Water Absorption (%)	<6
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<0.6
Moisture Movement (mm/m)	<0.4
Perforation Volume	<35%
Durability Class	Exposure Grade
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Colours and core configurations are indicative only. Information subject to change without notice.


## TECHNICAL DATA SHEET

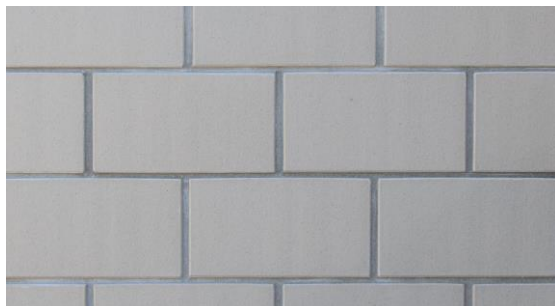

PRODUCT TECHNICAL INFORMATION	
PRODUCT NAME	<b>Plata</b>
TYPICAL PROPERTIES	
Work Length (mm)	230
Work Width (mm)	70
Work Height (mm)	122
Dimensional Category	DW1
Bricks per SQM	32
Nominal Dry Brick Weight (kg)	
Bricks per Pack	392
Nominal Pack Weight (kg)	
Pack Size (mm)	900 x 900 x 1100
Characteristic Unconfirmed Compressive Strength MPa (f'uc)	>40
24 Hour Cold Water Absorption (%)	<6
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<0.4
Moisture Movement (mm/m)	<0.5
Perforation Volume	<35%
Durability Class	Exposure Grade
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Colours and core configurations are indicative only. Information subject to change without notice.

## TECHNICAL DATA SHEET

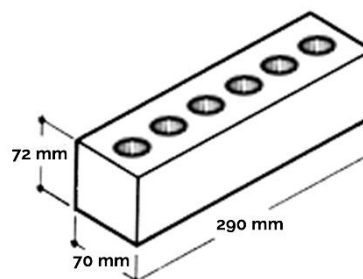


PRODUCT TECHNICAL INFORMATION	
PRODUCT NAME	<b>Puro</b>
TYPICAL PROPERTIES	
Work Length (mm)	290
Work Width (mm)	70
Work Height (mm)	72
Dimensional Category	DW1
Bricks per SQM	41
Nominal Dry Brick Weight (kg)	
Bricks per Pack	504
Nominal Pack Weight (kg)	
Pack Size (mm)	900 x 900 x 1100
Characteristic Unconfirmed Compressive Strength MPa (f'uc)	>40
24 Hour Cold Water Absorption (%)	<6
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<0.6
Moisture Movement (mm/m)	<0.4
Perforation Volume	<36%
Durability Class	Exposure Grade
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Colours and core configurations are indicative only. Information subject to change without notice.





## TECHNICAL DATA SHEET



PRODUCT TECHNICAL INFORMATION	
PRODUCT NAME	<b>Rosso</b>
TYPICAL PROPERTIES	
Work Length (mm)	230
Work Width (mm)	70
Work Height (mm)	72
Dimensional Category	DW1
Bricks per SQM	51
Nominal Dry Brick Weight (kg)	
Bricks per Pack	672
Nominal Pack Weight (kg)	
Pack Size (mm)	900 x 900 x 1100
Characteristic Unconfirmed Compressive Strength MPa (f'uc)	>30
24 Hour Cold Water Absorption (%)	<6
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<0.6
Moisture Movement (mm/m)	<0.4
Perforation Volume	<36%
Durability Class	Exposure Grade
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Colours and core configurations are indicative only. Information subject to change without notice.


## TECHNICAL DATA SHEET

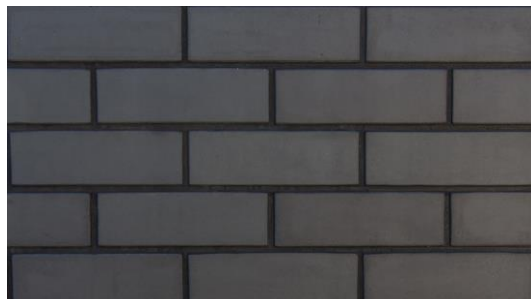

PRODUCT TECHNICAL INFORMATION	
PRODUCT NAME	<b>Toro</b>
TYPICAL PROPERTIES	
Work Length (mm)	230
Work Width (mm)	70
Work Height (mm)	72
Dimensional Category	DW1
Bricks per SQM	51
Nominal Dry Brick Weight (kg)	2.35
Bricks per Pack	672
Nominal Pack Weight (kg)	1580
Pack Size (mm)	900 x 900 x 1100
Characteristic Unconfirmed Compressive Strength MPa (f'uc)	>40
24 Hour Cold Water Absorption (%)	<6
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<0.8
Moisture Movement (mm/m)	<0.5
Perforation Volume	<35%
Durability Class	Exposure Grade
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Colours and core configurations are indicative only. Information subject to change without notice.

## TECHNICAL DATA SHEET



PRODUCT TECHNICAL INFORMATION	
PRODUCT NAME	<b>White Glaze</b>
TYPICAL PROPERTIES	
Work Length (mm)	230
Work Width (mm)	70
Work Height (mm)	72
Dimensional Category	DW1
Bricks per SQM	51
Nominal Dry Brick Weight (kg)	
Bricks per Pack	672
Nominal Pack Weight (kg)	
Pack Size (mm)	900 x 900 x 1100
Characteristic Unconfirmed Compressive Strength MPa (f'uc)	>40
24 Hour Cold Water Absorption (%)	<6
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<0.6
Moisture Movement (mm/m)	<0.4
Perforation Volume	<35%
Durability Class	Exposure Grade
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Colours and core configurations are indicative only. Information subject to change without notice.