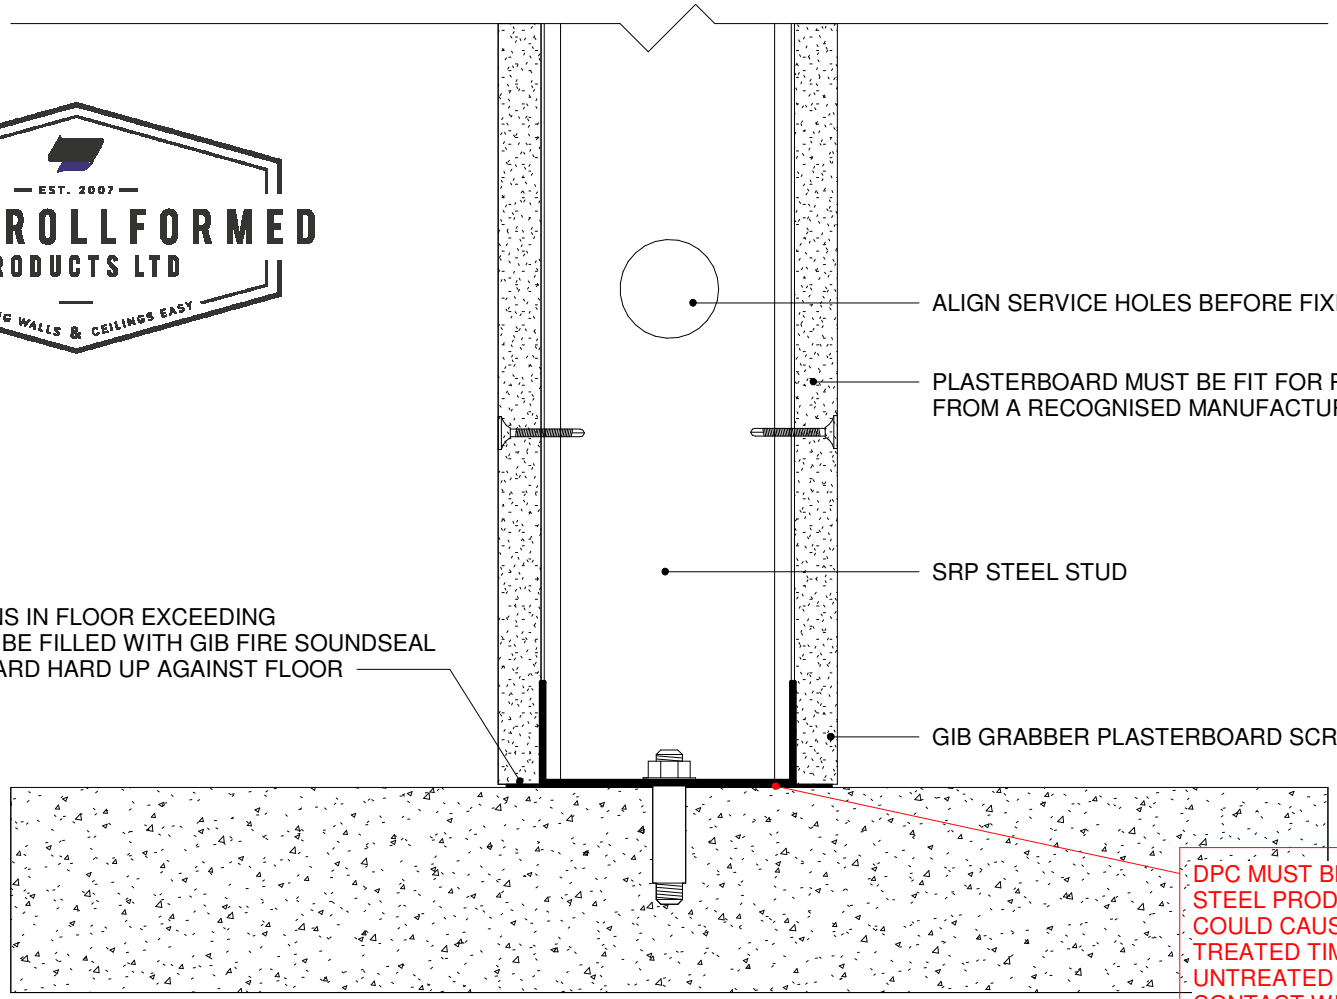
ALIGN SERVICE HOLES BEFORE FIXING PLASTERBOARD
PLASTERBOARD MUST BE FIT FOR PURPOSE AND FROM A RECOGNISED MANUFACTURER
SRP STEEL STUD
UNDULATIONS IN FLOOR EXCEEDING 0.5MM MUST BE FILLED WITH GIB FIRE SOUNDSEAL PLASTERBOARD HARD UP AGAINST FLOOR
GIB GRABBER PLASTERBOARD SCREW
DPC MUST BE INSTALLED BETWEEN SRP STEEL PRODUCTS AND ANY SUBSTRATE THAT COULD CAUSE A REACTION. CONCRETE AND TREATED TIMBER ARE THE MOST COMMON. UNTREATED TIMBER IS SAFE IN DIRECT CONTACT WITH SRP STEEL