
RESIDENTIAL SLIMCLAD REVERSE RUN WALL CLADDING HEAD BARGE FOR VERTICAL CLADDING ON CAVITY ON CAVITY (KICK OUT)

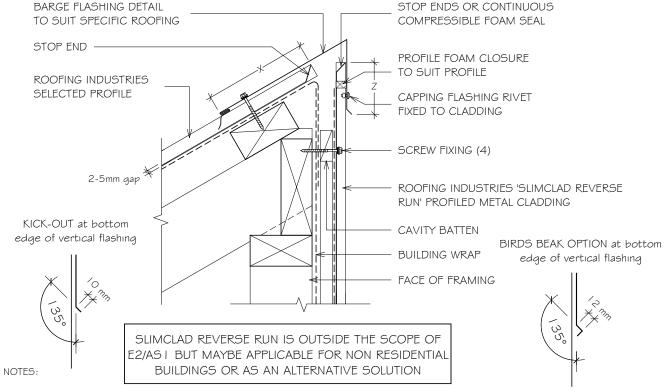

- These details are to be read with Roofing Industries profile technical summary regarding wind loads and fixings.
- These details are generally in compliance E2/AS I and/or the NZ Metal Roof \$ Wall Cladding Code of Practice and in some cases specific details by 'Roofing Industries'.
- The building designer is ultimately responsible to ensure that details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure including cavity batters are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity batters may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof \$ Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1.
- Details are for steel based materials, other substrates may require some changes.
- All dimensions are nominal.

Detail Number: RI-RSCW002A-I

Date drawn: 25/11/2021

Scale: 1:5@ A4

SITE WIND ZONE	MINIMUM	
(As per NZS3604)	Z ⁽²⁾	Х
SITUATION I (6)	75mm	I 30mm
SITUATION 2 \$ 3 (6)	I OOmm	200mm

DETAIL ANNOTATION:

- 1. SITUATION 1, 2 \$ 3 AS PER E2/AS 1 TABLE 7
- 2. EXCLUDING DRIP EDGE.
- 3. INCREASE DISTANCE 'Z' BY 25mm WHEN AGAINST A PROFILED SURFACE OR TO 100mm WHICHEVER IS THE LESSER.
- 4. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
- 5. CAVITY BATTENS OR PACKERS CONTAINING
 CORROSIVE MATERIAL MUST BE SEPARATED
 FROM METAL CLADDING BY DPC, BUILDING WRAP,
 PVC OR PAINTING.
- ALTERNATIVELY REFER TO E2/AS I FOR FLASHING GUIDANCE.

Copyright detail © 2021

