




AQUAPURA MONOBLOC

DOMESTIC
HOT WATER

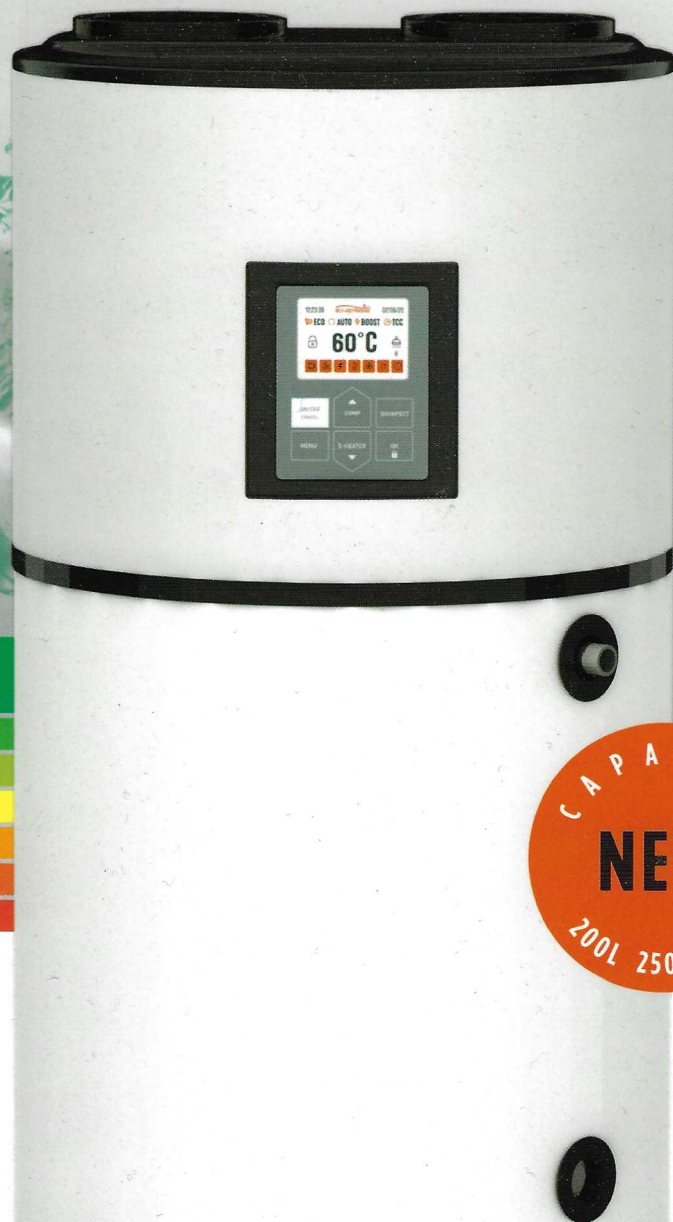

HIGH EFFICIENCY AEROTHERMAL
HEAT PUMP FOR THE PRODUCTION
OF DOMESTIC HOT WATER
IN YOUR HOME!

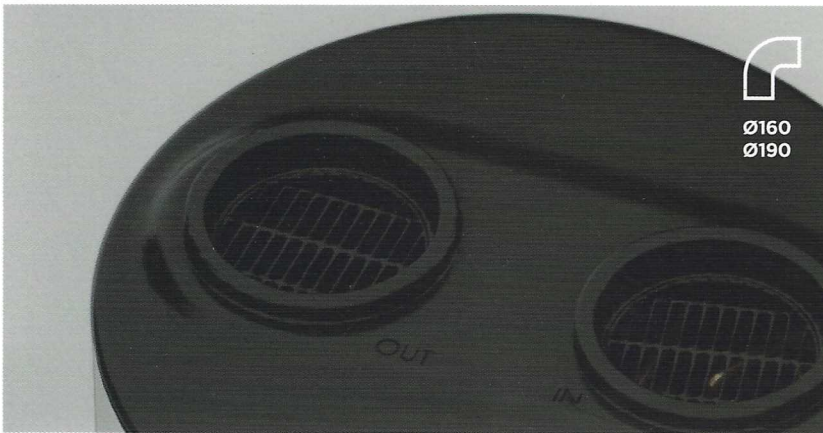

Ø160
Ø190

+ ROBUST


The new AQUAPURA MONOBLOC heat pumps are presented with a modern design, high impact polymer exterior finish, combined with components that provide a longer life, thermal and acoustic insulation, and are prepared for laying Ø160 and Ø190 pipes.



36 dB(A)

+ SILENT

Equipped with a centrifugal fan for maximum efficiency, coupled to a ventilation box developed for minimum noise, with a sound pressure of 36dB(A) 2m.

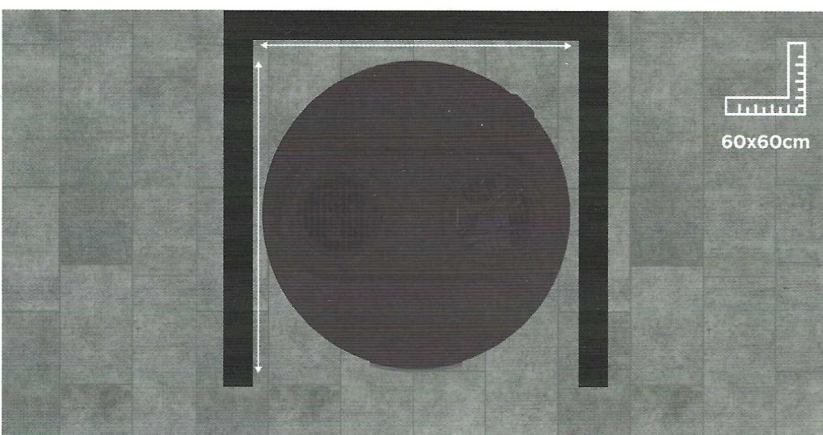

60x60cm

+ ERGONOMIC

Compact equipment, with stainless steel tank and hydraulic connections for easy access, ensuring greater installation flexibility. The 200 and 250 litre models can be integrated in a 60x60cm cabinet.



+ EFFICIENT

The pumps have a high level of efficiency, ensuring the whole range achieve A+ energy class, with one of the highest performance coefficients on the market (COP = 3.84 for the 300 litre model according to EN16147, air at 14°C and water heating from 10°C to 54°C).

HIGH LEVEL OF EFFICIENCY

PRODUCTION OF DOMESTIC HOT WATER



1. Compressor. 2. Fan. 3. Electrical resistance. 4. Disinfect. 5. Defrost. 6. Solar function. 7. Alarm.



DIFFERENT TYPES OF INSTALLATION



CAPACITY
200, 250, 300L



TECHNICAL DATA		200i	200ix	250i	250ix	300i	300ix	
Power Supply	V-/Hz	220-240/50						
Thermal Power	W	1800						
Electrical Power	W	400-700						
Electrical Element	W	1500						
COP* (EN16147)	COP	3.51		3.61		3.84		
Energetic Efficiency*	%	139		149		160		
Heating Time* (EN16147)	h:mm	05:05		05:36		05:42		
Water removed at 40°C in one extraction (EN16147)	l	251	245	323	317	362	355	
Sound Level @ 2m	dB(A)	36						
Refrigerant Fluid	-/Kg	R134a /1,2						
ErP Class	Tapping Profile				A+			
		L					XL	

DIMENSIONS/WEIGHT/DUCTS		200i	200ix	250i	250ix	300i	300ix
Dimensions (ø/Height)	mm	580/1695		580/1970		650/1860	
Weight	Kg	75	83	83	95	93	98
Ducts Diameter	mm	160/190					

HOT WATER CYLINDER		200i	200ix	250i	250ix	300i	300ix
Nominal Capacity	l	200	195	250	245	300	295
Maximum Operating Pressure	bar	7					
Material		Stainless Steel**					
Insulation		High Density Polyurethane					
Corrosion Protection		Magnesium Anode					
Auxiliary Coil(Comp./ø)	m/mm	10/25					
Hydraulic connections, inlet/outlet		3/4"					
Auxiliary Coil Connections		-	1"	-	1"	-	1"



WORKING CONDITIONS		200i	200ix	250i	250ix	300i	300ix
Outside Air Temperature Min/Max	°C	-5 / 40					
Maximum Water Temperature (Heat Pump / Boost Mode)	°C	60 / 70					

EN16147: Water heating from 10°C to 54°C | *Air temperature 14°C | **High Corrosion Resistance


DIMENSIONS	mm	200i	200ix	250i	250ix	300i	300ix
A		1695		1970		1860	
B		580		580		650	
C		99		99		107	
D		-	215	-	215	-	236
E		-	706	-	706	-	636
F		820		840		787	
G		1044		1343		1187	
H		1180		1475		1330	
I		286		286		286	
J Ø		160/190		160/190		160/190	

Equipment: **200i/200ix/250i/250ix**

Equipment: **300i/300ix**

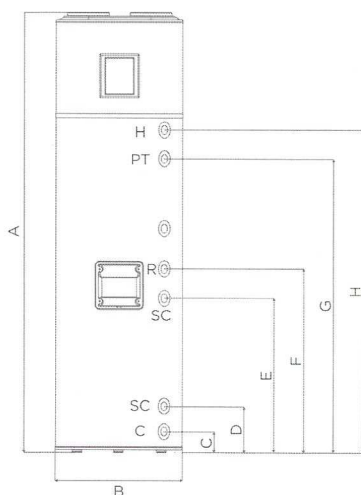

H. Hot water
C. Cold water
PT. Pressure and temperature valve
R. Recirculation
SC. Solar coil

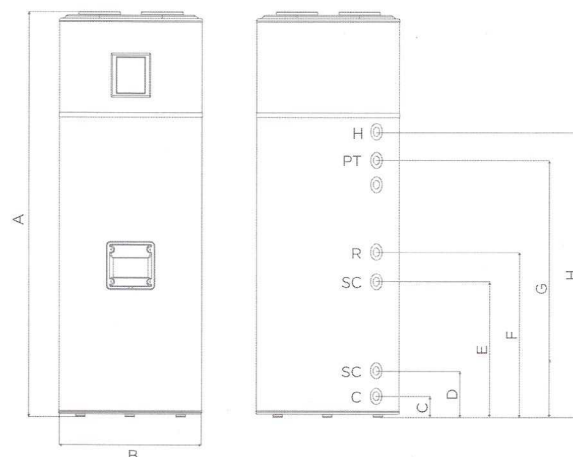

AQUAPURA MONOBLOC


A COMPACT DEVICE
FOR HOT WATER

 DESIGN, DEVELOPMENT AND
EUROPEAN MANUFACTURING





RENEWABLE
ENERGY HOT
WATER FOR
DOMESTIC
PURPOSES
AT 60°C


- Stainless steel storage water heater
- Minimum space required at home
- High level of efficiency and ecology
- Quiet operation
- Chrono function with time scheduling
- Easy installation
- Intelligent photovoltaic function
- Anti-legionella function
- Controller with software in 6 languages
- Dehumidifies small spaces
- Optional solar coil

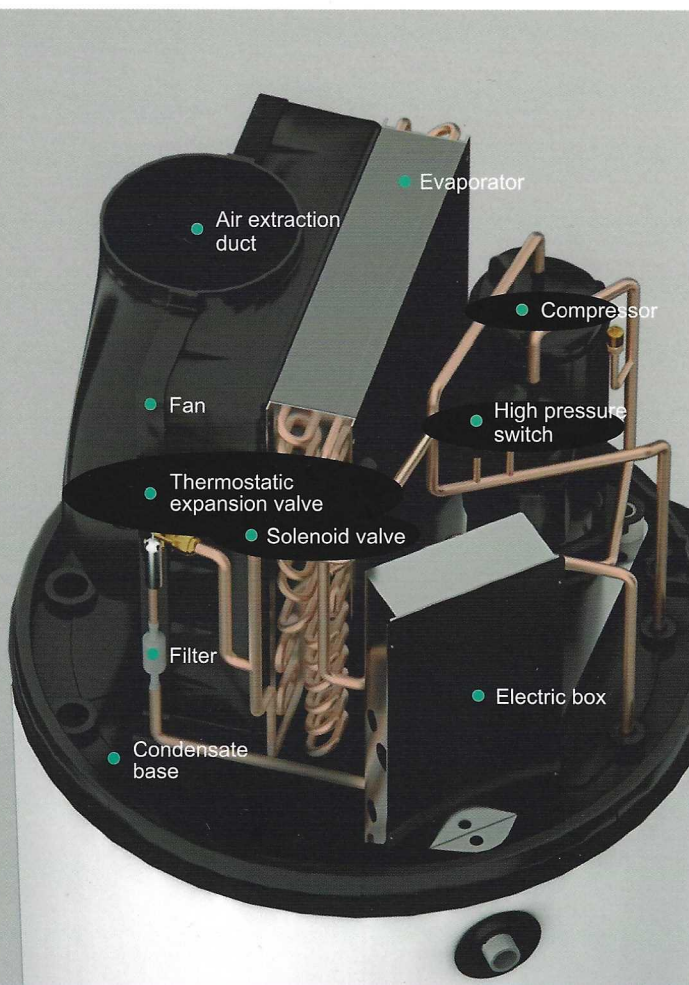

This catalogue was created for information purposes only and does not constitute a contractual offer from ENERGIE Est Lda. ENERGIE Est Lda has compiled the content of this catalogue to the best of their knowledge. There is no guarantee expressed or implied regarding the completeness, accuracy, reliability for a particular purpose of its content and the products and services presented therein. Specifications are subject to change without notice. The ENERGIE Est Lda explicitly rejects any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this catalogue. ROVO/2020

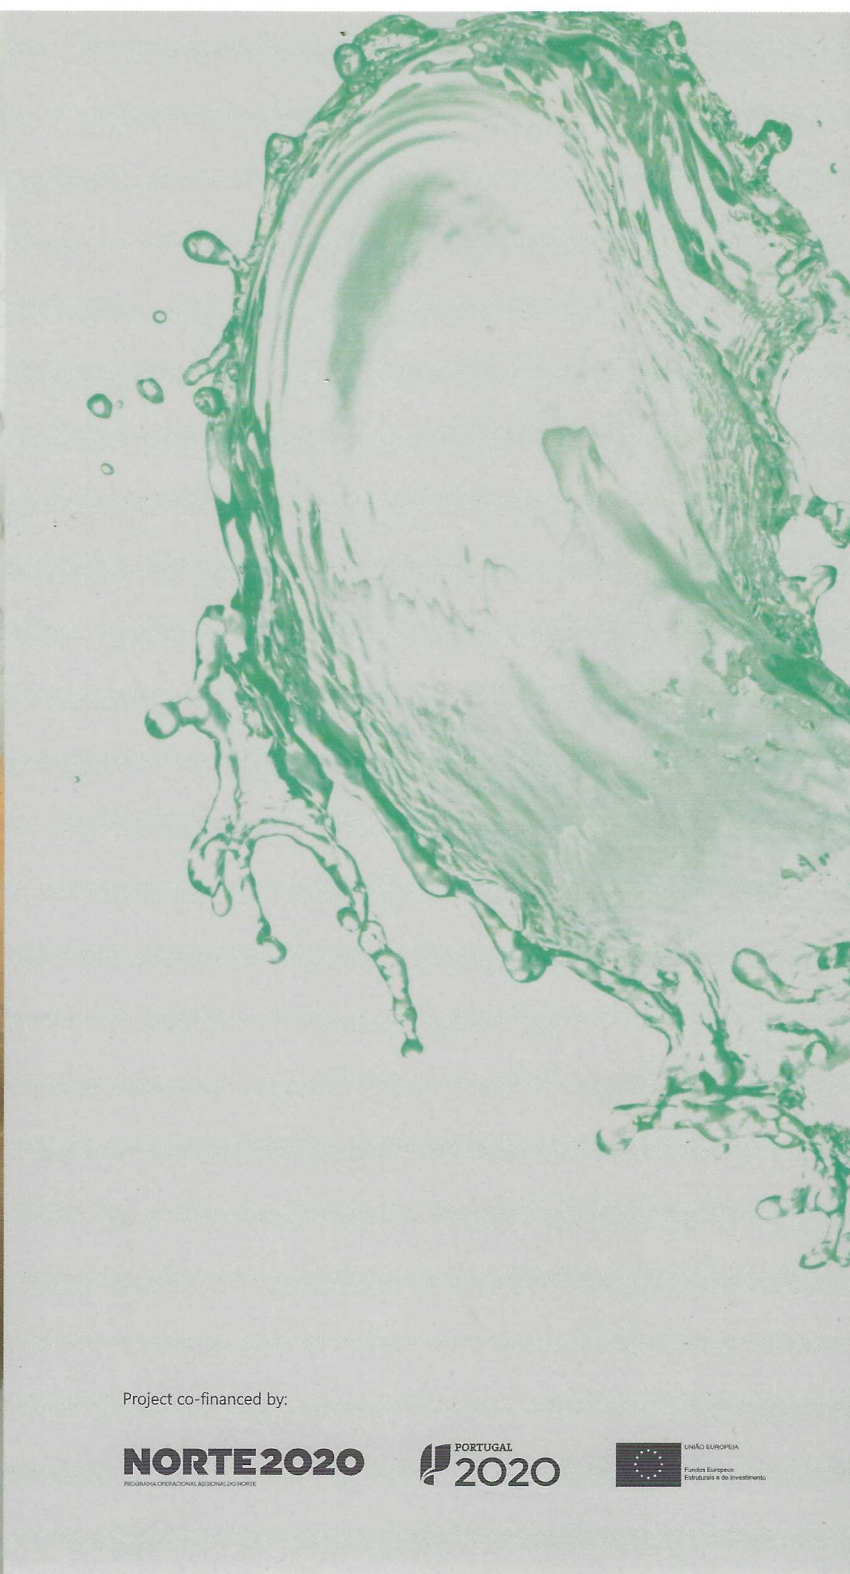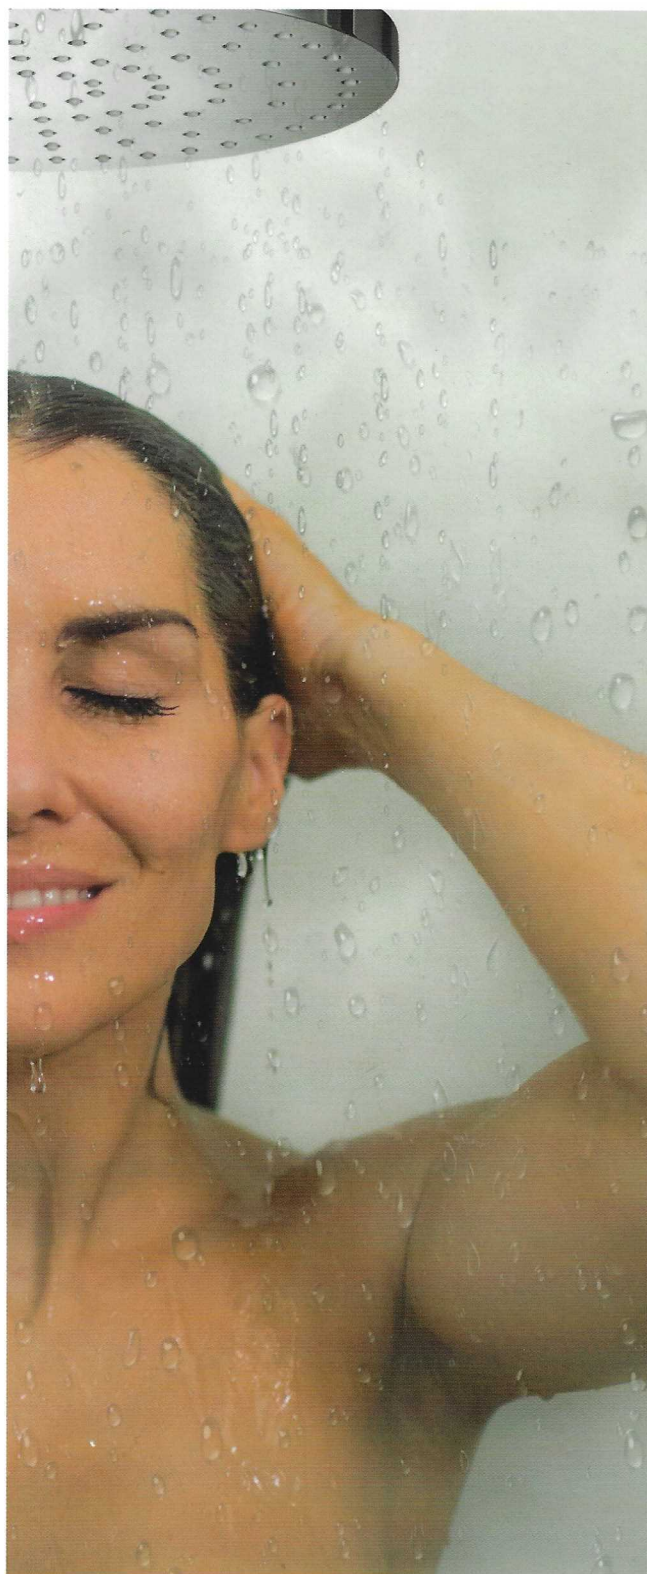

Project co-financed by:



Zona Industrial de Laúndos
Lote 48, 4570-311 Laúndos
Póvoa de Varzim, Portugal
EMAIL energie@energie.pt
SITE www.energie.pt

Follow us at:
ENERGIE PORTUGAL
Social media icons for Instagram, Facebook, LinkedIn, and YouTube.



03 540 3003
www.taec.co.nz
info@taec.co.nz