

Prolam[®] Crib Walls

Retaining wall system for DIY or commercial jobs.

- Easy to install
- Refreshing modern look
- Installation manual available





Customer:


Location:

Description of Building:

Swimming Pool Other Retaining Walls, Roads,
Driveways within 5 metres of Wall

Distance: _____ mm

Ground Slope Behind Wall:

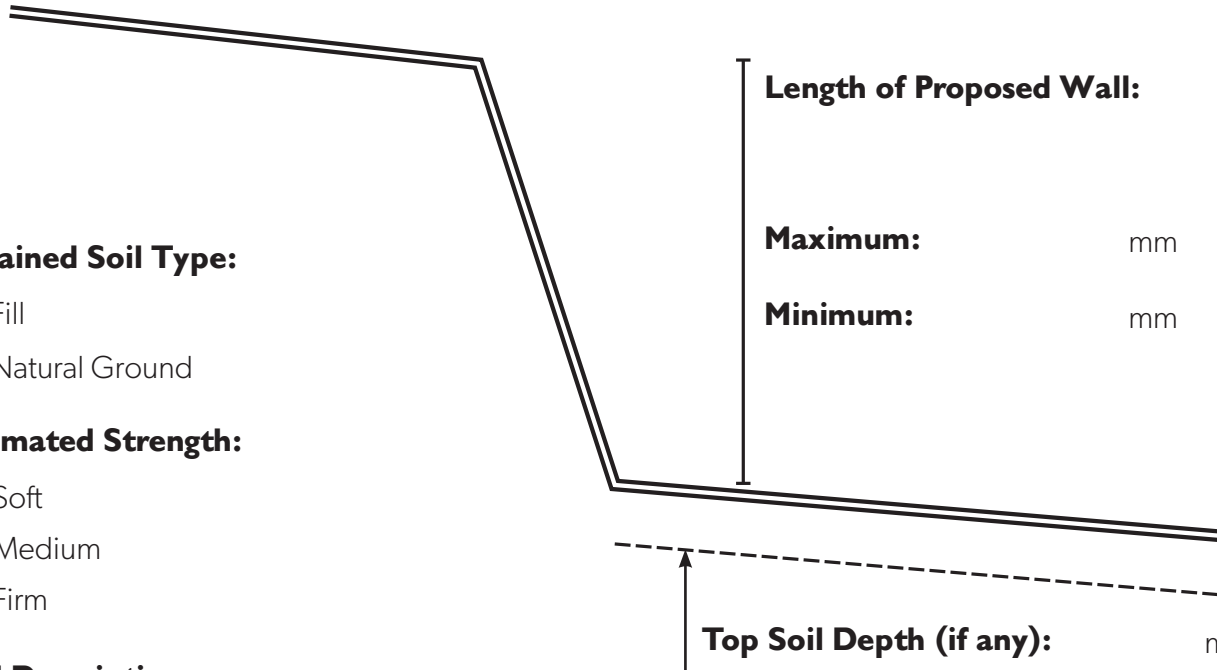

Retained Soil Type:

- Fill
- Natural Ground

Estimated Strength:

- Soft
- Medium
- Firm

Soil Description:

- Clay
- Sand
- Gravel
- Silt

Please supply photo of soil.

Any other Information Relevant to Site:

e.g. water seeping from site
Location of underground services
Location of other natural features, e.g. trees.


Please supply photo of site, and mark approx. position of wall.



Prolam®

Engineered Laminated Timber

ULTRA CRIB® PRODUCT SPECIFICATION SHEET

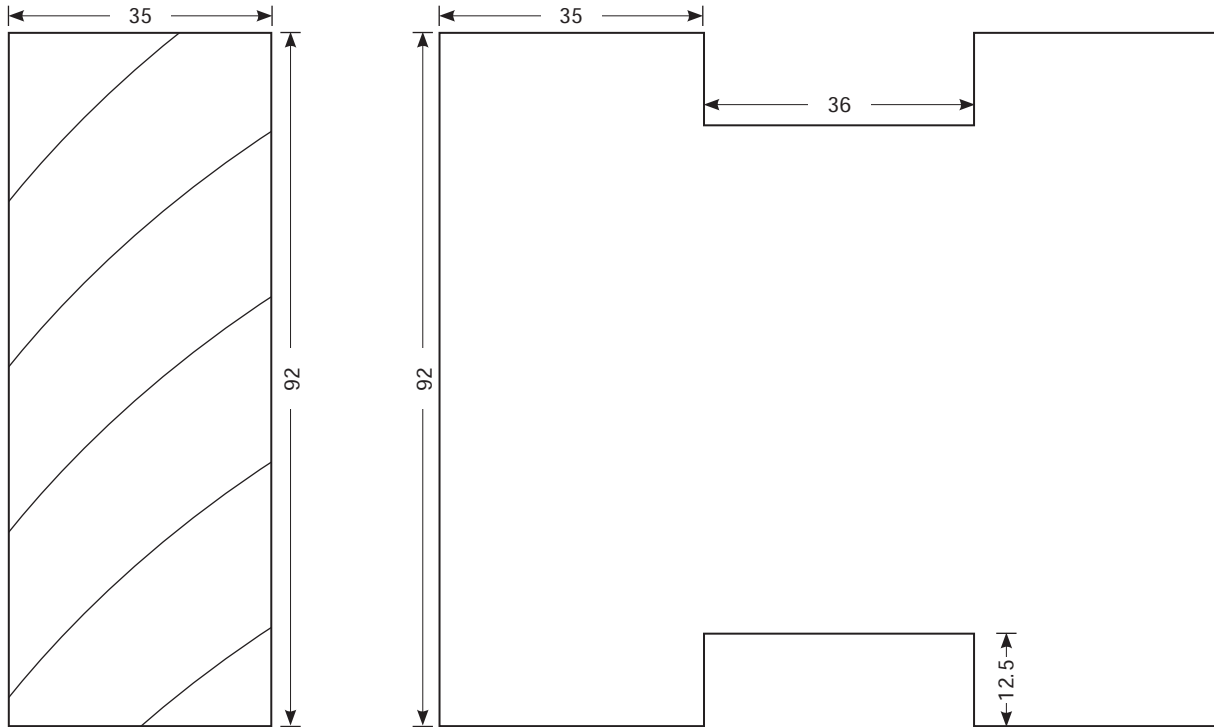

Specifications

Size: 95 x 34mm
Treatment: CCA H5 Wet
Lengths: As Required
Grade: No.1 Frame

Benefits:

- ✓ Economical
- ✓ Fast & Simple to Install
- ✓ Durable
- ✓ Attractive
- ✓ Can Be Used As Planter