



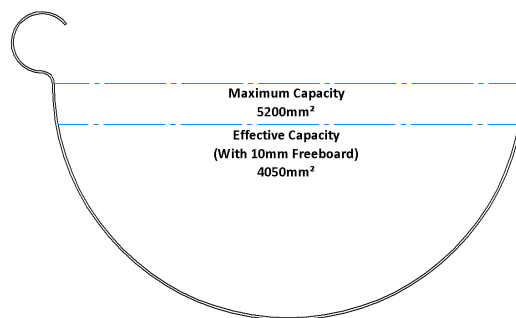

# HALO 125 HALF ROUND SPOUTING

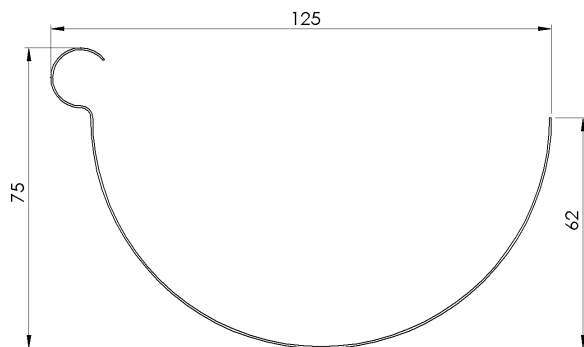

PRODUCT SPECIFICATIONS		CAPACITY SPECIFICATIONS	
<b>MagnaFlow™</b> Pre-painted Steel	0.55mm G300 with a minimum of 240gsm alloy/zinc coating.	Maximum cross sectional area	5,200mm <sup>2</sup>
<b>Pure Copper</b> Copper 3/4 Hard	0.55mm Grade C12200	Effective cross sectional area with 10mm freeboard	4,050mm <sup>2</sup>
Preston Bracket	3.00mm Aluminium 5052 H34 2.50mm Brass—hard	Flow Capacity	52 Litres/min
REV-5 Bracket	4.00mm Aluminium 6060 T5	Recommended fall	1:500 = 2mm per 1 metre
Recommended Maximum bracket spacing	750mm 600mm where snow fall is possible	Minimum Downpipe cross section	3,215mm <sup>2</sup>
Recommended Fixings	Minimum Class 4 screw &/or rivet fasteners compatible with substrate and bracket material.	Recommended round standard downpipe sizes	80mm Ø = 4,776mm <sup>2</sup> 65mm Ø = 3,215mm <sup>2</sup>

<b>Scope of use</b>	Continuous Group rainwater systems are intended to collect and channel water that runs off a roof. It is intended that the metal spouting be placed at the perimeter of the building (Positioned outside the building envelope).
<b>NZBC Compliance</b>	Test information available from Pacific Coilcoaters, New Zealand Steel and Ambro Metals, combined with past history of rainwater products indicate, that provided the product use and maintenance is in line with the guidelines contained in the current literature, Continuous Group rainwater systems can be expected to meet the performance criteria in clause E2 of the New Zealand building code.
<b>Durability</b>	All copper, brass and aluminium products listed above are fit for purpose in environment zone B, C, D and E* Pre-painted steel products are fit for purpose in environment Zone B and C* They may be used in environment zone D subject to a pre-approval warranty application based on site address* *In all cases, areas with high wind &/or salt &/or thermal/industrial atmospheric conditions may require specific engineering design (S.E.D) Reference: Section 4, "Durability" from NZS3604:2011.
<b>Maintenance</b>	Continuous Group rainwater systems require regular maintenance to ensure the useful life of the products. Minimum maintenance interval of every 6 months or as often as needed to avoid build up of contaminants (dirt, salt, pollen etc.) on the spouting surface. Simply spray and rinse with water and/or if necessary scrub with a soft nylon brush. More information and specific maintenance products are available on our website <a href="http://www.continuous.co.nz/care-and-maintenance">www.continuous.co.nz/care-and-maintenance</a>
<b>Warranty</b>	<b>MagnaFlow™</b> : Environment zone B & C—10 year paint warranty ; 12 year perforation warranty. <b>MagnaFlow™</b> : Environment zone D—10 year paint warranty ; 10 year perforation warranty. <b>Pure Copper</b> : 20 year material and perforation warranty. Full details and conditions of our comprehensive warranty can be found at <a href="http://www.continuous.co.nz/warranties">www.continuous.co.nz/warranties</a>