

Timber batten to suit seam height
by builder

Stop end roofing pan troughs

Verge flashing to suit

Euro Roof Double Standing Seam


Underlay

Plywood substrate

Continuous clip / cleat for flashing
fixing

Roof framing

Purlin

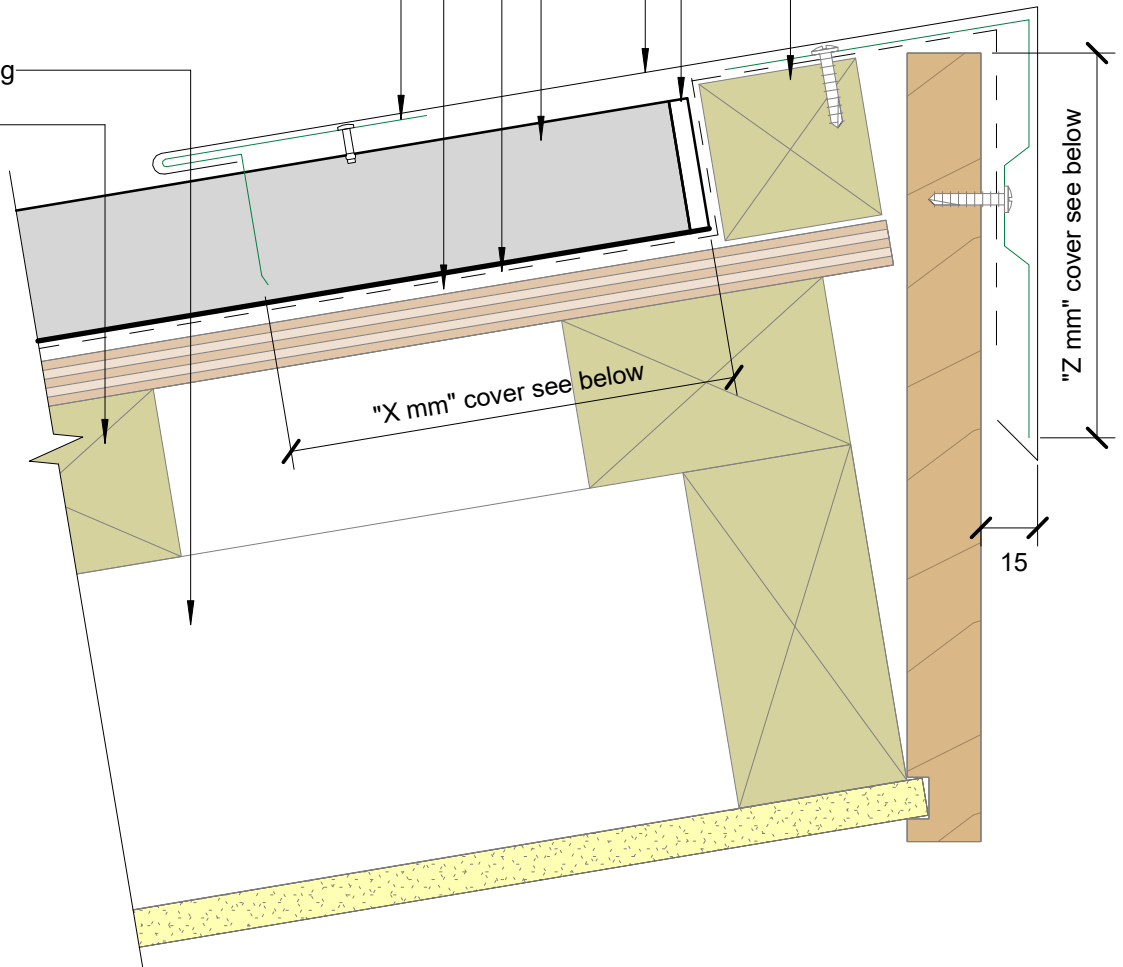

Aprons Typical (X mm):

130mm in situation 1: Low, Medium and High wind zones where roof pitch $\geq 10^\circ$

200mm in situation 2: All roof pitches in Very High wind zones
Low, Medium and High wind zones where roof pitch $\leq 10^\circ$

200mm in situation 3: All roof pitches in Extra High wind zones

Barge Typical (Z mm): excluding drip edge:

50mm in situation 1: Low, Medium and High wind zones where roof pitch $\geq 10^\circ$

70mm in situation 2: All roof pitches in Very High wind zones
Low, Medium and High wind zones where roof pitch $\leq 10^\circ$

90mm in situation 3: All roof pitches in Extra High wind zones