

Sanifos®610 GR

The Sanifos® 610 GR is a packaged pumping station for single dwelling use and is an efficient solution where gravity reliant sewerage systems are not possible due to limited site access and site constraints such as property sloping away from the sewer infrastructure.



SA303

WHY CHOOSE THIS PRODUCT?

Ideal for single dwelling residential or small commercial applications

Tough reliable macerator pump

Compact space saving tank design

Engineered to Australian Standards AS1546

Wired high level alarm

Choice of optional inlet connection points

Working temperature of 70°C max for short periods


IP68 rated

Complete package ready to install. Includes internal pipework, non return and ball valve supplied.

Energy saving and reduced motor wear thanks to large working volume.

VERTICAL/HORIZONTAL PERFORMANCE

Increase size of horizontal run by one pipe size after 5m. All horizontal pipework requires a minimum of 1:100 fall.



10 20 30 40506070 8090100110 metres

APPLICATIONS





T HAND





BATH SHOWER





WASHING DISH MACHINE WASHER



KITCHEN SINK

Product Reference: SA303

Sanipump Cutter



Robust blade suitable for heavy usage






Shaking up water


Made in France to the highest standards, needs to be installed by a licensed plumber


Sanifos®610 GR

TECHNICAL CHARACTERISTICS


Discharge Pipework	40 mm
Motor Power	1500 Watts
Voltages	220-240 V/50 Hz
Tank Volume	610 L
Working Waste Water Temp	35°C/Max 70°C (intermittent)
Overall Measurements	1140 x 1000 mm
Inlet Pipework	40/50/100 mm
IP Rating	IP68
Max Discharge	216 L/min

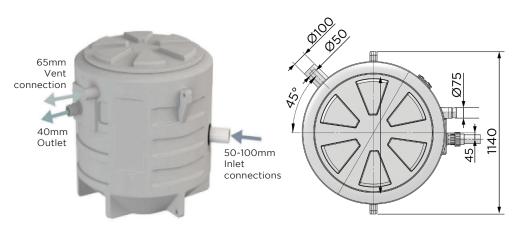





FLOW RATE PERFORMANCE CHART



APPLICATIONS


















WASHING DISH MACHINE WASHER



KITCHEN SINK

Product Reference: SA303





Optional tank extension ring



Shaking up water

Made in France to the highest standards, needs to be installed by a licensed plumber