


Dimensions of EcoTop 250L Hot Water Cylinder – Front connections

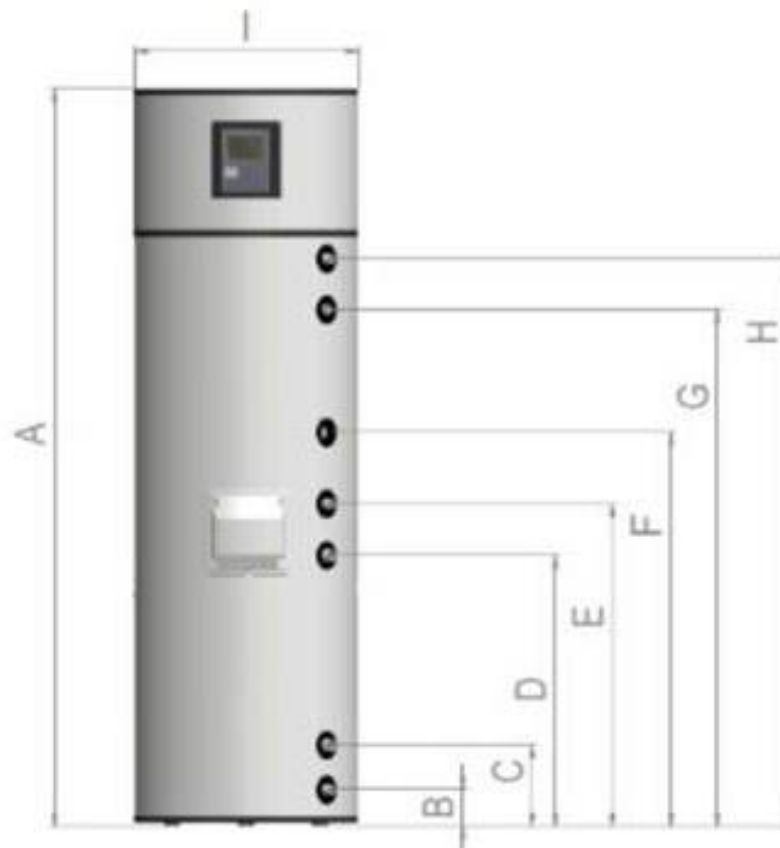

	∅ Pol.	200 l/IX mm	250 l/IX mm	300 l/IX mm	Obs.
A	-	1615	1915	1775	-
B	G ¾" M	99	99	107	Cold Water
C	G 1" M	215	215	236	Support Coil
D	G 1" M	706	706	636	Recirculation
E	G ¾" M	820	840	787	Magnesium Anode
F	G 1 ¼" M	940	1025	1096	PT Valve
G	G ½" F	1044	1343	1187	Hot Water
H	G ¾" M	1180	1475	1330	-
I	-	∅ 580	∅ 580	∅ 650	-

Note: The plumbing connections on the 250lt cylinder are at an angle of 45° to the right of the front (control panel).

The refrigeration pipes connections are the rear left, at an angle of 135°.

The element and thermostat are located behind the cover at the front below the control panel