


# Eco 300 and 500 location drawings

## Option 1 – Opening at both ends

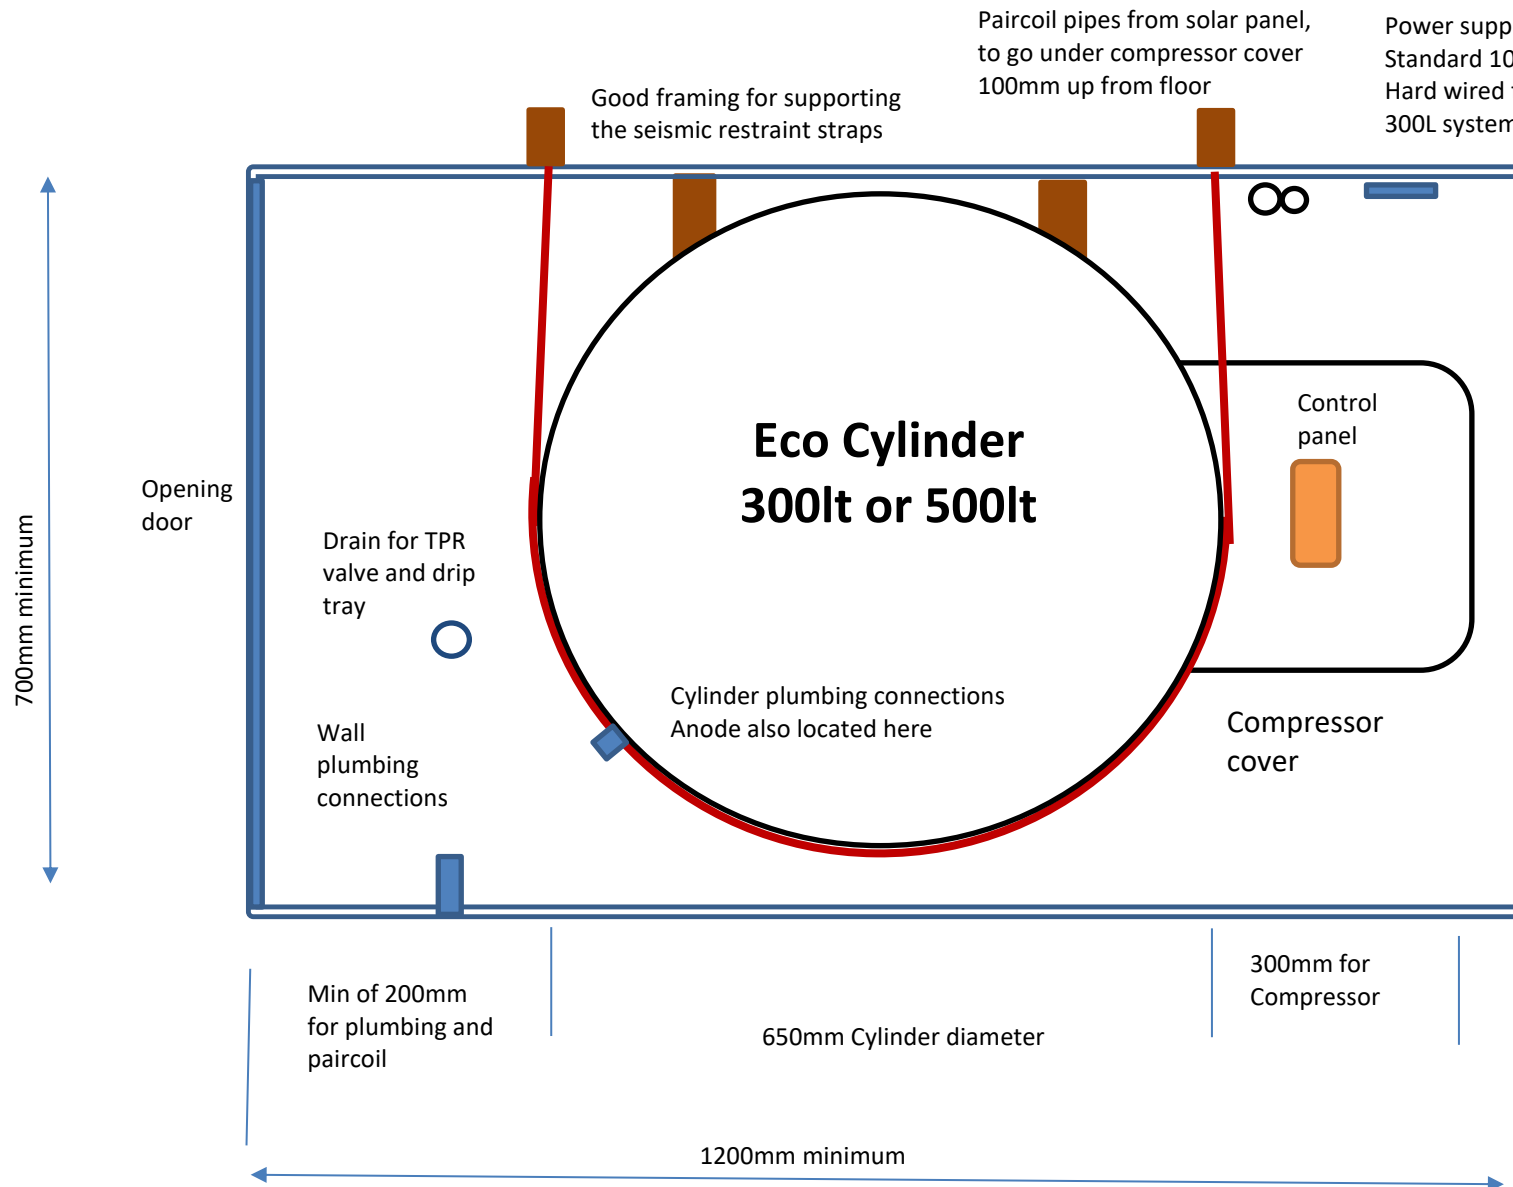


Opening door

Notes:

- Cylinder can be fitted sideways in either direction
- The 300L cylinder is 1415mm high
- The 500L cylinder is 1990mm high
- Space must be left to access the anode on the side of the cylinder.
- **The Cylinder is rated for 7bar and comes with a 700kPa TPR valve. You will need to use a 500kPa Cold water expansion valve.**


# Option 2 – Cylinder mounted side on-

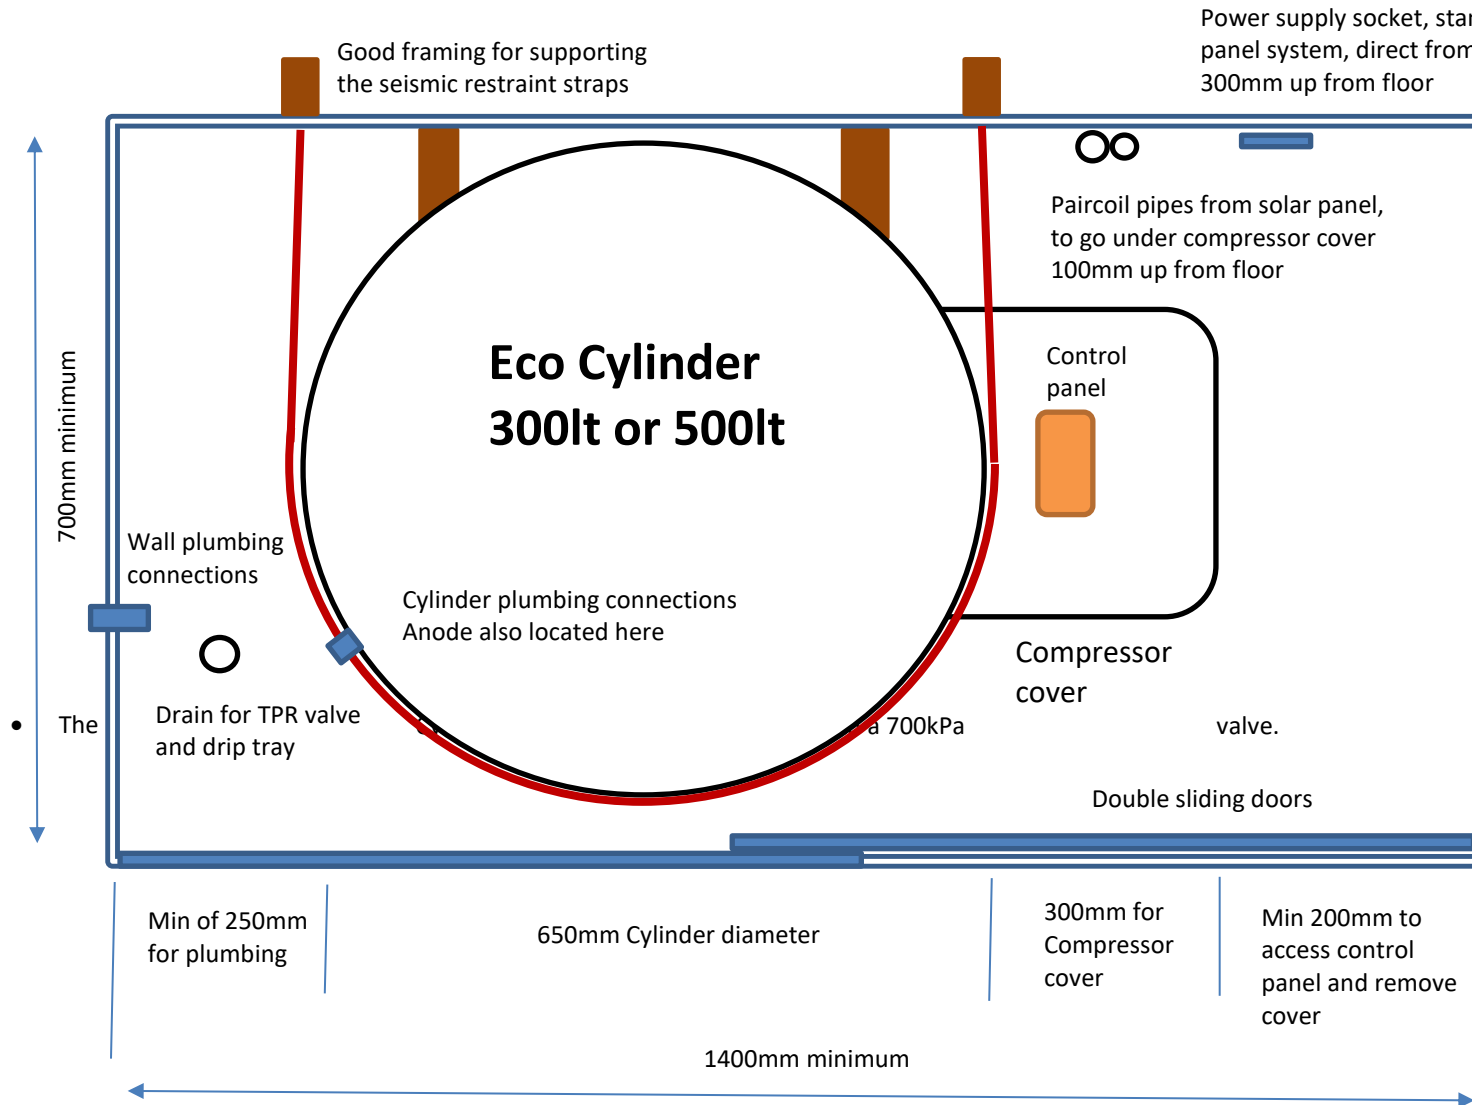

**Notes:**

- Cylinder can be fitted sideways in either direction
- The 300L cylinder is 1415mm high
- The 500L cylinder is 1990mm high
- Space must be left to access the anode on the side of the cylinder.
- **The Cylinder is rated for 7bar and comes with a 700kPa TPR valve. You will need to use a 500kPa Cold water expansion valve.**


# Option 3 – Cylinder mounted to a wall (ceiling space or garage etc)

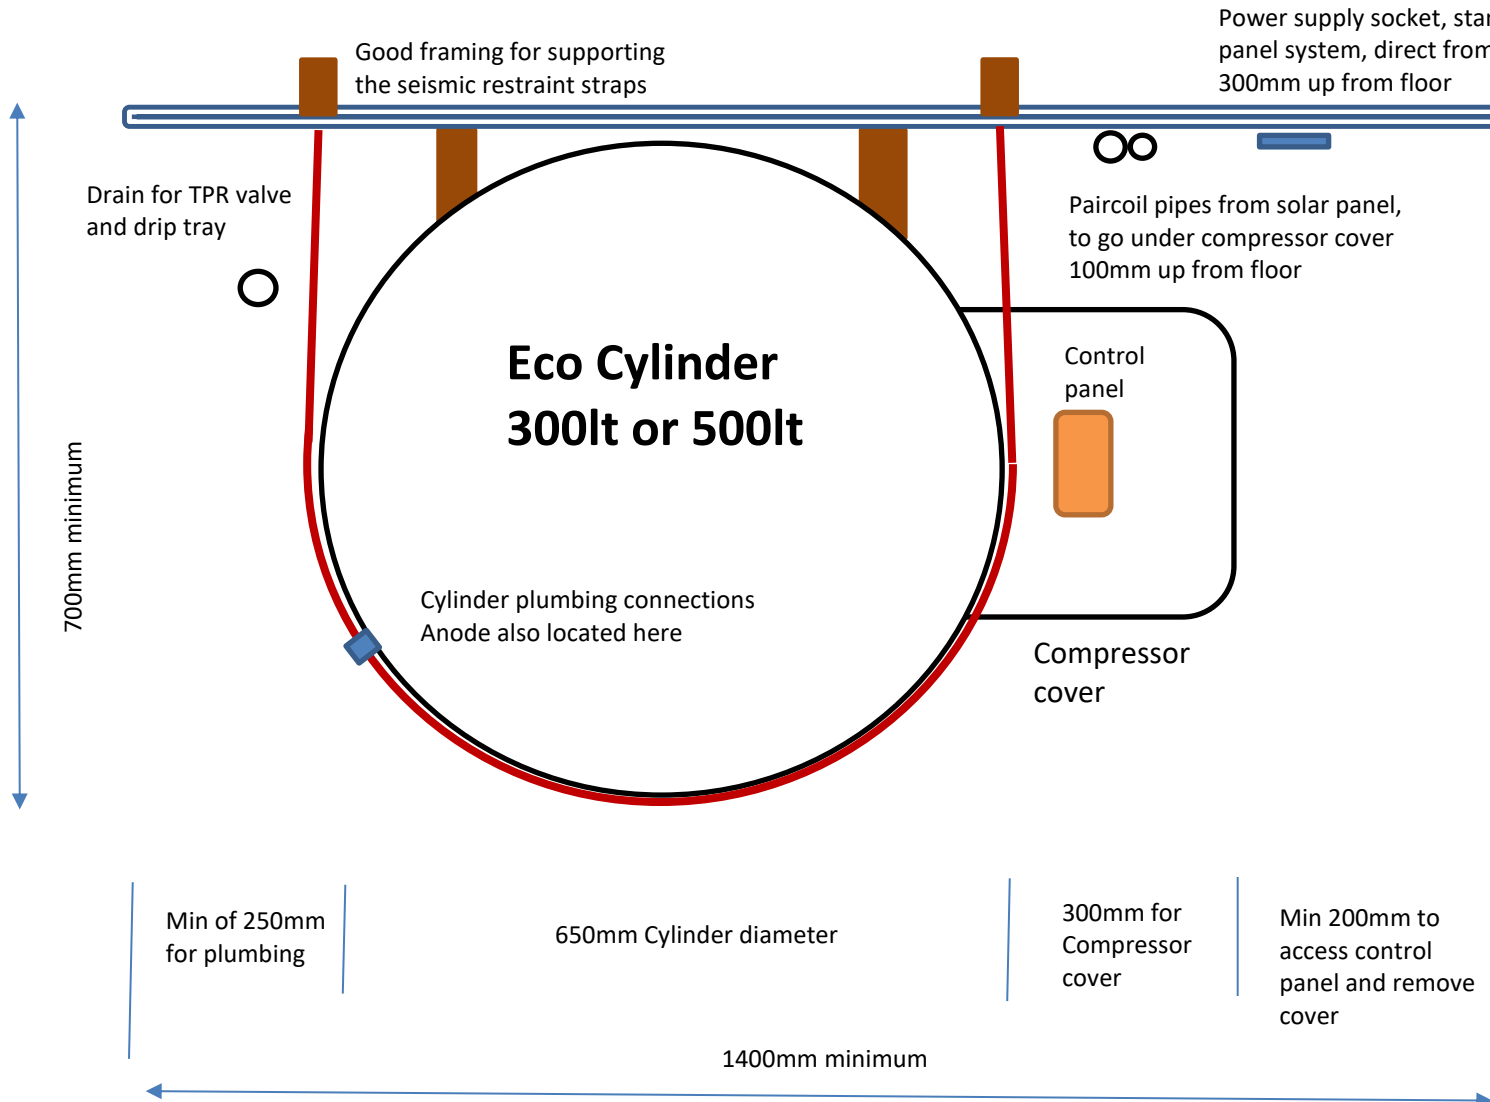

### Notes:

- Cylinder can be fitted sideways in either direction
- The 300L cylinder is 1415mm high
- The 500L cylinder is 1990mm high
- Space must be left to access the anode on the side of the cylinder.
- **The Cylinder is rated for 7bar and comes with a 700kPa TPR valve. You will need to use a 500kPa Cold water expansion valve.**

# Option 3 – Cylinder mounted to a wall (on an angle out from wall)

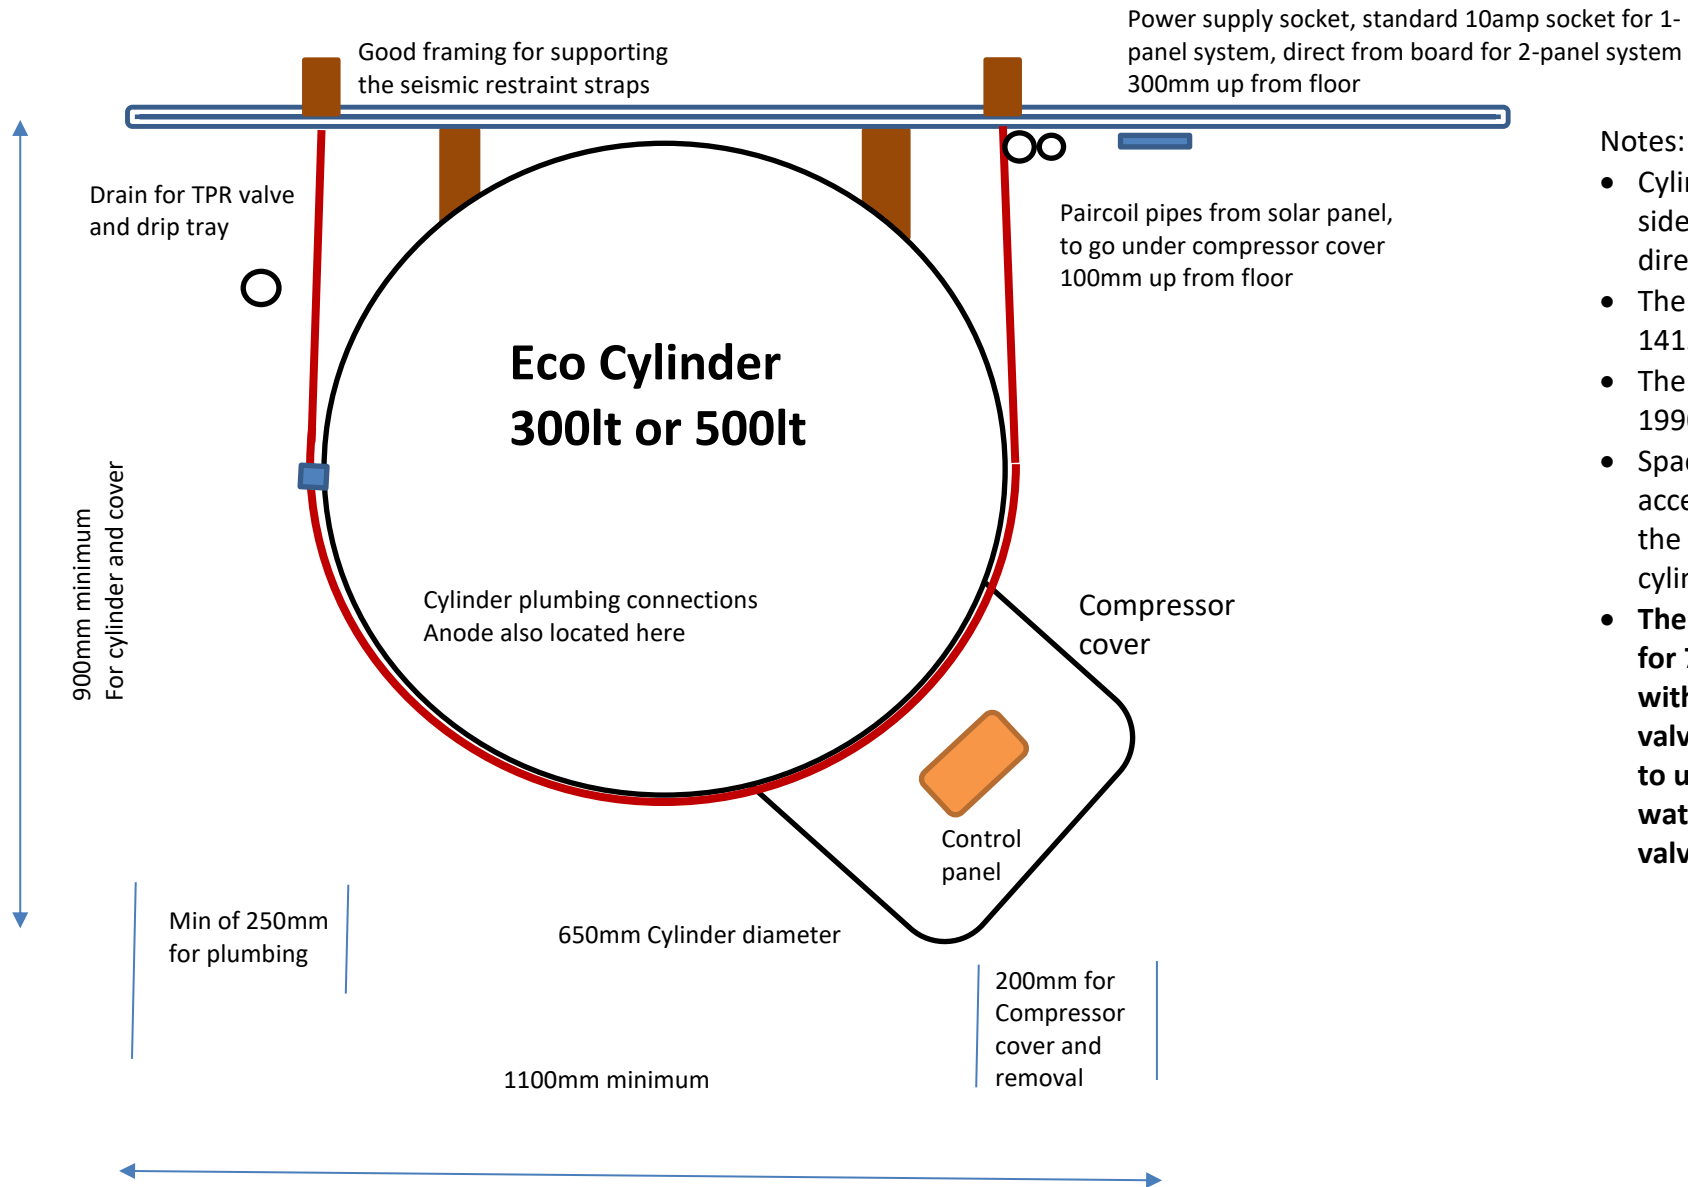

## Notes:

- Cylinder can be fitted sideways in either direction
- The 300L cylinder is 1415mm high
- The 500L cylinder is 1990mm high
- Space must be left to access the anode on the side of the cylinder.
- **The Cylinder is rated for 7bar and comes with a 700kPa TPR valve. You will need to use a 500kPa Cold water expansion valve.**