

EASY BAND

UNIVERSAL SINGLE-SIDED TAPE



VERSATILE


Progress adhesion, stable over time, for the most common supports.

INDUSTRIAL USE

Adhesive mix and versions designed for prefabrication are also available.

COMPOSITION

- ① support: PE film
- ② glue: acrylic dispersion without solvents
- ③ reinforcing layer: polyester reinforcing grid
- ④ glue: acrylic dispersion without solvents
- ⑤ release liner: silicone coated paper

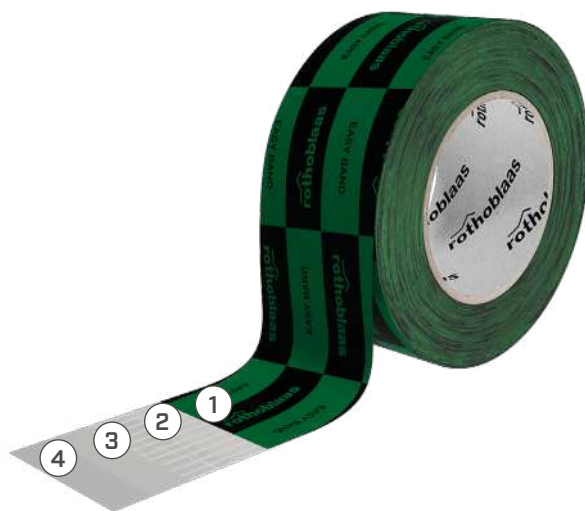

TECHNICAL DATA

Properties	standard	value	USC units
Thickness	-	0,28 mm	11 mil
Adhesion strength on OSB at 90° after 10 minutes	EN 29862	4,5 N/10 mm	2.6 lbf/in
Adhesion strength on OSB at 180° after 10 minutes	EN 29862	10,0 N/10 mm	5.7 lbf/in
Adhesion strength (average) on membrane in PP after 24 hours ⁽¹⁾	EN 12316-2	26,0 N/50 mm	3.0 lbf/in
Shear adhesion strength of the joint on membrane in PP after 24 hours ⁽²⁾	EN 12317-2	55,0 N/50 mm	6.3 lbf/in
Adhesion strength on steel at 180°	EN ISO 29862	> 30 N/25 mm	8 lbf/in
Water vapour transmission (Sd)	EN ISO 12572	40 m	0.09 US Perm
Exposure to weather	-	4 months	-
Application temperature ⁽³⁾	-	-10/+40 °C	+14/+212 °F
Resistance to temperature	-	-40/+100 °C	-40/+212 °F
Storage temperature ⁽⁴⁾	-	+15/+25 °C	+59/+77 °F
French VOC classification	ISO 16000	A+	-
Emicode	GEV test procedure	EC1 plus	-
Solvents	-	no	-

⁽¹⁾ Minimum required value according to DTU 31.2 P1-2 (France): 15 N/50 mm.

⁽²⁾ Minimum required value according to DTU 31.2 P1-2 (France): 40 N/50 mm.

⁽³⁾ On dry support and at a temperature > 0 °C. The absence of condensation or frost on the surface must be guaranteed.




⁽⁴⁾ Store the product in a cool, dry place for no more than 12 months.

Waste classification (2014/955/EU): 08 04 10.

CODES AND DIMENSIONS

CODE	B [mm]	L [m]	B [in]	L [ft]	
EASY50XL	50	50	2.0	164	12
EASY60XL	60	50	2.4	164	10

■ FIELDS OF APPLICATION

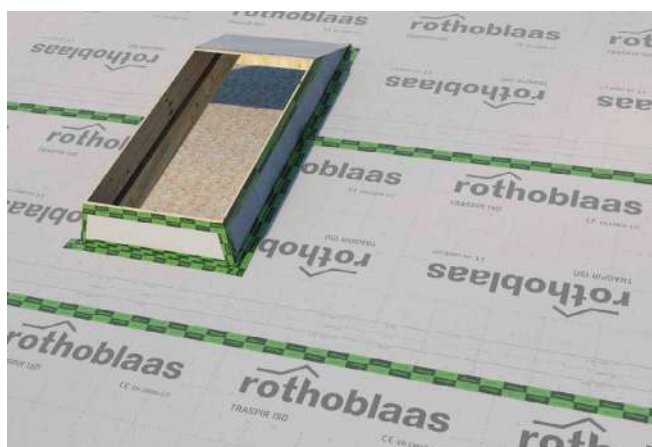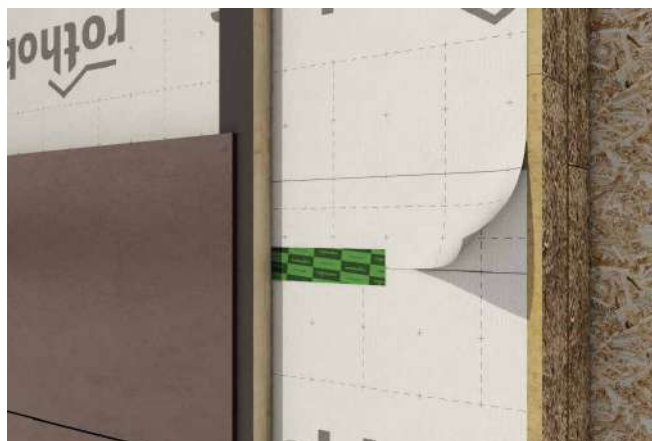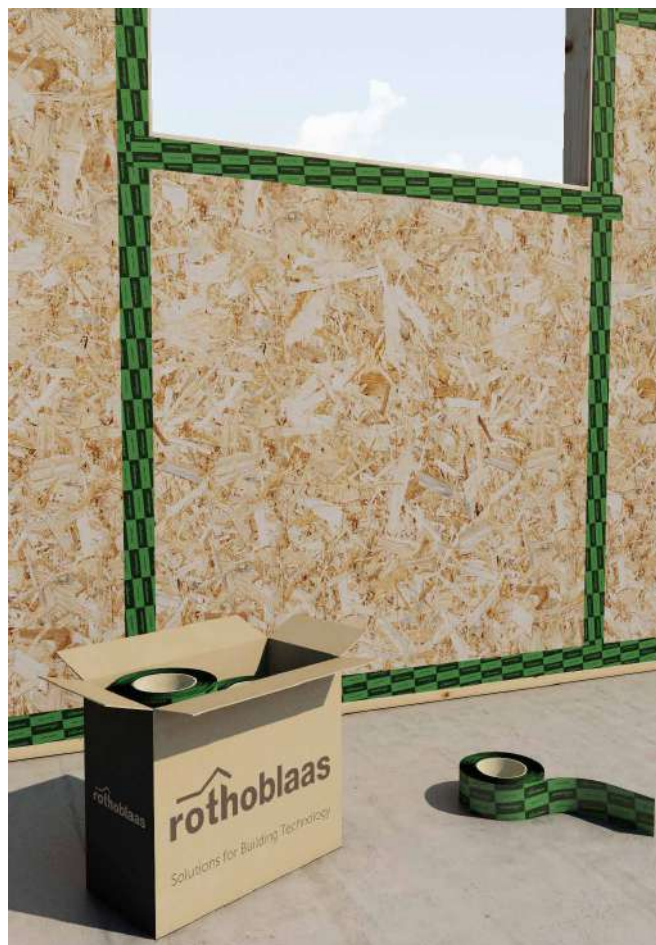

■ RELATED PRODUCTS



PRIMER SPRAY
page 112




PRIMER
page 113



CUTTER
page 394



ROLLER
page 393

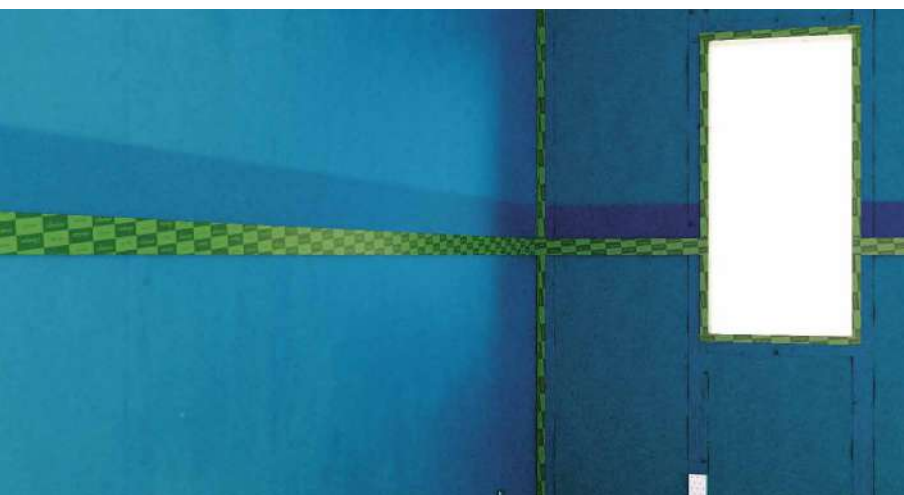

COST-PERFORMANCE

The packaging and the mix of glue and carrier made it possible to obtain a very good product at a low cost.

ALSO FOR WARM CLIMATES

The type and amount of glue, as well as the choice of carrier make this tape suitable for sealing smooth surfaces exposed to high temperatures. As a result, tape slippage is prevented in situations where the glue would normally soften.