
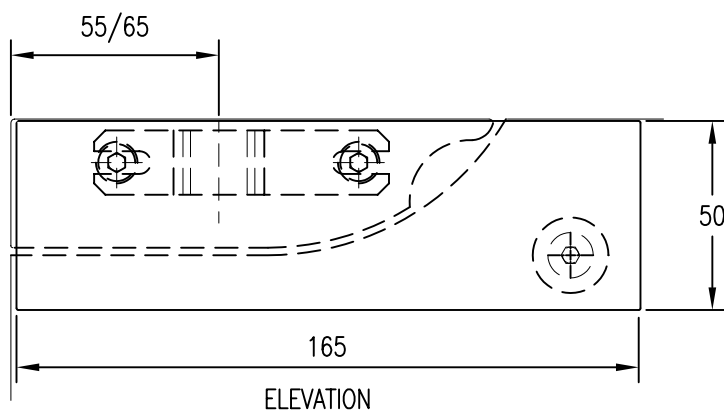






Architectural Glass Fittings Catalogue


Door Control Hardware	Section	1
Rail Assemblies	Section	2
Patch Fittings	Section	3
Patch Locks	Section	4
Commercial Door Handles	Section	5
Point Fixings, Spacers & Hinges	Section	6
Shower Fittings	Section	7
Sliding Door & Operable Wall Systems	Section	8
Pool Gate & Balustrade Fittings	Section	9
Structural Fittings	Section	10
Panic Hardware	Section	11
Miscellaneous Hardware	Section	12


CD52

TOP PATCH

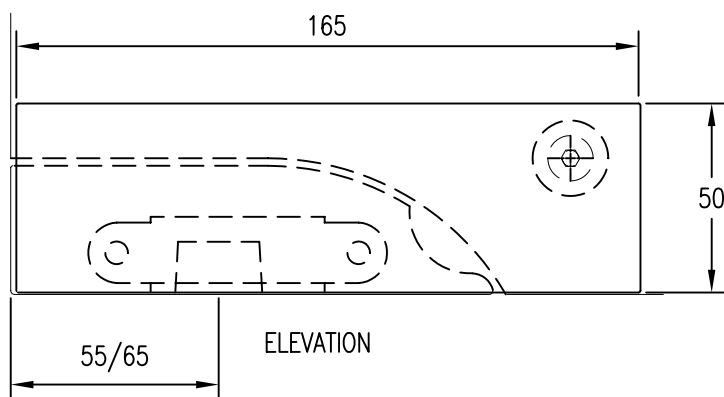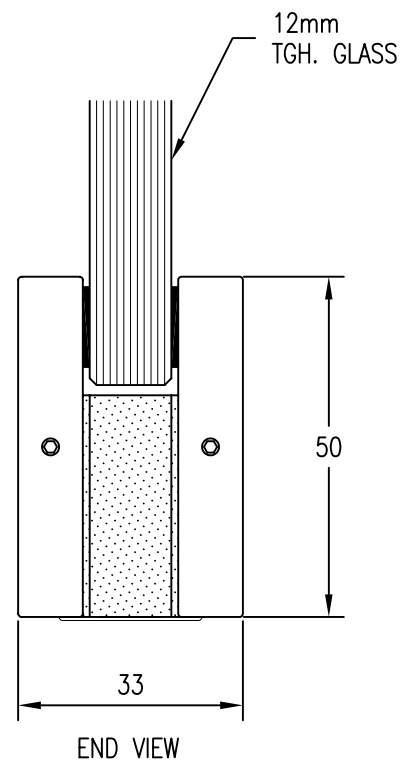
CD51

BOTTOM PATCH

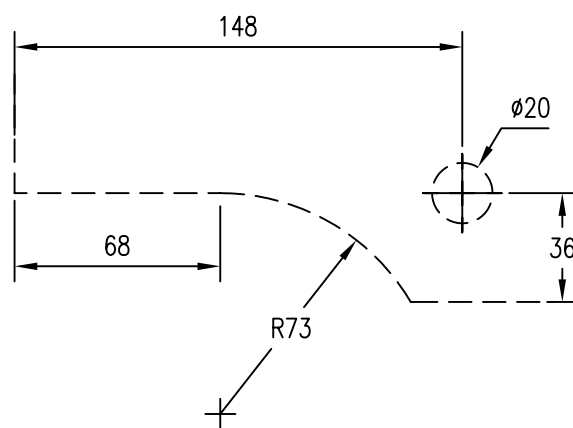


CD51/52 GLASS PREPARATION

CD51/52 SPECIFICATION: ON-EAZI 50mm x 165mm Bottom & Top Patch Fittings with Covers, to suit DORMA BTS Floor Springs or Free Pivots. Pivot Point set at 55mm or 65mm. Specify Glass Thickness 10, 12 or 15mm.


FINISHES:

ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

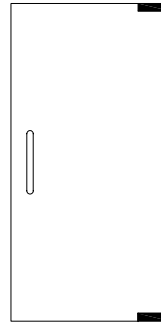


PT20

TOP PATCH

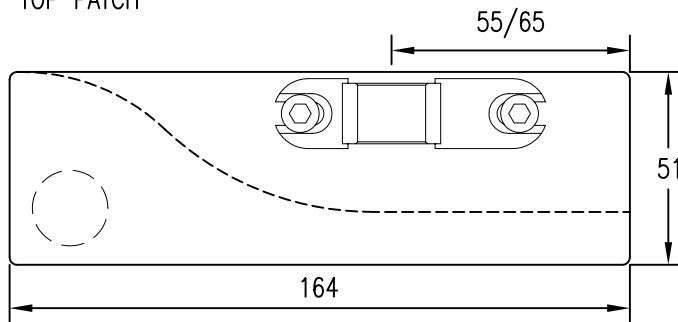


ELEVATION

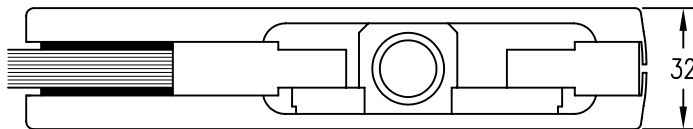


PLAN

PT10


BOTTOM PATCH

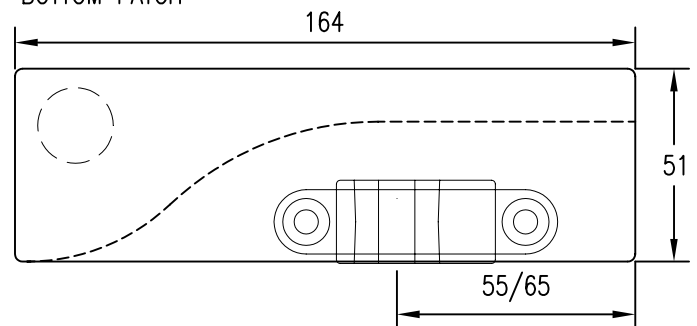

ELEVATION

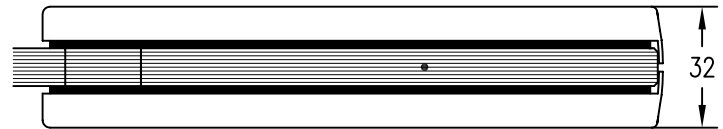

PLAN





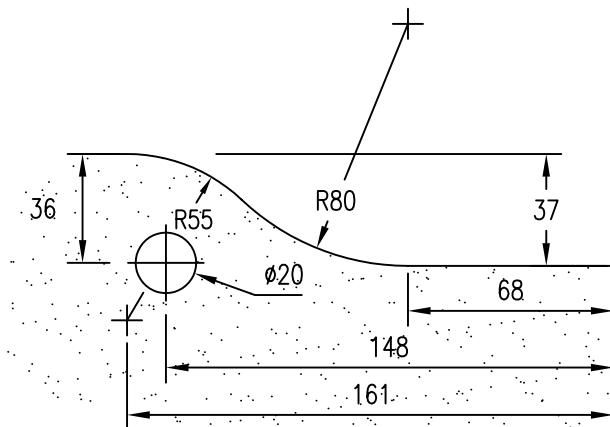


PT10/20 GLASS PREPARATION

PT10/20 SPECIFICATION: Universal 51mm x 164mm Bottom & Top Patch Fitting with Covers, to suit DORMA BTS Floor Springs or Free Pivots. Pivot Point set at 55mm or 65mm. Specify Glass Thickness 10, 12 or 15mm.

FINISHES:




ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

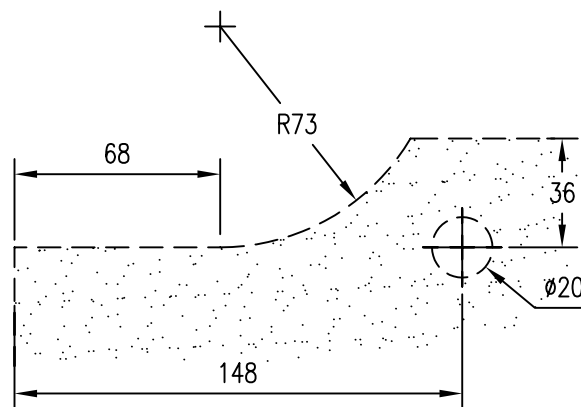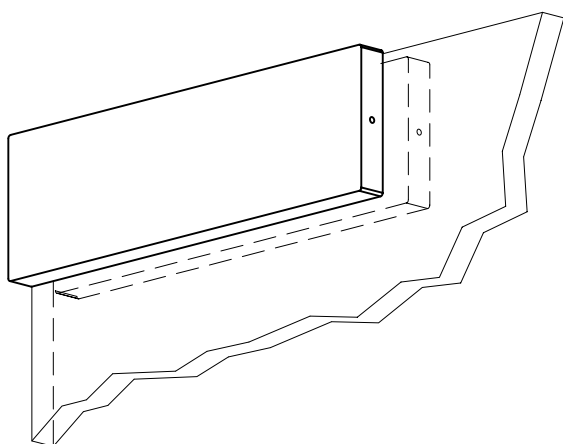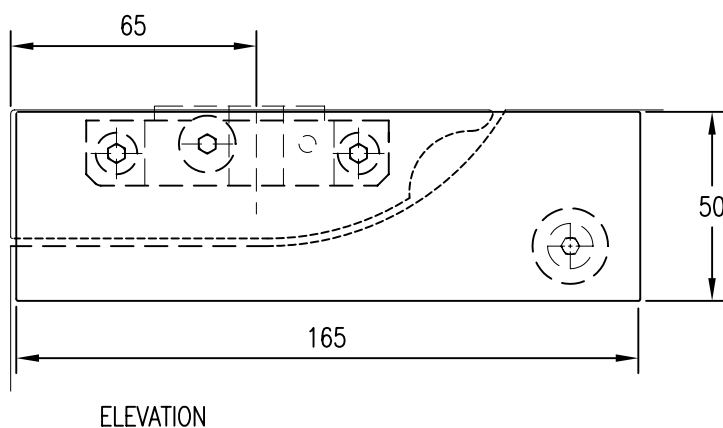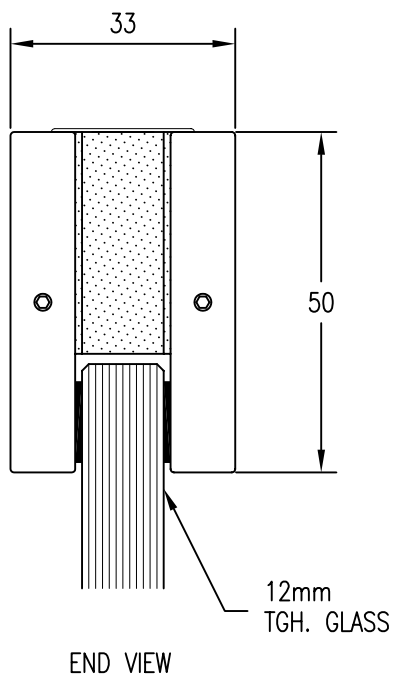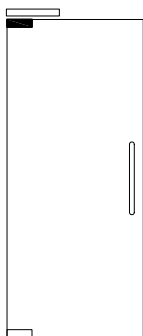


CD52 RTS SPECIFICATION: ON-EAZI 50mm x 165mm Top Patch Fitting with Covers, to suit DORMA RTS Transom Closers. Pivot Point set at 65mm. Specify Glass Thickness 10, 12 or 15mm.

FINISHES:


ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

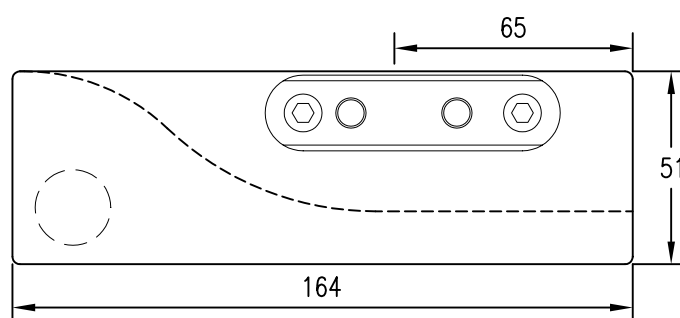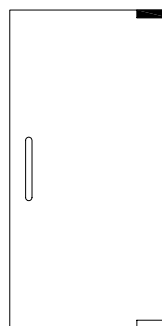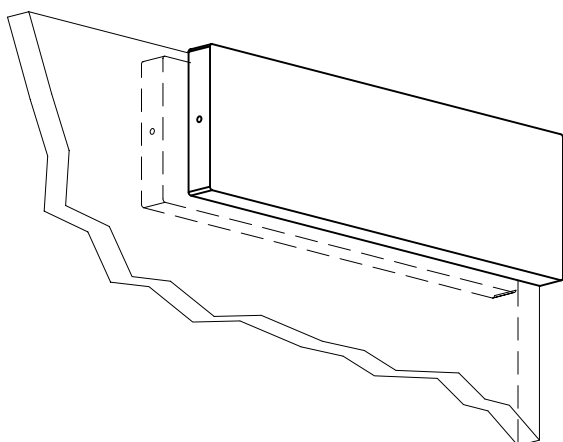

ELEVATION

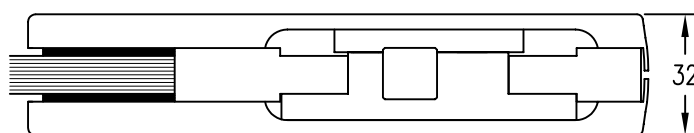

PLAN


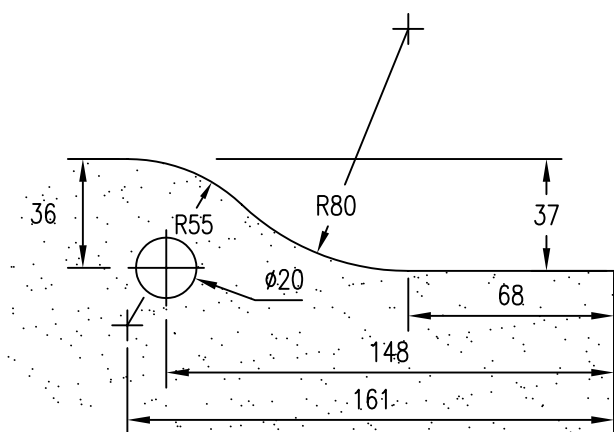


GLASS PREPARATION


PT22 SPECIFICATION: Universal 51mm x 164mm Top Patch Fitting with Covers, to suit DORMA RTS Transom Closers. Pivot Point set at 65mm. Specify Glass Thickness 10, 12 or 15mm.

FINISHES:


ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

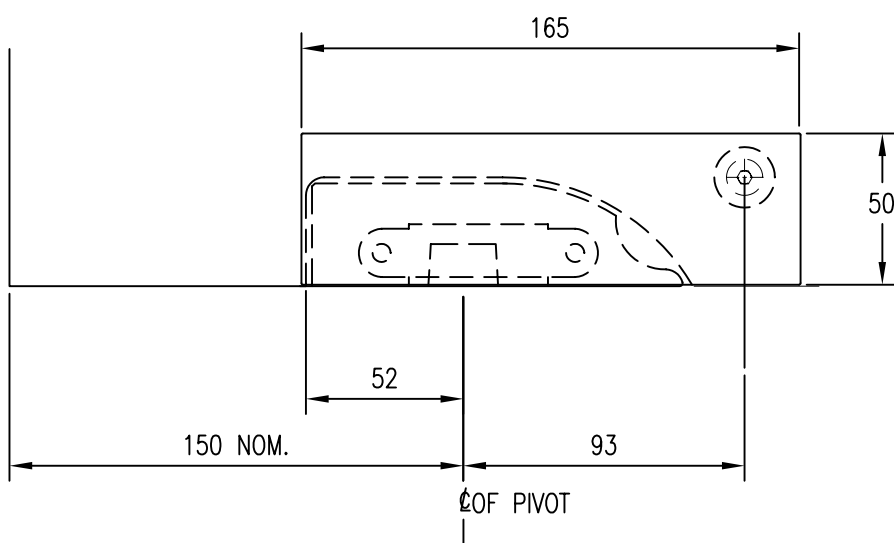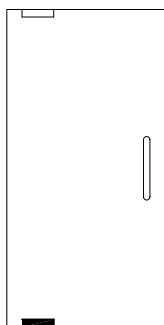


ELEVATION

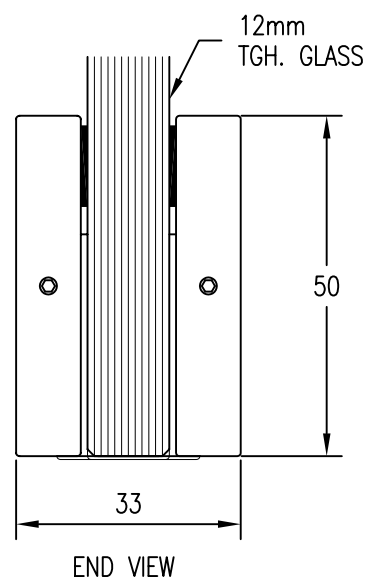

END VIEW

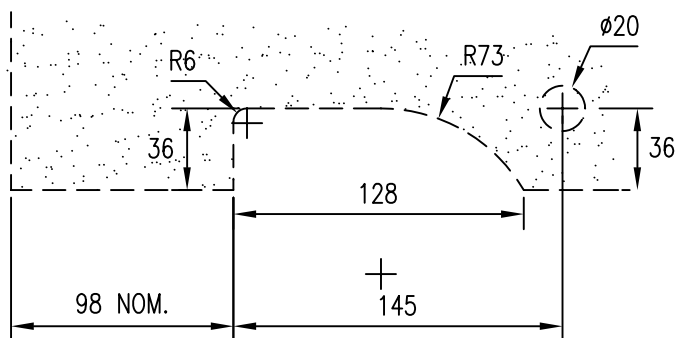



GLASS PREPARATION
SUIT 150MM PIVOT POINT

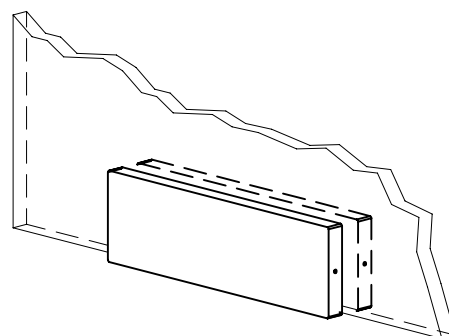


CD51 C/F SPECIFICATION: ON-EAZI 50mm x 165mm Bottom Patch Fitting with Covers, to suit DORMA BTS Floor Springs or Free Pivots. Patch is modified to be centre fixed on glass providing Pivot Point of 150mm or greater. Specify Glass Thickness 10, 12 or 15mm.

FINISHES:



ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

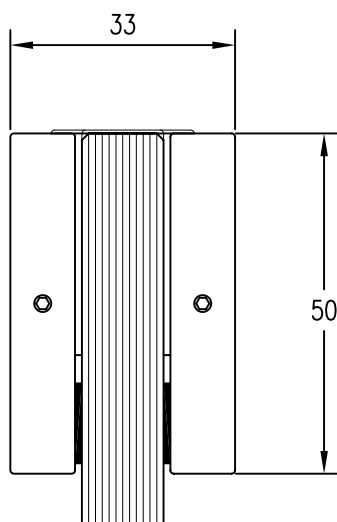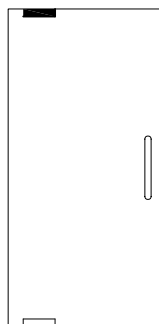

END VIEW

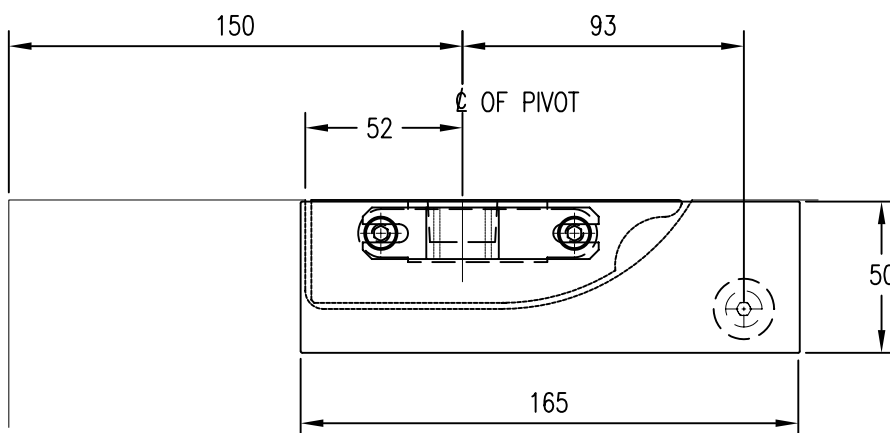

ELEVATION

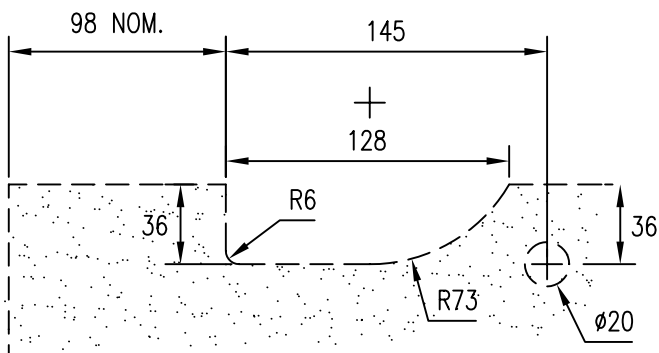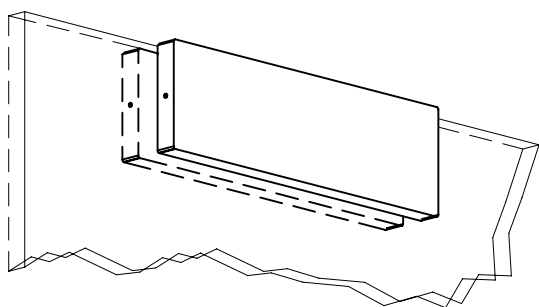


GLASS PREPARATION
SUIT 150MM PIVOT POINT

CD52 C/F SPECIFICATION: ON-EAZI 50mm x 165mm Top Patch Fitting with Covers, to suit DORMA 15mm Diameter Top Pivots. Patch is modified to be centre fixed on glass providing Pivot Point of 150mm or greater. Specify Glass Thickness 10, 12 or 15mm.


FINISHES:

ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

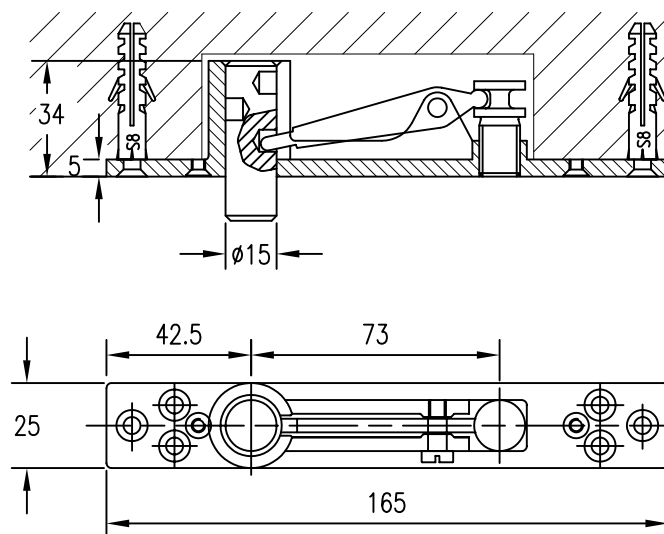


8066U

WIND DOWN 15MM UPPER PIVOT ASSEMBLY
OPTIONAL COVER PLATE: 8064 SSS

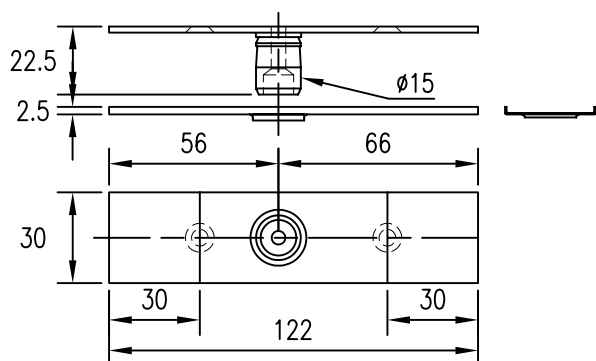


CD58

15MM UPPER PIVOT ASSEMBLY WITH COVER

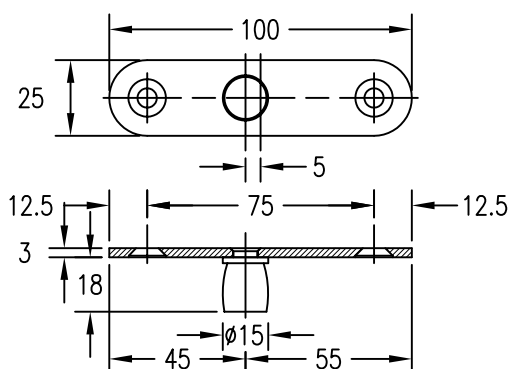


PT24

FIXED PLATE 15MM UPPER PIVOT ASSEMBLY

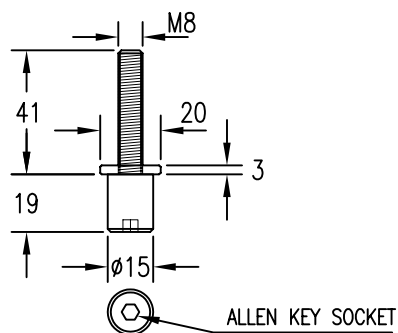


CD59

M8 THREADED 15MM UPPER PIVOT

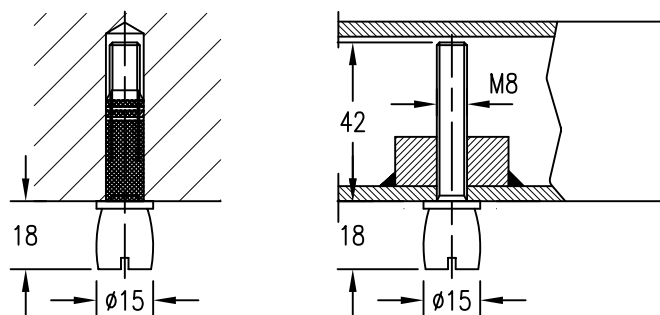


PT25



M8 THREADED 15MM UPPER PIVOT

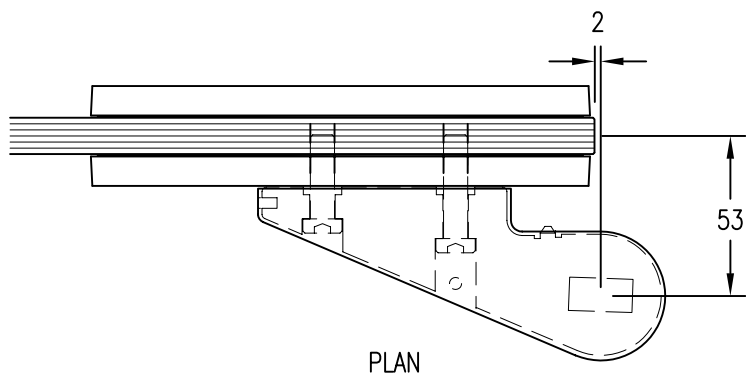


PLAN

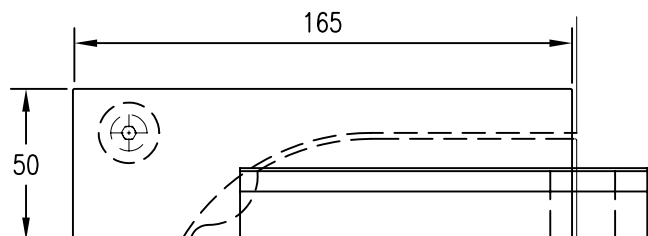


ELEVATION

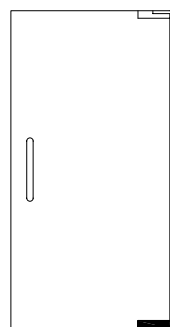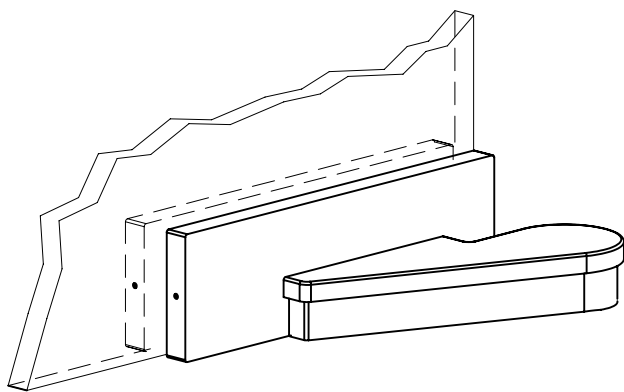

12mm
TGH. GLASS

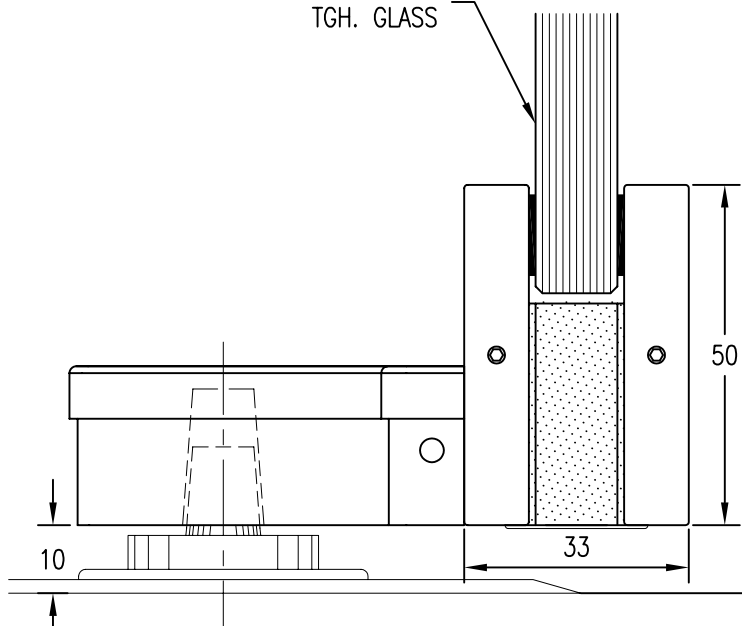

END VIEW





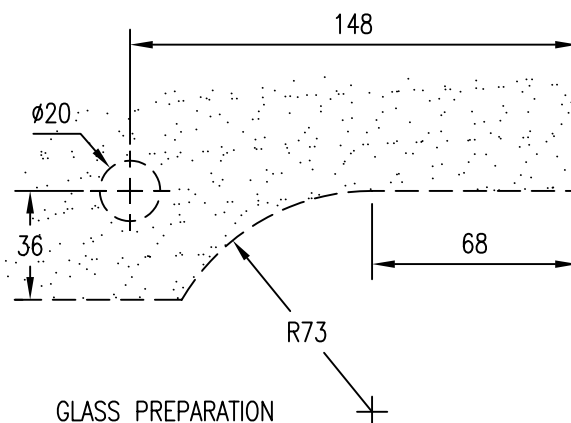


GLASS PREPARATION

CD51L SPECIFICATION: ON-EAZI 50mm x 165mm Bottom Offset Patch Fitting with Covers, to suit DORMA BTS Floor Springs or Free Pivots. Pivot Offset 53mm from centre line of glass.
Specify Glass Thickness 10, 12 or 15mm.
Specify CD51R for opposite hand.
Note: Offset Pivot Assembly finished in SAA, SSS or PSS only.
MAX DOOR WEIGHT: 100kg's
ILLUSTRATED with CD355 Floor Pivot.

FINISHES:





ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

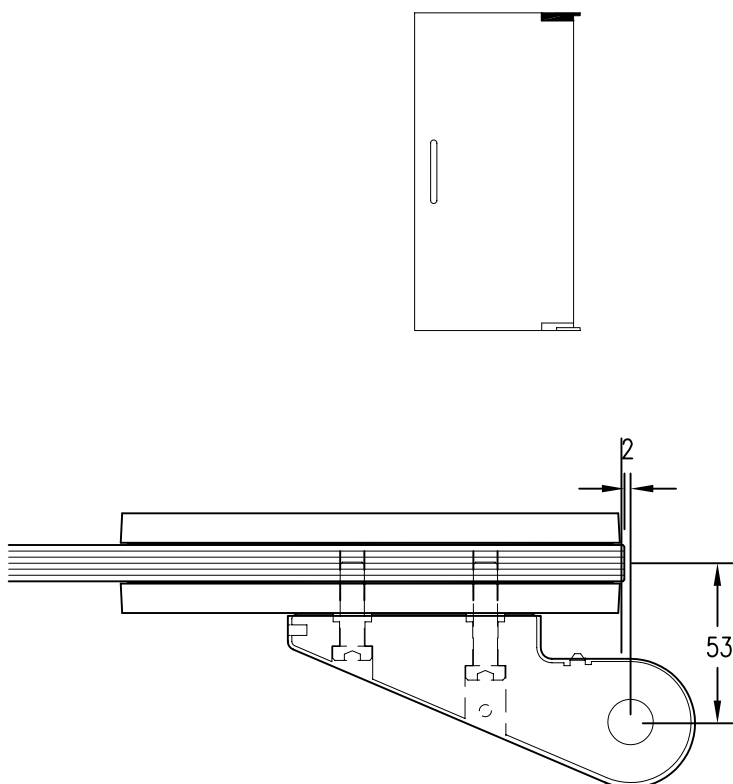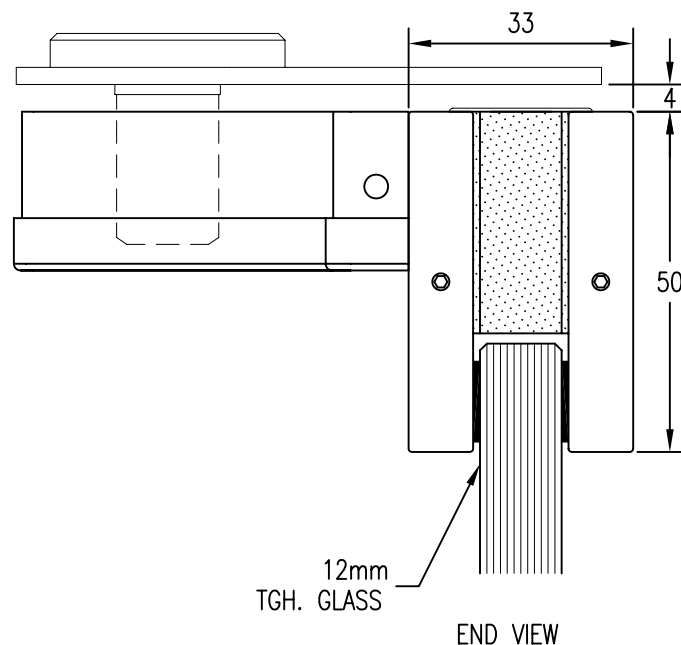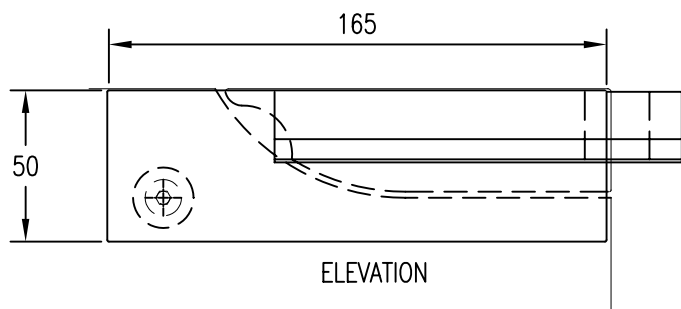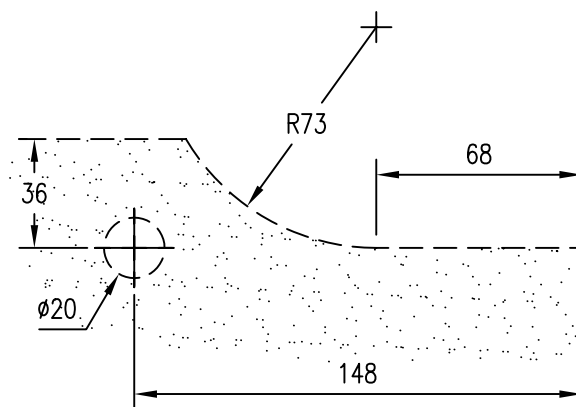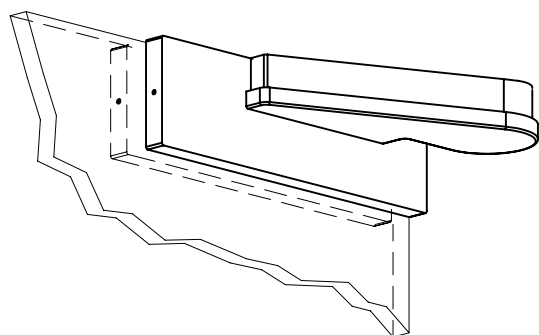
PLAN

END VIEW

ELEVATION

GLASS PREPARATION

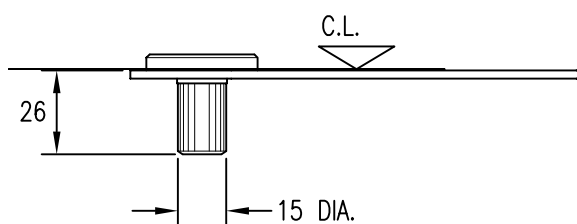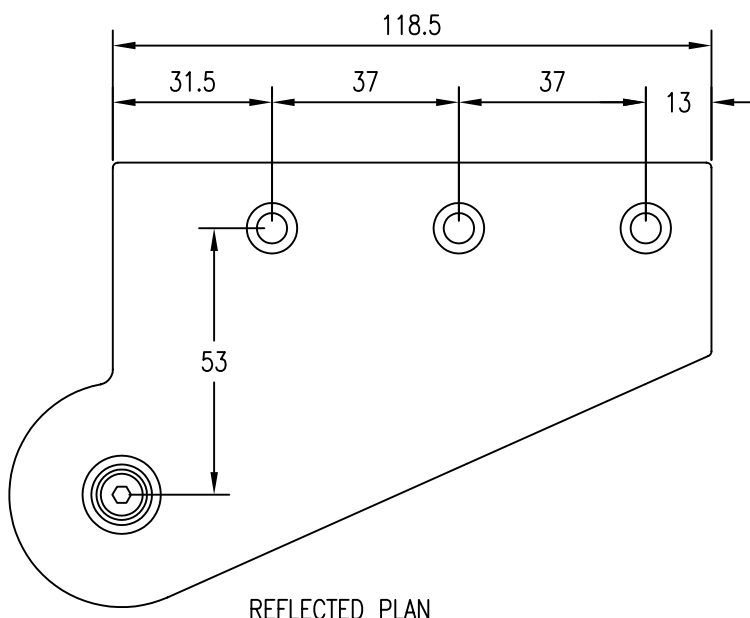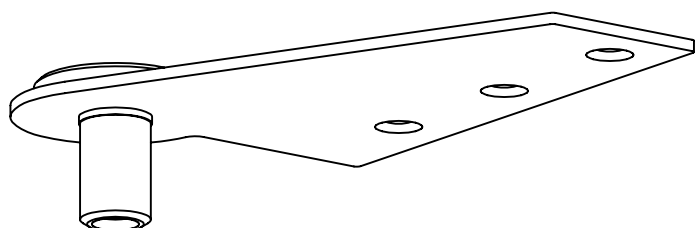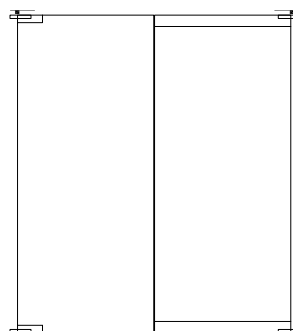CD52L SPECIFICATION: ON-EAZI 50mm x 165mm Top Offset Patch Fitting with Covers, to suit CD58 Offset Top Pivot.
Pivot Offset 53mm from centre line of glass.
Specify Glass Thickness 10, 12 or 15mm.
Specify CD52R for opposite hand.
Note: Offset Pivot Assembly finished in SAA, SSS or PSS only.
MAX DOOR WEIGHT: 100kg's
ILLUSTRATED with CD58 Offset Top Pivot.

FINISHES:



ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		



CD58 L/R SPECIFICATION: ON-EAZI Offset Top Pivot with 15mm Pivot Pin to suit CDS Offset Rails and Patch Fittings.
SPECIFY: Handing LH / RH (RIGHT HAND DRAWN)
MAX DOOR WEIGHT: 100kg's

FINISHES:


ALUMINIUM	STAINLESS
SAA	SSS
	PSS

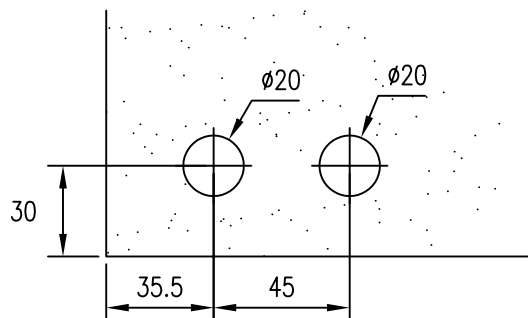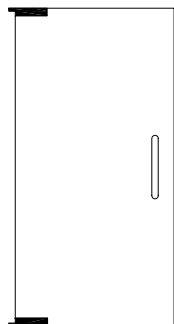


311.2 & 312.1 GLASS PREPARATION

311.1


LOWER OFFSET PATCH FITTING

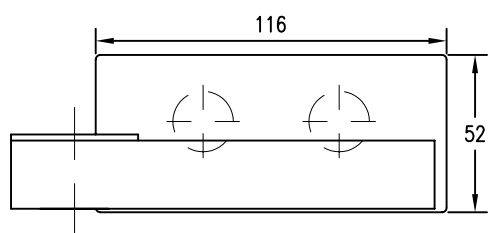

ELEVATION

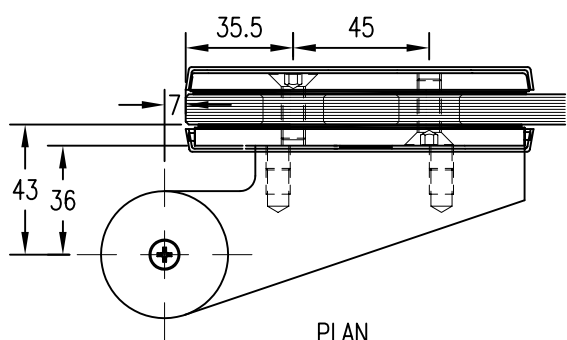


PLAN

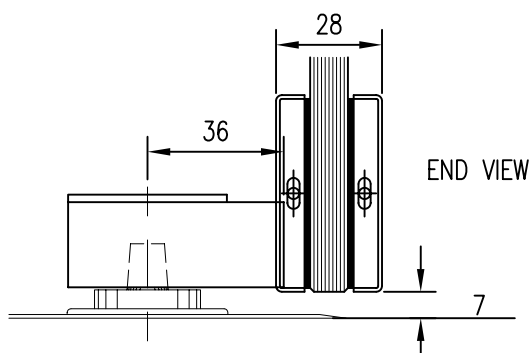


END VIEW

312.1


UPPER OFFSET PATCH FITTING

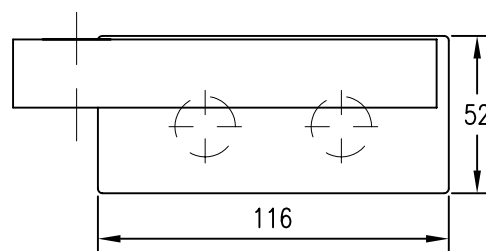

ELEVATION

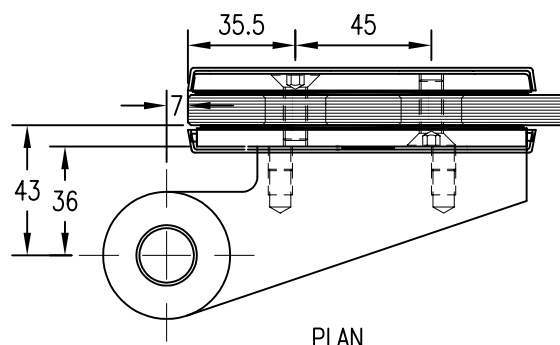

PLAN

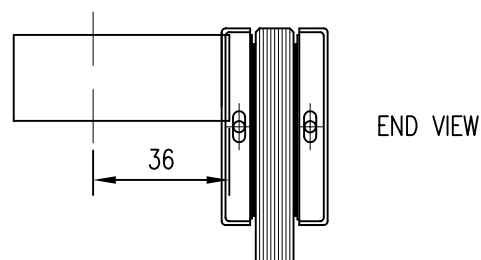



END VIEW

311.1 & 312.1 SPECIFICATION: Universal 52mm x 116mm 311.1 Lower Offset Patch Fitting & 312.1 Upper Offset Patch Fitting to suit DORMA BTS Floor Springs, Pivot Bearings and Upper Pivots. Specify Glass Thickness 10, or 12mm. SPECIFY: Handing LH / RH (LEFT HAND DRAWN) MAX DOOR WEIGHT: 90kg's MAX DOOR WIDTH: 1000mm

FINISHES:


ALUMINIUM

SAA

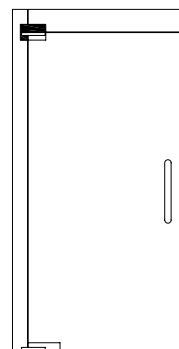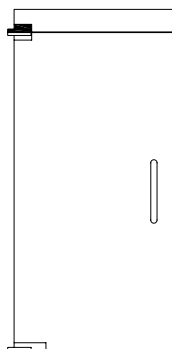


326.1


OVERPANEL OFFSET PATCH FITTING

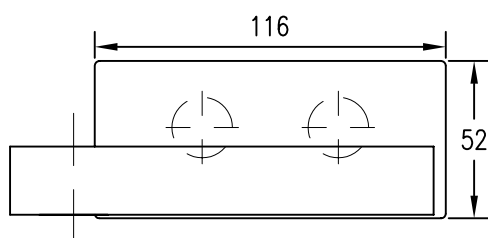

ELEVATION

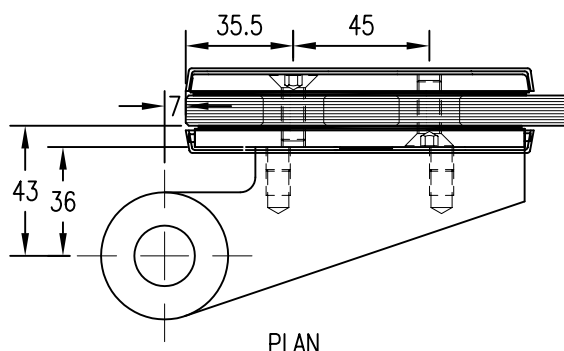


PLAN

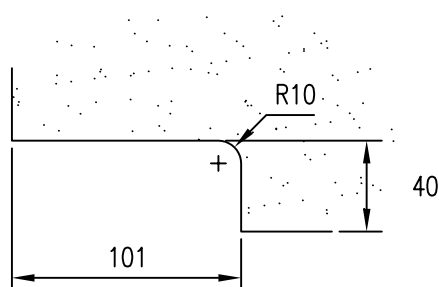


326.1 GLASS PREPARATION

327.1


OVERPANEL/SIDELIGHT OFFSET PATCH FITTING

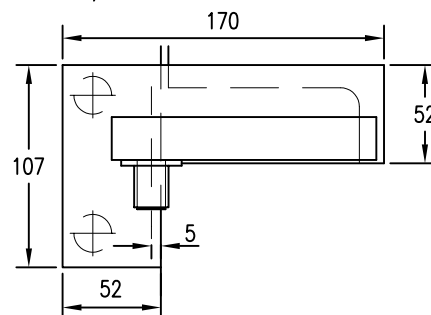

ELEVATION

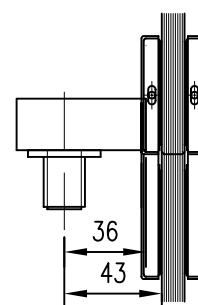

END VIEW

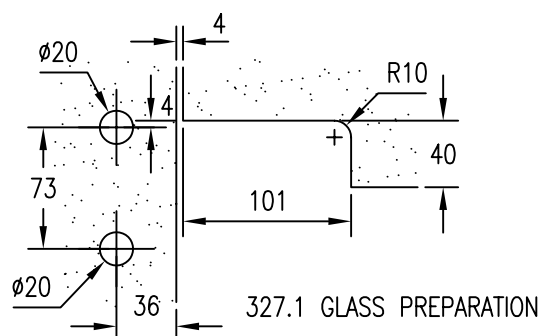

327.1 GLASS PREPARATION



326.1 & 327.1 SPECIFICATION: Universal 326.1 Overpanel and 327.1 Overpanel / Sidelight Offset Patch Fitting to suit DORMA 312.1 Upper Offset Patch Fitting.
Specify Glass Thickness 10, or 12mm.
SPECIFY: Handing LH / RH (LEFT HAND DRAWN)
MAX DOOR WEIGHT: 90kg's
MAX DOOR WIDTH: 1000mm

FINISHES:



ALUMINIUM

SAA



339.1

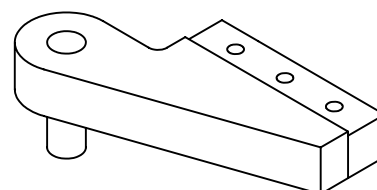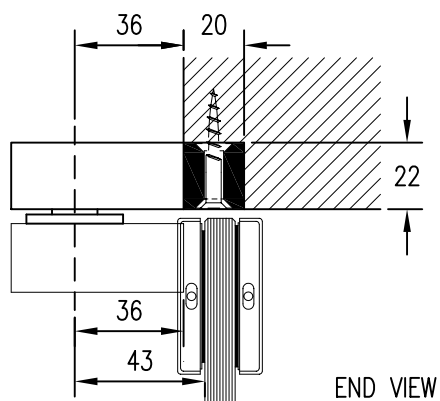

339.2

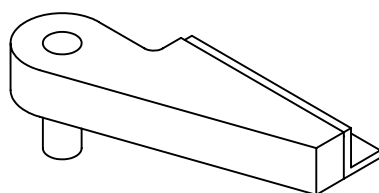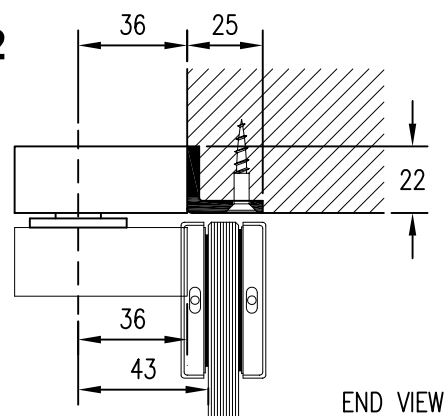

339.3

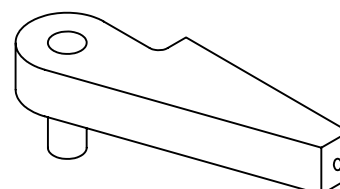
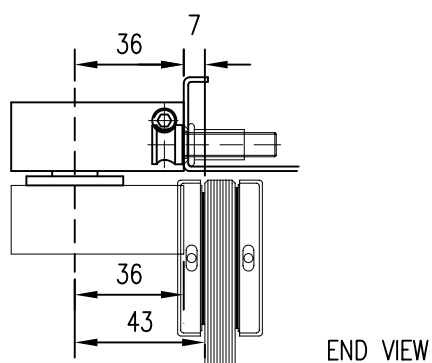


339.1, 339.2, 339.3 SPECIFICATION: Universal 339.1, .2, .3 Upper Offset Frame Portions to suit DORMA 312.1 Upper Offset Patch Fitting.
SPECIFY: Handing LH / RH (LEFT HAND DRAWIN)
MAX DOOR WEIGHT: 90kg's
MAX DOOR WIDTH: 1000mm


FINISHES:

ALUMINIUM


SAA

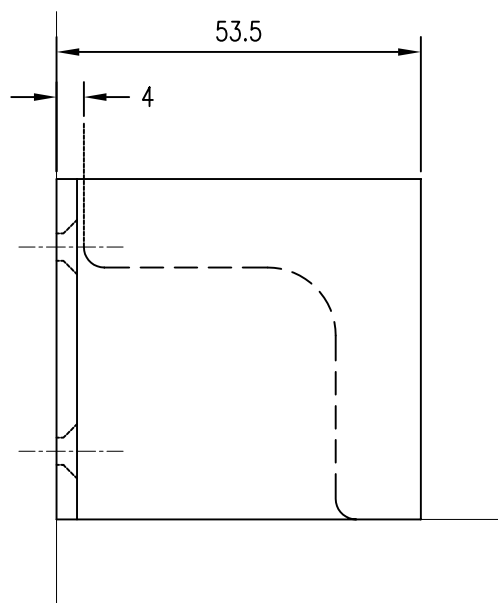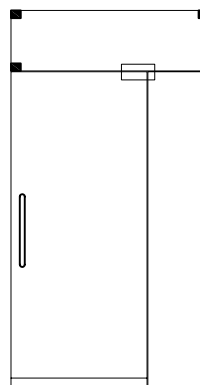


ELEVATION

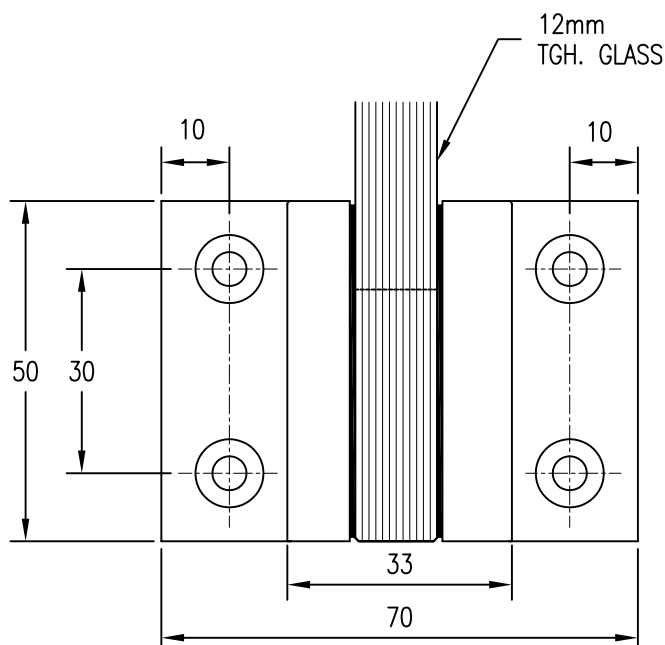

END VIEW

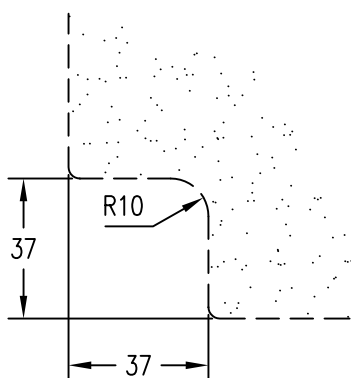

GLASS PREPARATION


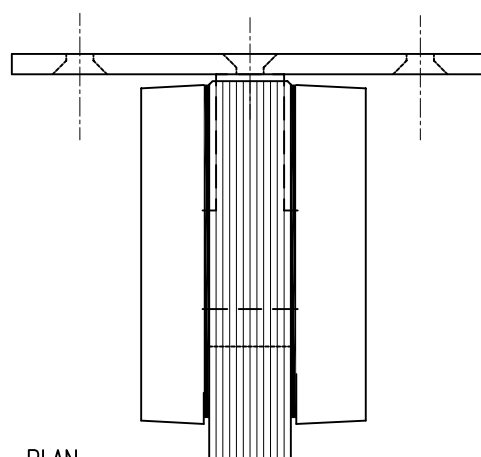


PLAN


CD71 SPECIFICATION: ON-EAZI 50mm x 50mm High Light Corner Patch with Back Plate for Wall Fixing.
Specify Glass Thickness 10, 12 or 15mm.
SPECIFY: CD71 High Light Corner Patch
SPECIFY: CD71S High Light Corner Stop Patch

FINISHES:


ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

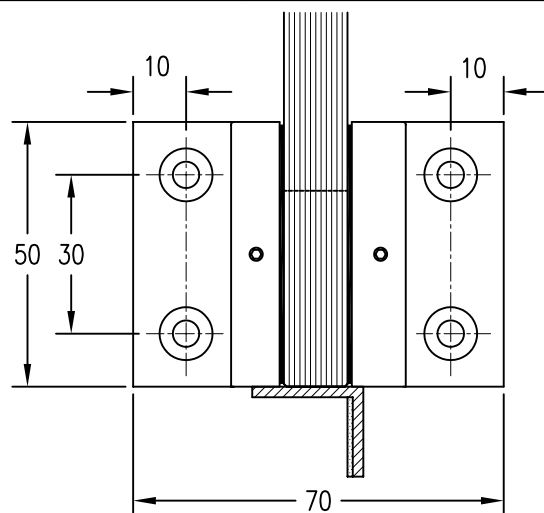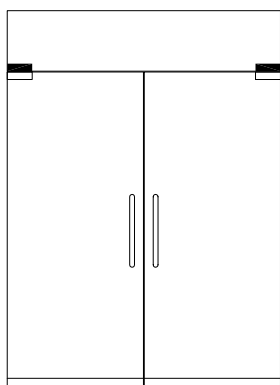


CD72S STOP PATCH

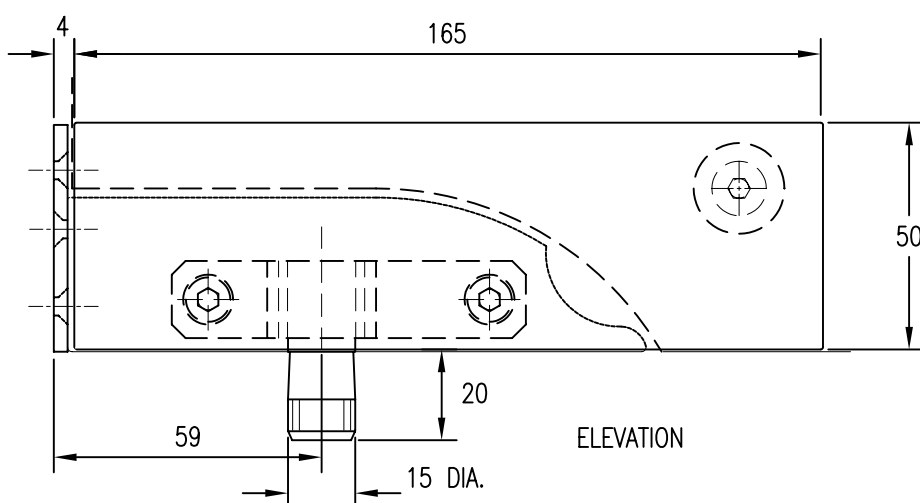

ELEVATION

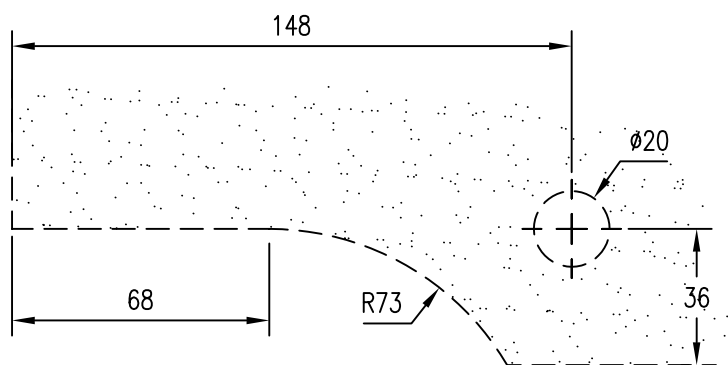

GLASS PREPARATION

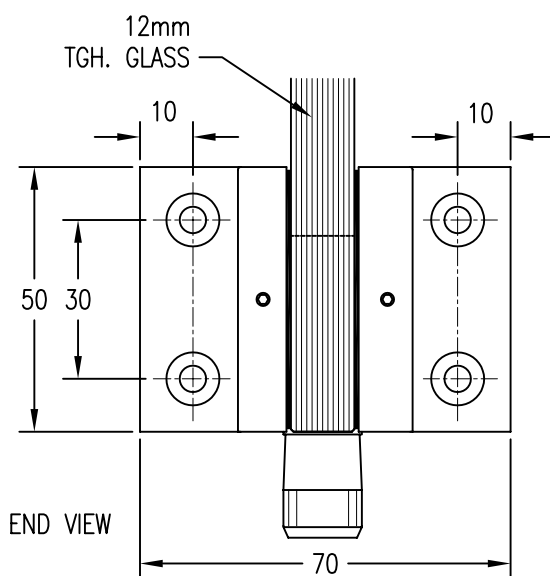

END VIEW

CD72 SPECIFICATION: ON-EAZI 50mm x 165mm High Light Corner Patch with Back Plate for Wall Fixing fitted with CD 72.1 Adaptor set at 55mm to suit CD 52 Top Patch.





Specify Glass Thickness 10, 12 or 15mm.

SPECIFY: CD72 High Light Corner Pivot Patch


SPECIFY: CD72S High Light Corner Stop Patch

FINISHES:

ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

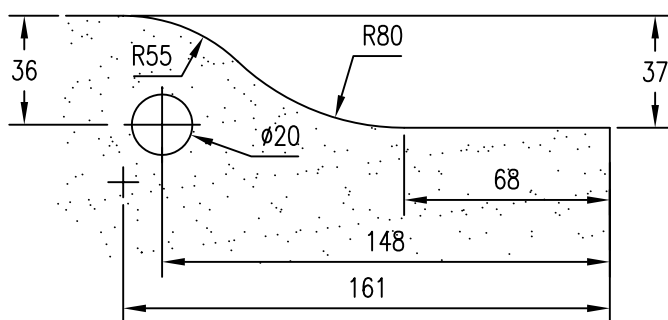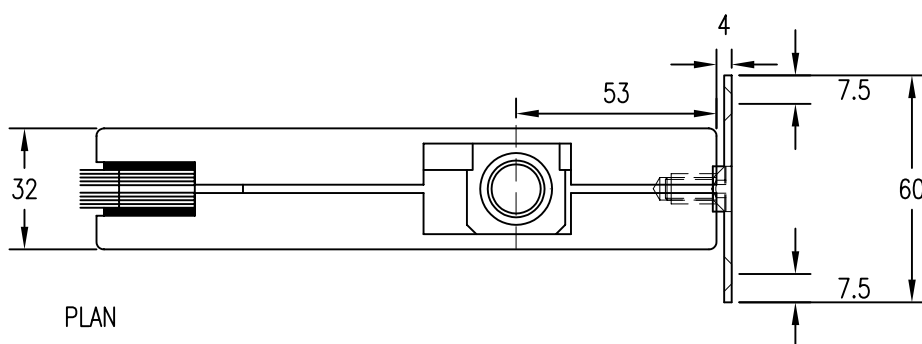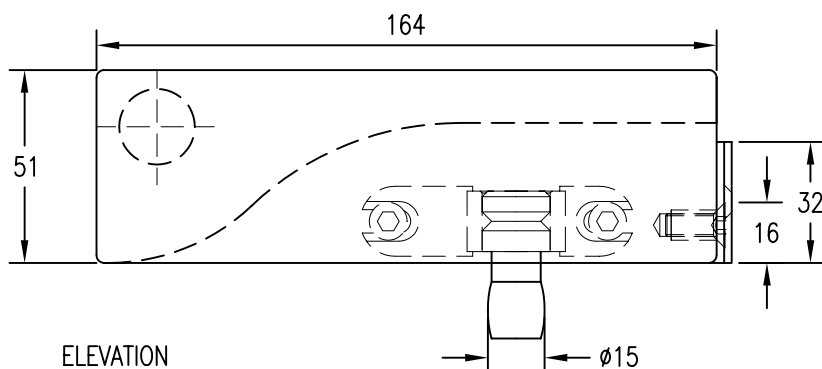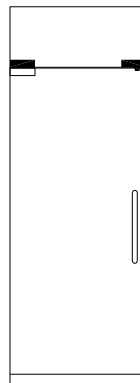

GLASS PREPARATION



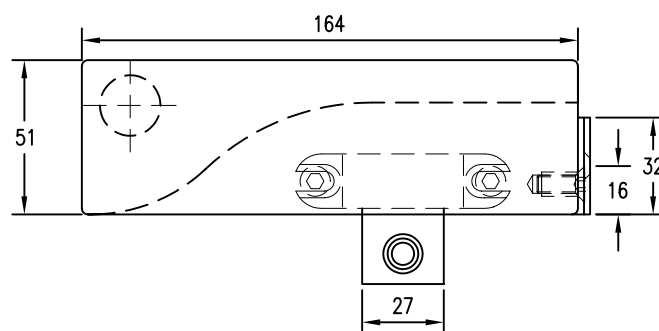


PT30S STOP PATCH


PT30 & 30S SPECIFICATION: Universal 51mm x 164mm PT30 Overpanel Patch Fitting with Backing Plate and Pivot to suit DORMA PT20 Upper Patch Fitting, and PT30S Overpanel Patch Fitting with Backing Plate and Stop Insert.
Specify Glass Thickness 10, 12 or 15mm.

FINISHES:


ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

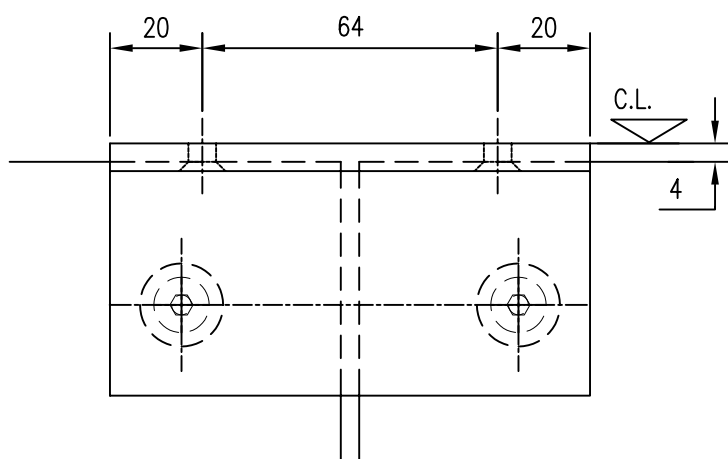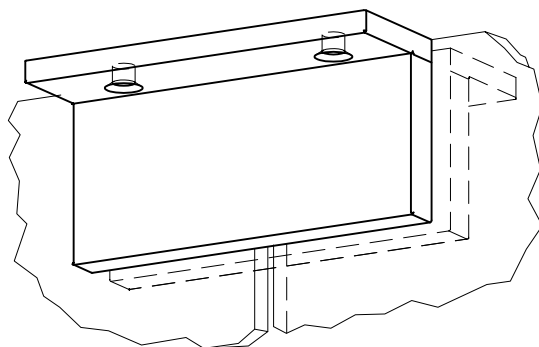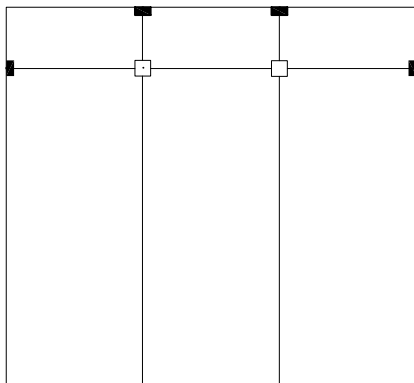

ELEVATION

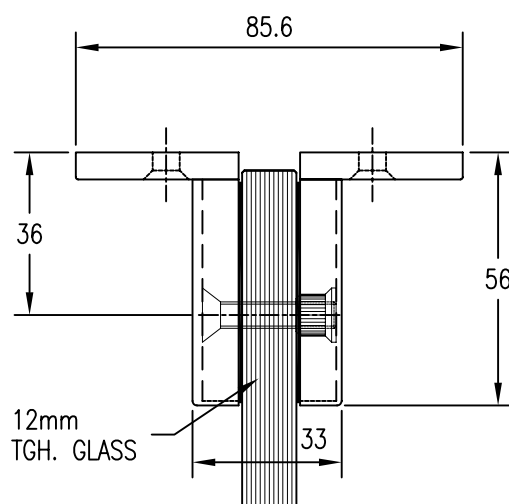

SECTION




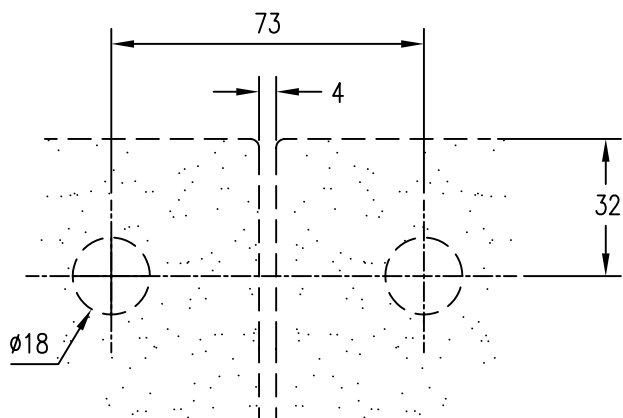


GLASS PREPARATION

CD76 SPECIFICATION: ON-EAZI 56mm x 104mm High Light or Side Light
2 panel Link Patch with Wall Fixing.
Specify Glass Thickness 10, 12 or 15mm.
Note: Can be used as non structural fin bracket.
Optional Covers for Legs available on request.

FINISHES:



ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

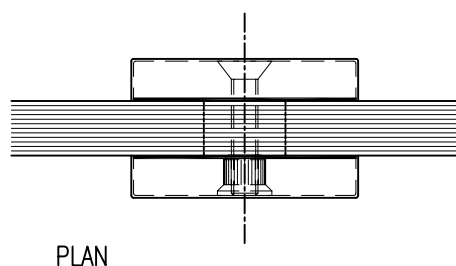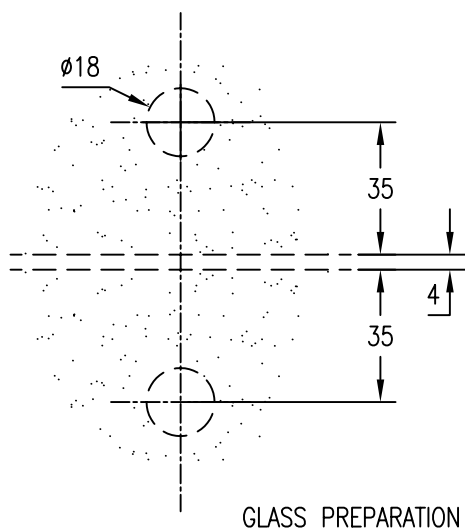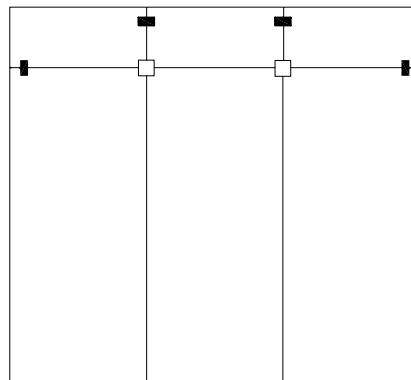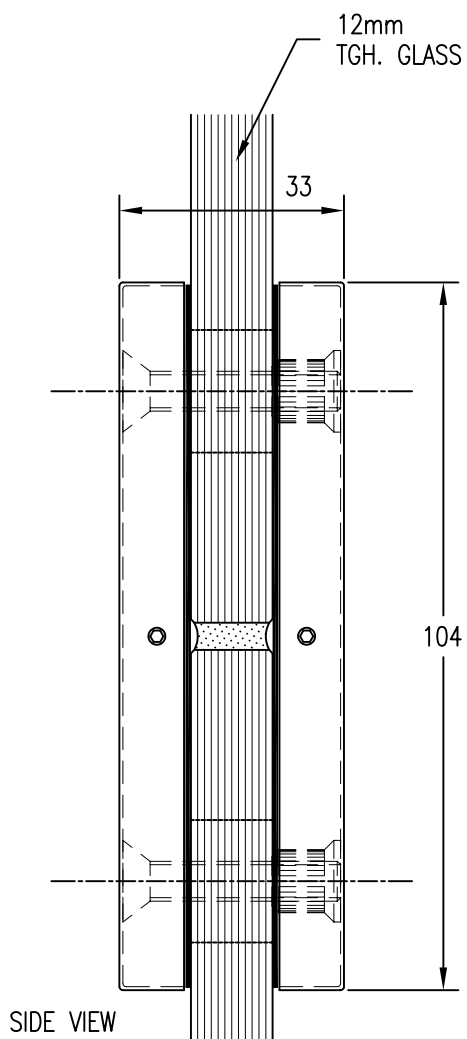


CD78 SPECIFICATION: ON-EAZI 50mm x 104mm High Light or Side Light Link Patch for connecting two panels of glass.
Specify Glass Thickness 10, 12 or 15mm.

FINISHES:


ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

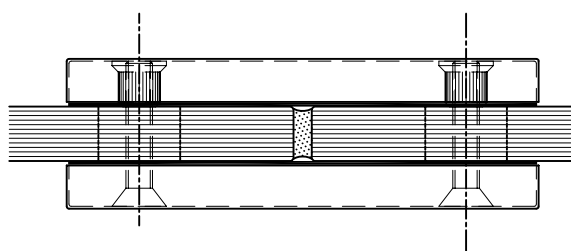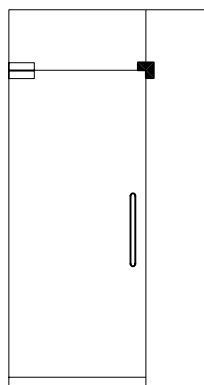


PLAN

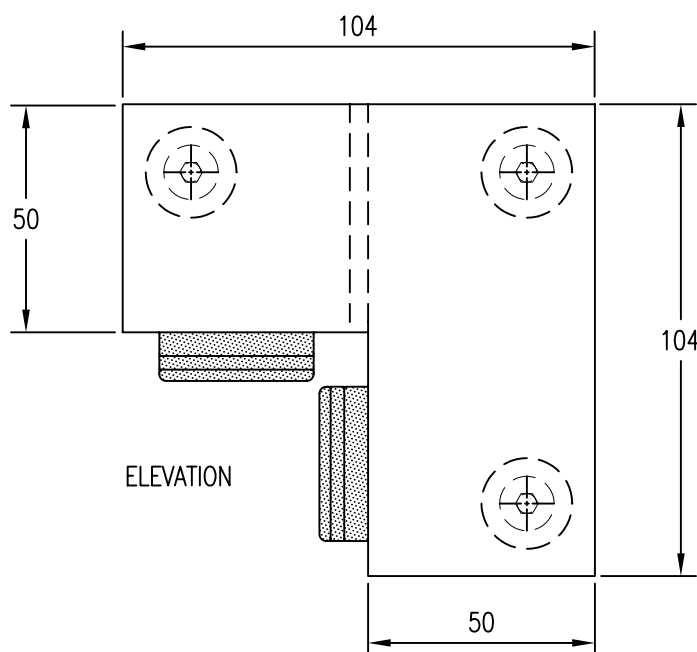

ELEVATION

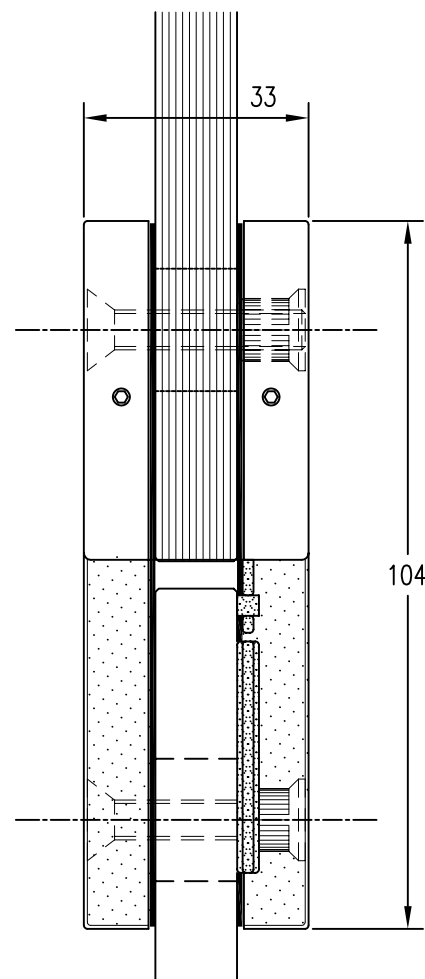

END VIEW

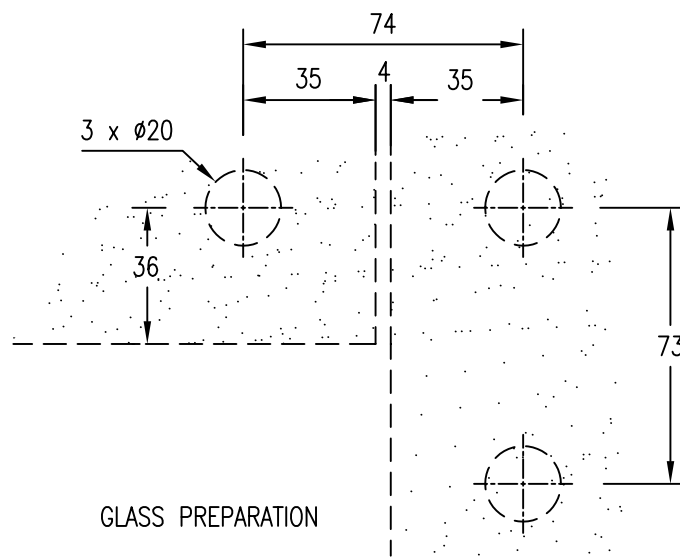


GLASS PREPARATION



CD82 SPECIFICATION: ON-EAZI 104mm x 104mm High Light to Side Light corner Link Patch with Door Stop Insert fitted.
Specify Glass Thickness 10, 12 or 15mm.
SPECIFY CD81 if no Stop Insert is required.

FINISHES:


ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

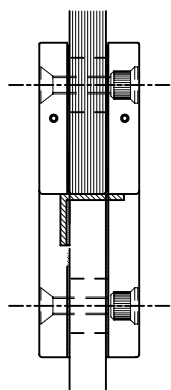



CD83S STOP PATCH

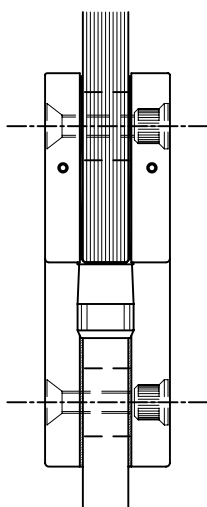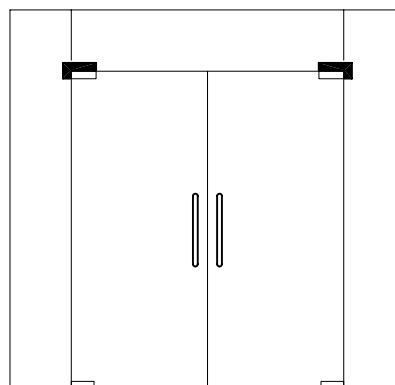

END VIEW

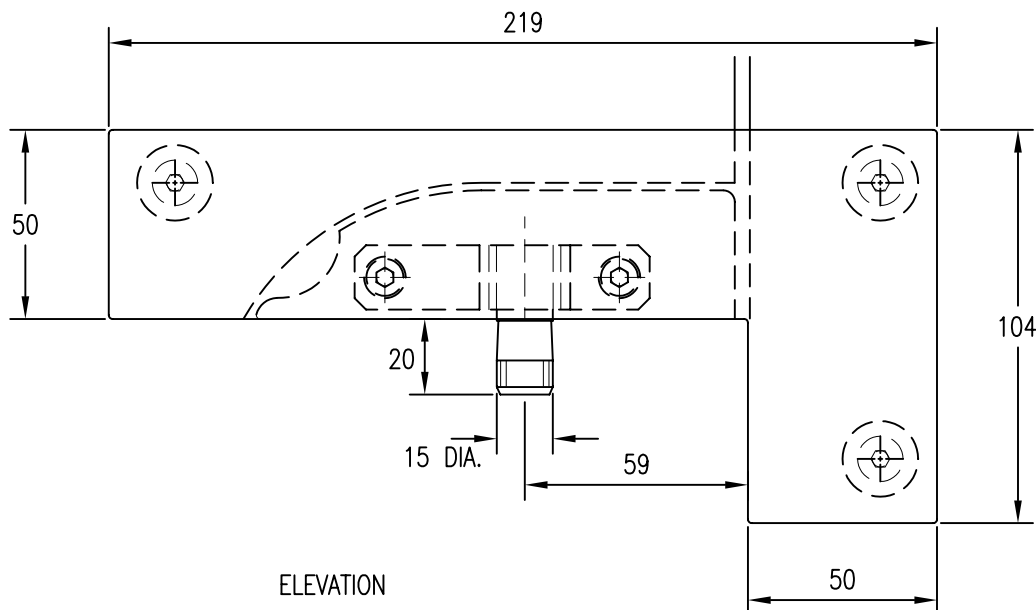

ELEVATION

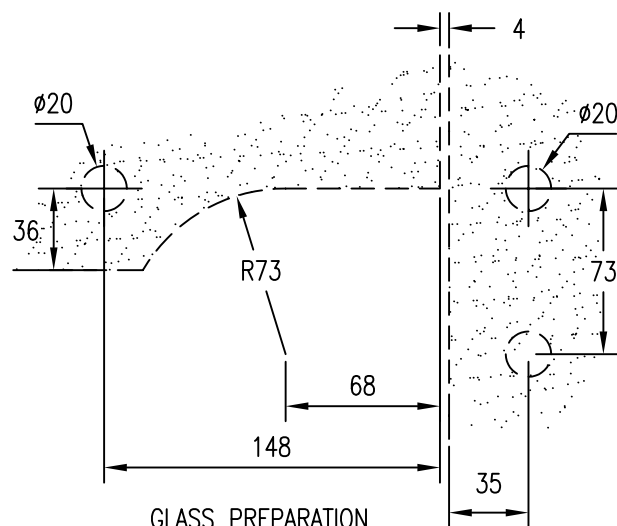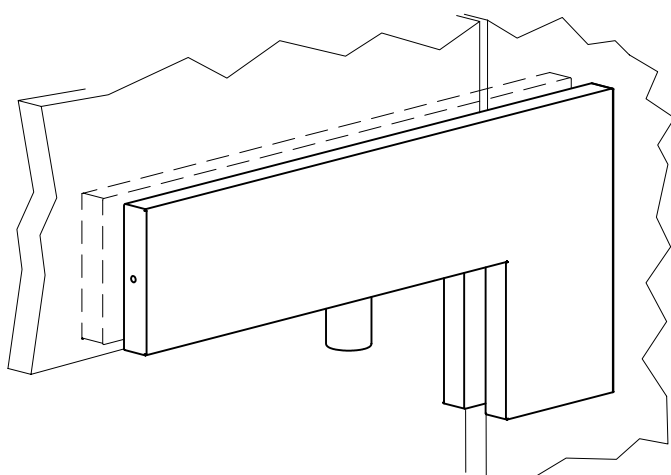

GLASS PREPARATION




CD83 SPECIFICATION: ON-EAZI 104mm x 219mm High Light to Side Light corner Link Patch fitted with CD72.1 Adaptor set at 55mm to suit CD52 Top Patch.

Specify Glass Thickness 10, 12 or 15mm.


ALSO AVAILABLE: CD83S High Light to Side Light Stop Patch.

FINISHES:


ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

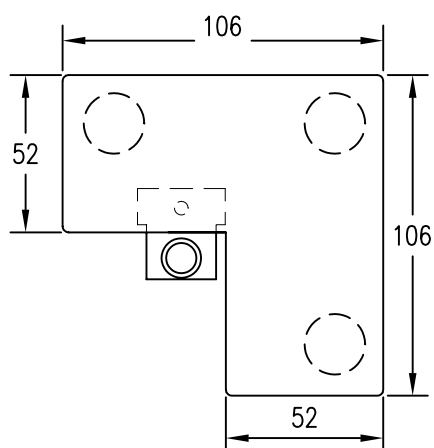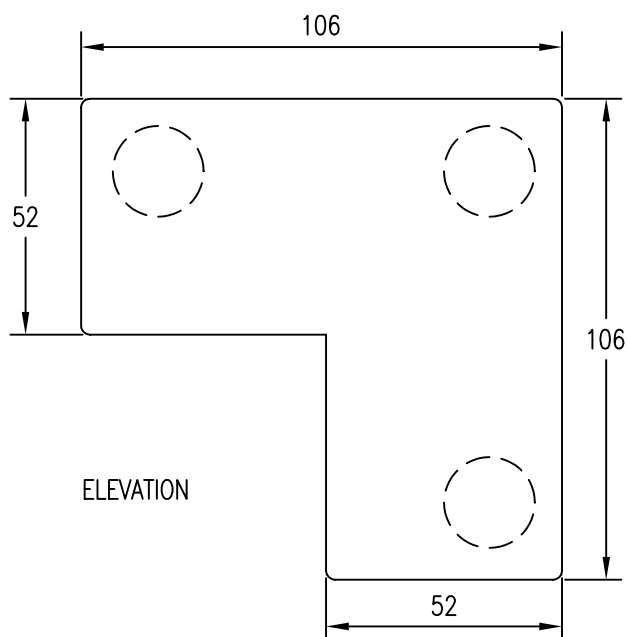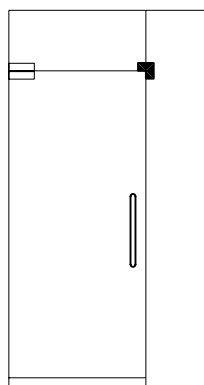

PT60S STOP PATCH

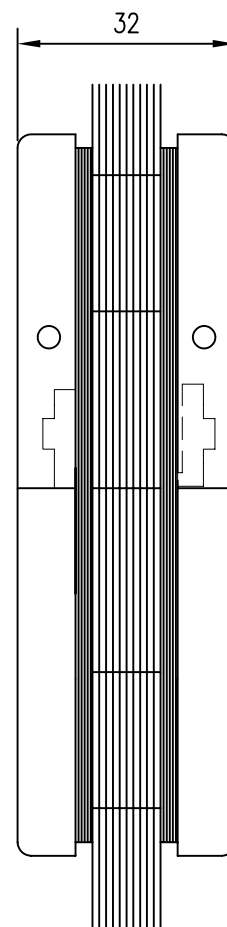

END VIEW

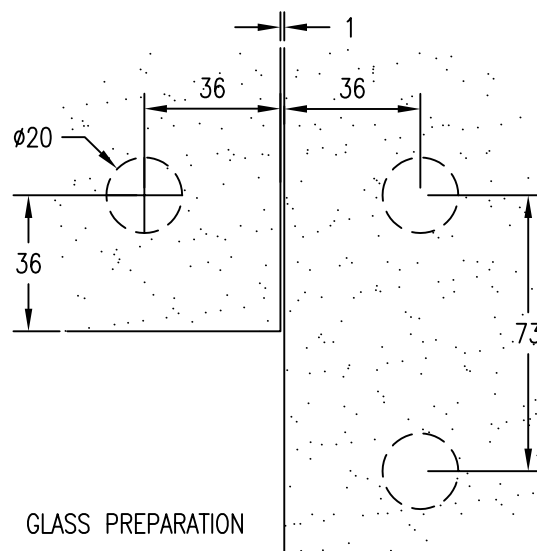

PT60 & PT60S SPECIFICATION: Universal 106mm x 106mm PT60 Highlight to Sidelight Corner Link Patch, and PT60S Highlight to Sidelight Corner Link Patch with Stop Insert.


Specify Glass Thickness 10, 12 or 15mm.

SPECIFY: CD60 Highlight to Sidelight Corner Link Patch



SPECIFY: CD60S Highlight to Sidelight Corner Stop Patch

FINISHES:


ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

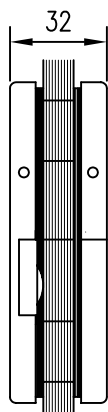



PT40S STOP PATCH

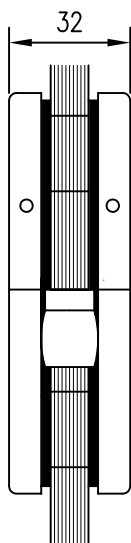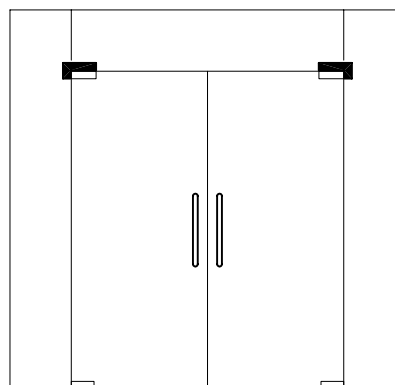

END VIEW

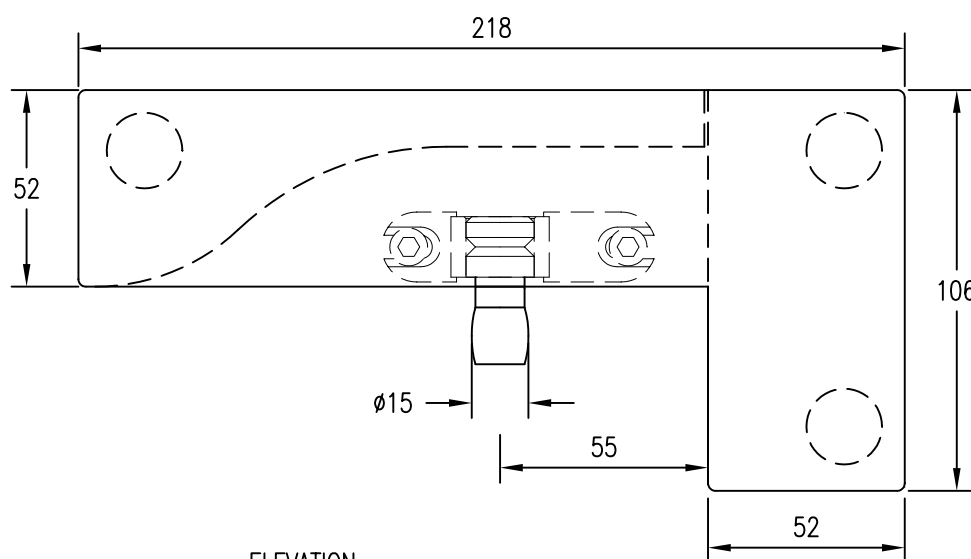

ELEVATION

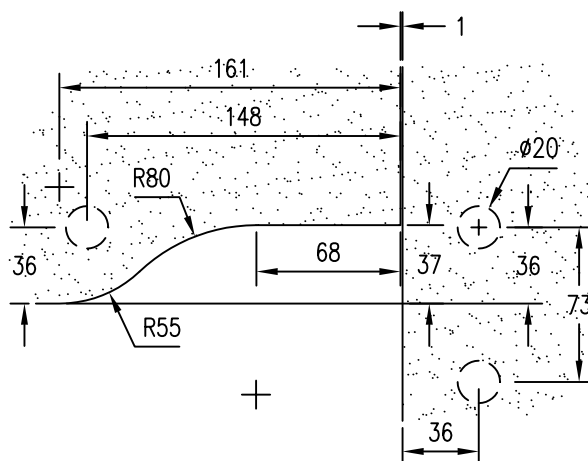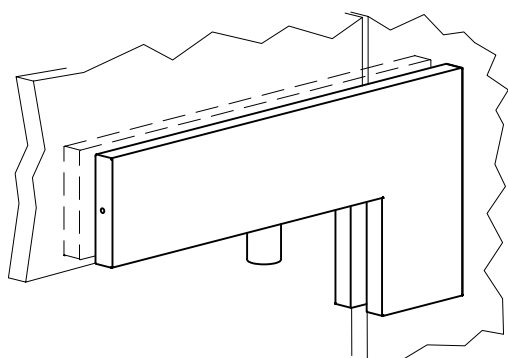


GLASS PREPARATION


PT40 & PT40S SPECIFICATION: Universal 218mm x 106mm PT40 Highlight to Sidelight Corner Link Patch with Pivot, and PT40S Highlight to Sidelight Corner Link Patch with Stop Insert.
Pivot Point Set at 55mm.
Specify Glass Thickness 10, 12 or 15mm.
SPECIFY: PT40 Highlight to Sidelight Corner Pivot Patch
SPECIFY: PT40S Highlight to Sidelight Corner Stop Patch

FINISHES:


ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

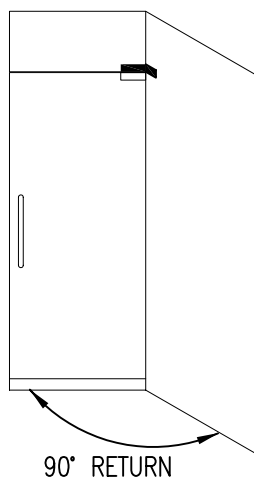


90° RETURN

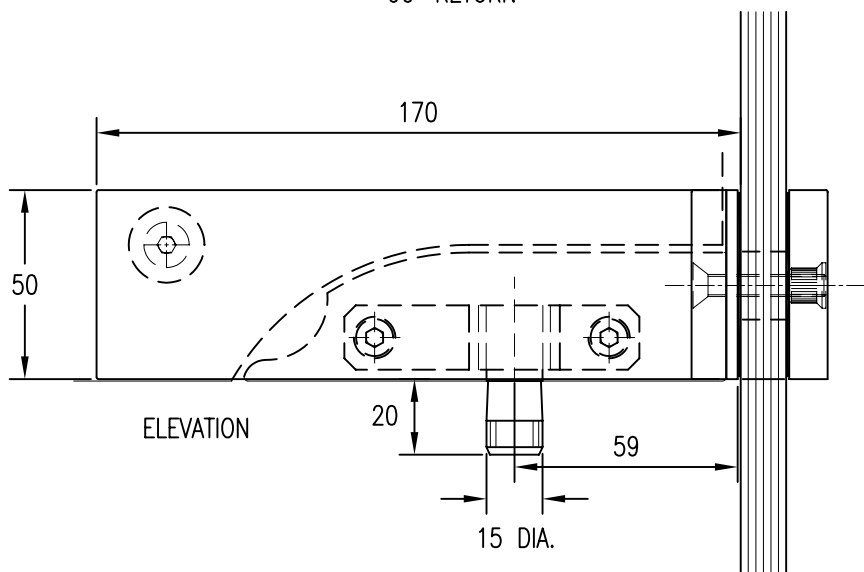


ELEVATION

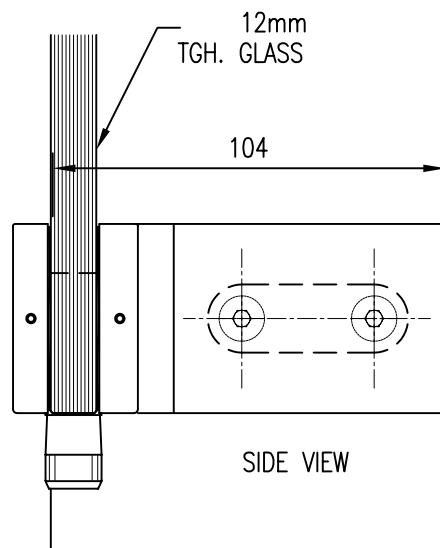

SIDE VIEW

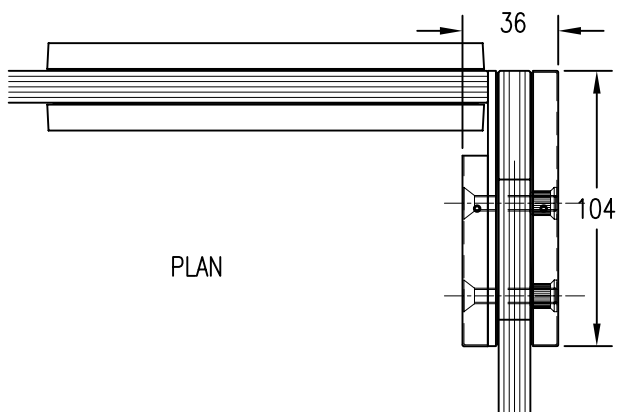

PLAN

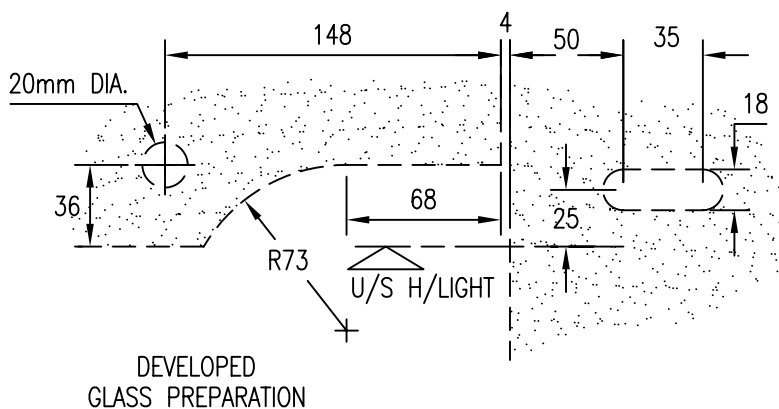

DEVELOPED
GLASS PREPARATION

CD83/90 SPECIFICATION: ON-EAZI 50mm x 192mm High Light to Side Light Corner Link Patch with a return at 90 degrees, fitted with CD72.1 Adaptor set at 55mm to suit CD52 Top Patch.
Specify Glass Thickness 10, 12 or 15mm.
Specify Handing LH / RH
Specify CD72.1S Stop Insert if required.
ILLUSTRATED: CD83/90 RH

FINISHES:

ALUMINIUM

BRASS

STAINLESS

MILL

PBU

SSS

SAA






CP

PSS

S/F

SCP

P/S/F

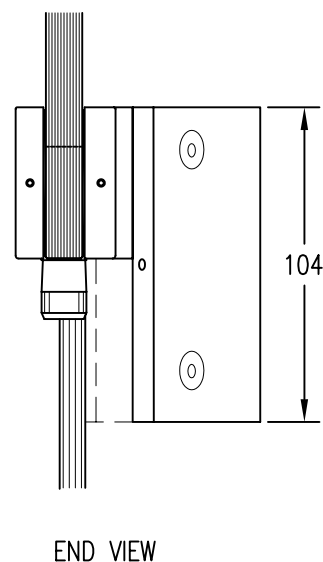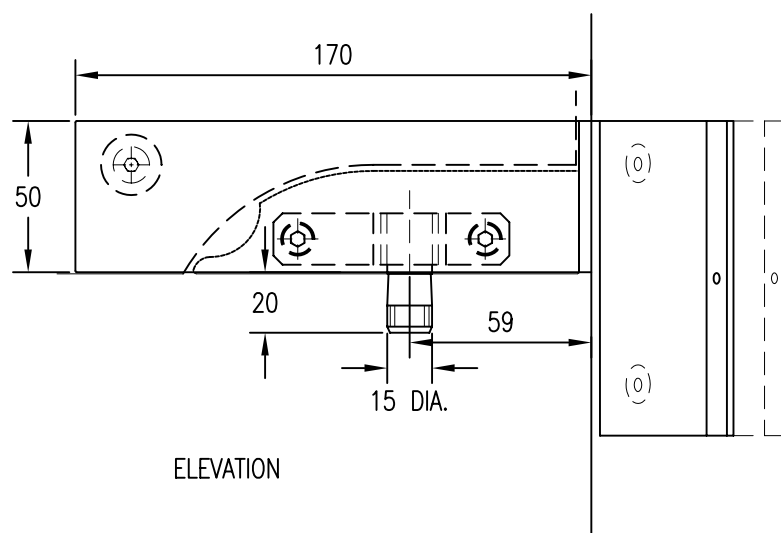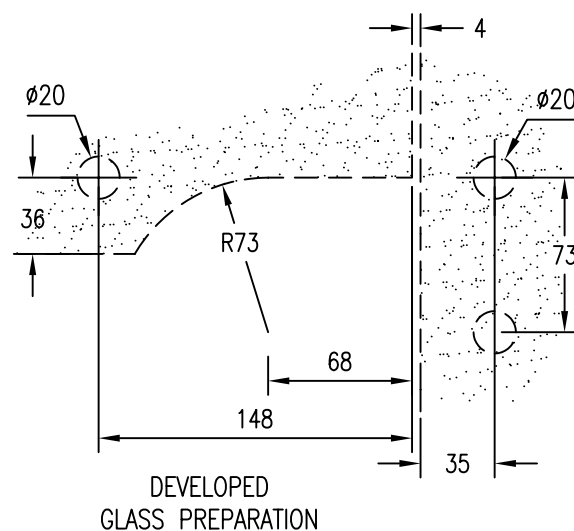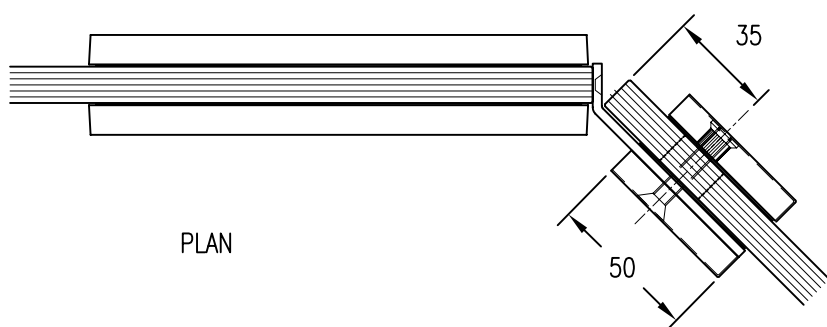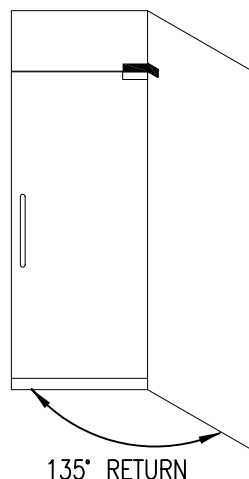

CD83/135 SPECIFICATION: ON-EAZI 104mm x 192mm x 50mm
High Light to Side Light Corner Link Patch with a return at 135 degrees,
fitted with CD72.1 Adaptor set at 55mm to suit CD52 Top Patch.

Specify Handing LH / RH

Specify glass thickness 10,12 or 15mm.






Specify CD72.1S Stop Insert if required.

ILLUSTRATED: CD83/135 RH

NOTE: Manufactured to suit all angles of return, specify angle required.

FINISHES:



ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

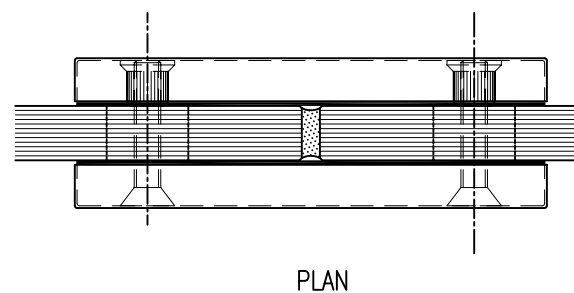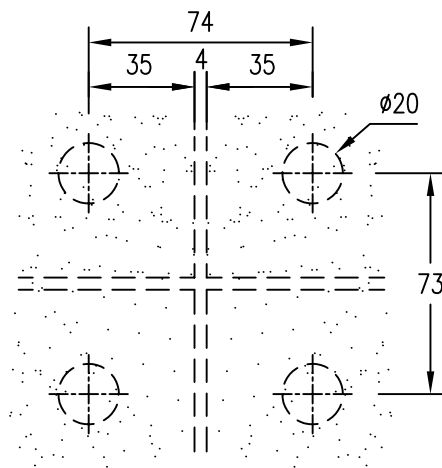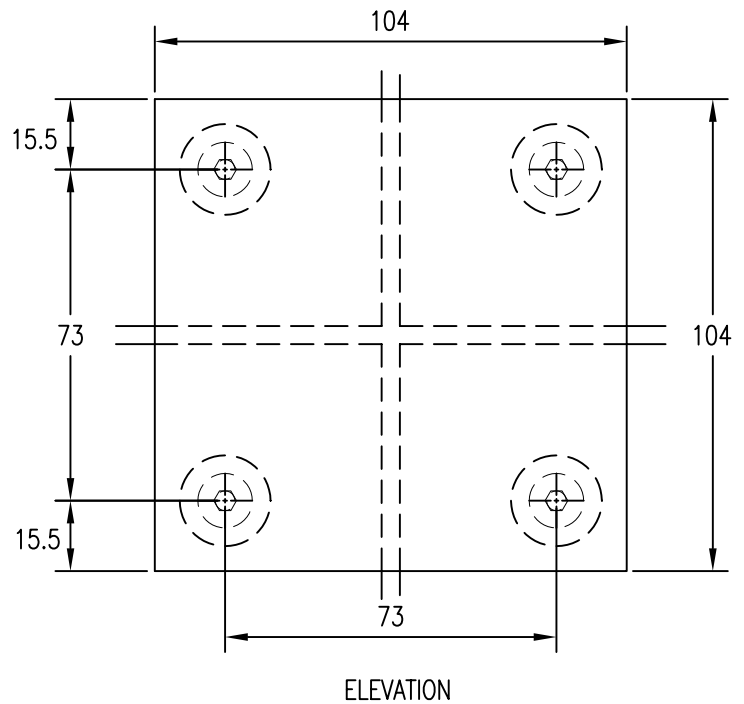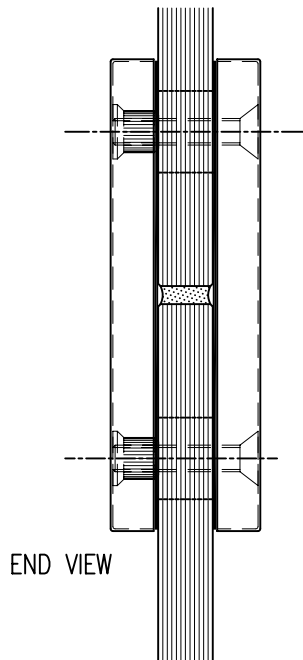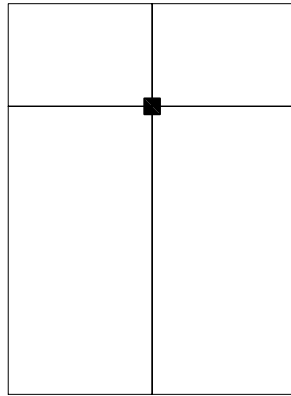


CD86 SPECIFICATION: ON-EAZI 104mm x 104mm Four Panel
Link Patch for Connecting Two or Four Panels of Glass.
Specify Glass Thickness 10, 12 or 15mm.

FINISHES:


ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

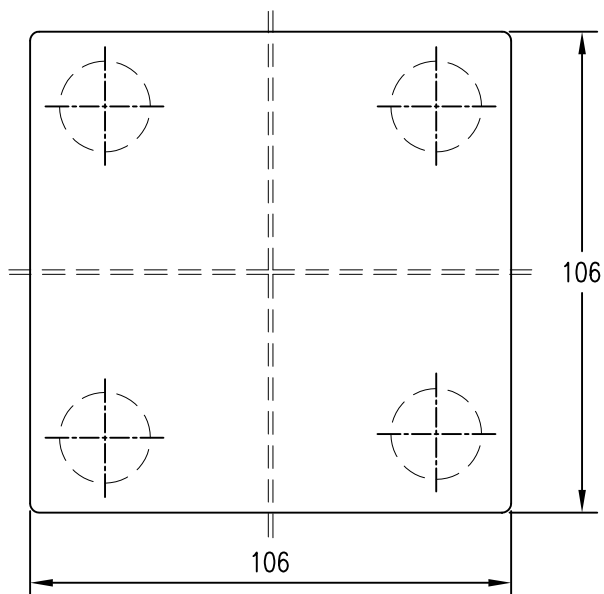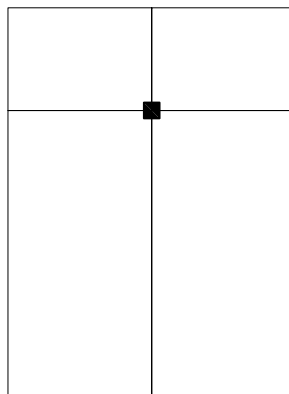


ELEVATION

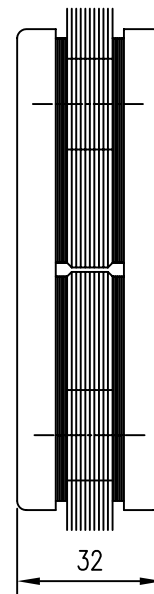

END VIEW

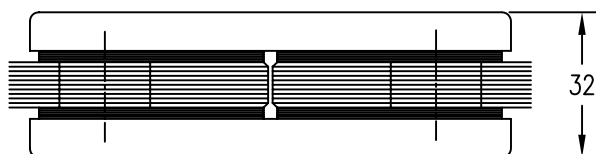

PLAN


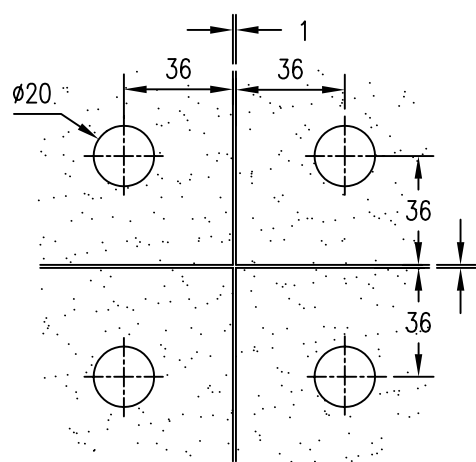


GLASS PREPARATION


PT80 SPECIFICATION: Universal 106mm x 106mm PT80 Connecting Link Patch for Connecting Two or Four Panels of Glass.
Specify Glass Thickness 10, 12 or 15mm.

FINISHES:


ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

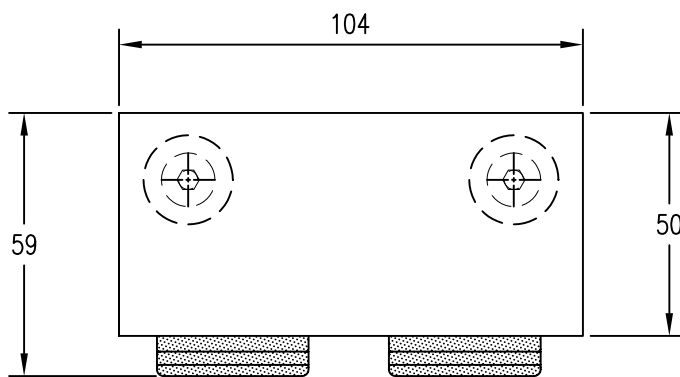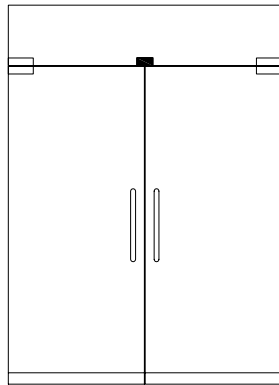

ELEVATION

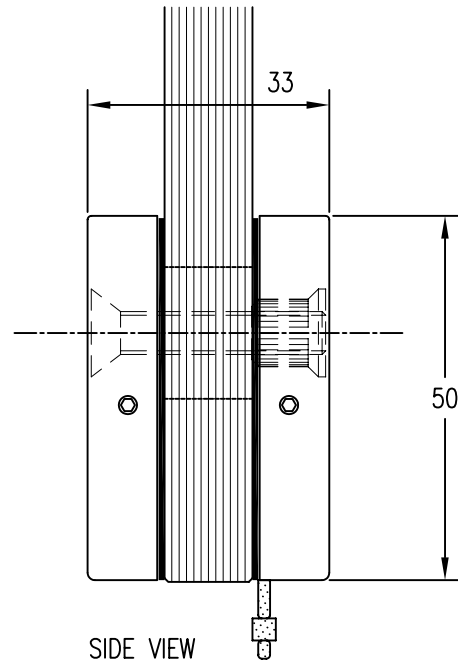

SIDE VIEW

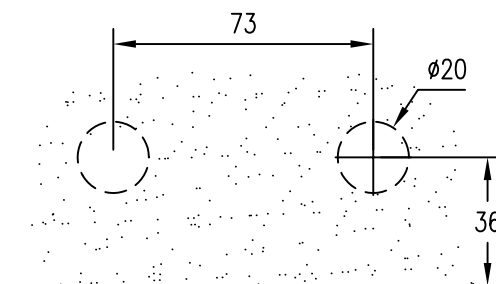


GLASS PREPARATION



CD87 SPECIFICATION: ON-EAZI 50mm x 104mm
High Light Stop Patch.
Specify Glass Thickness 10, 12 or 15mm.

FINISHES:


ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

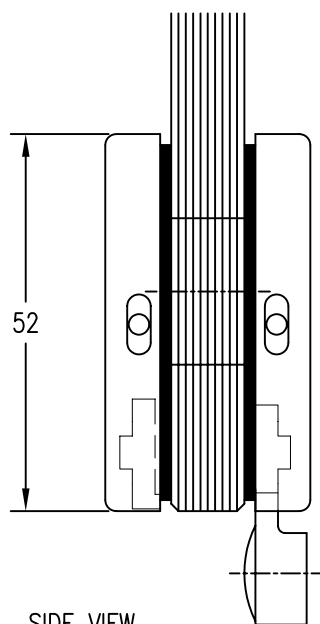

SIDE VIEW

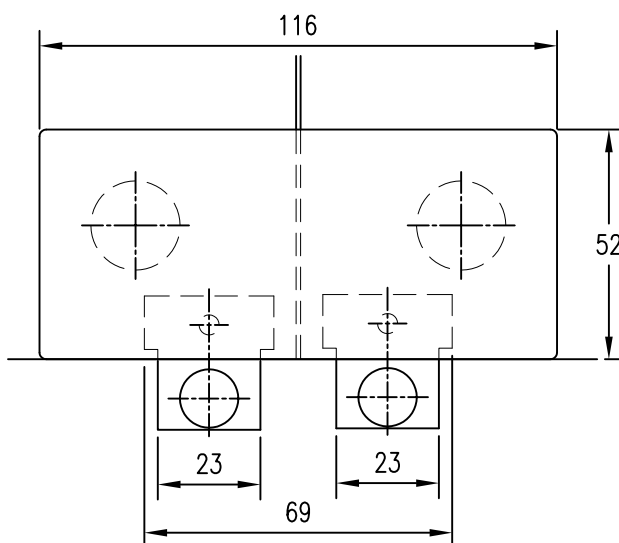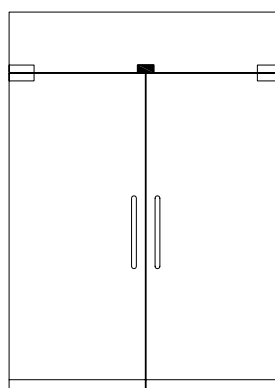

ELEVATION


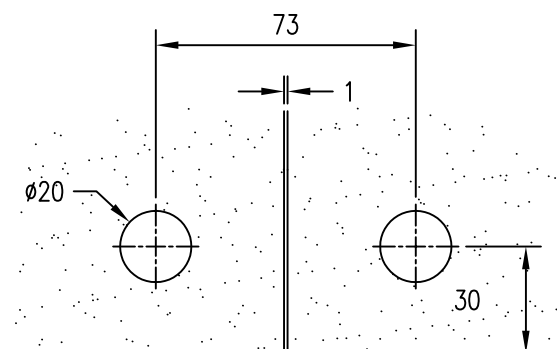


GLASS PREPARATION


PT70 & PT70S SPECIFICATION: Universal 116mm x 52mm PT70 Overpanel Connecting Patch for connecting 2 panels of glass, and PT70S Overpanel Connecting Patch with 2 x Stop Inserts. Specify Glass Thickness 10, 12 or 15mm.
NOTE: PT70S ILLUSTRATED

FINISHES:

ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

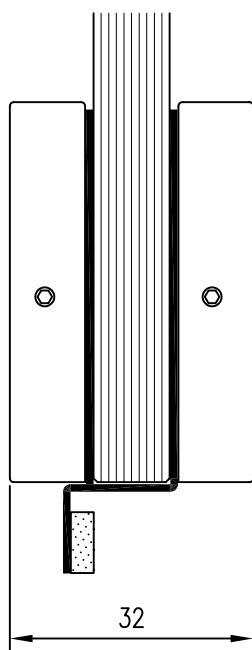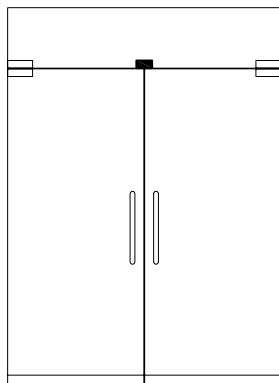

SIDE VIEW




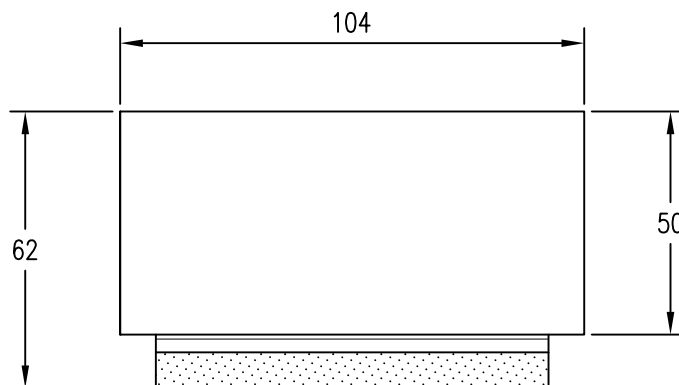


ELEVATION


CD87S/O SPECIFICATION: ON-EAZI 50mm x 104mm High Light
Slide Over Stop Patch for retro fitting where High Light is installed
without hole preparation.
Specify Glass Thickness 10, 12 or 15mm.
Note: Patch to be adhered to glass with silicone.

FINISHES:

ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

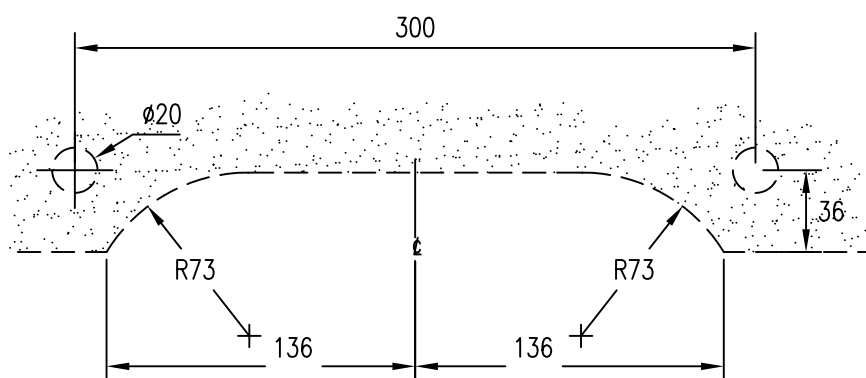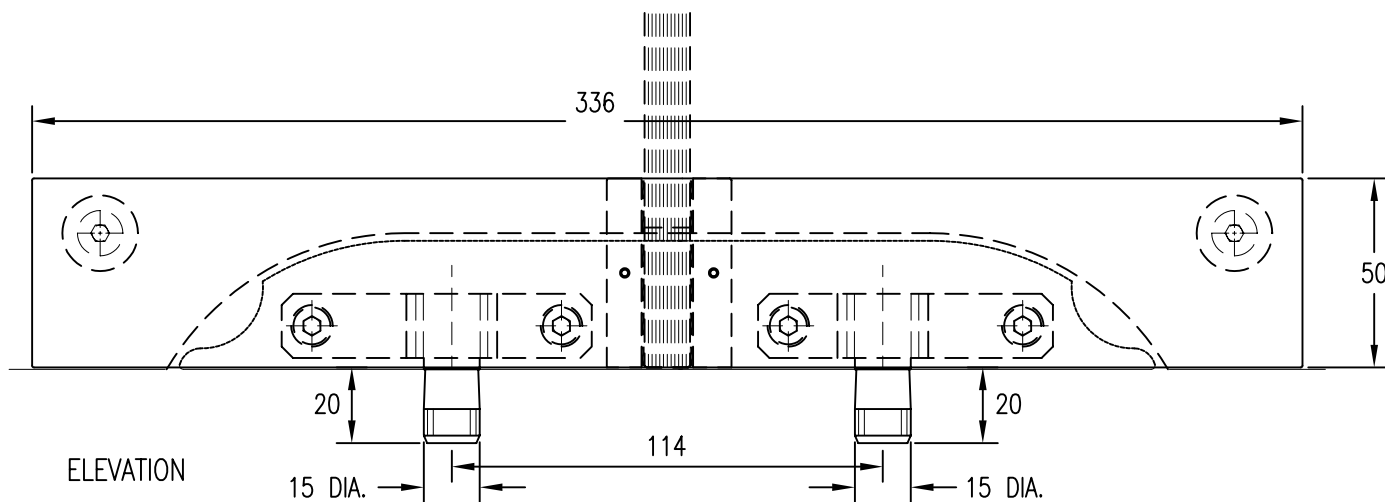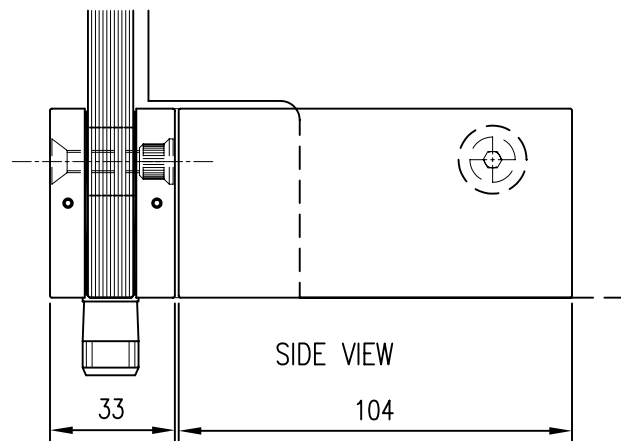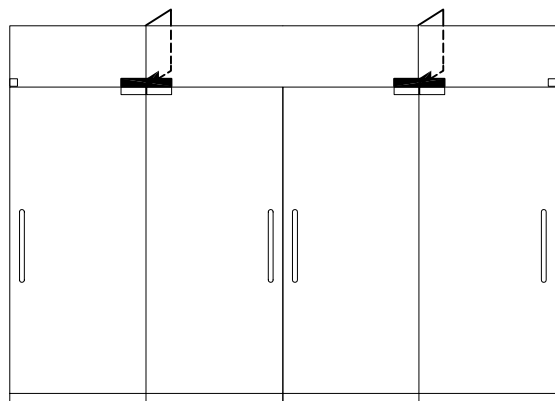

GLASS PREPARATION


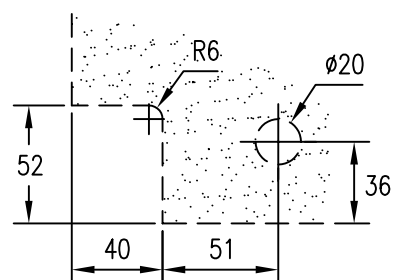


FIN GLASS PREPARATION


CD90 SPECIFICATION: ON-EAZI 50mm x 336mm High Light Twin Pivot Patch Fitting with Fin Portion fitted, to suit 2 x CD52 Top Patches. Specify Glass Thickness 10, 12 or 15mm. Specify Fin glass thickness 12 or 15mm.

FINISHES:


ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

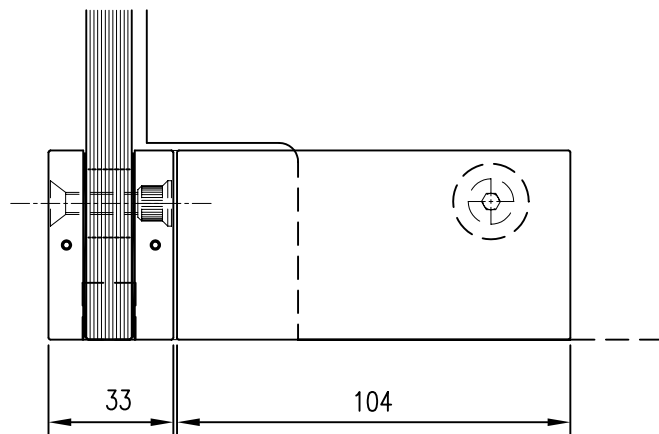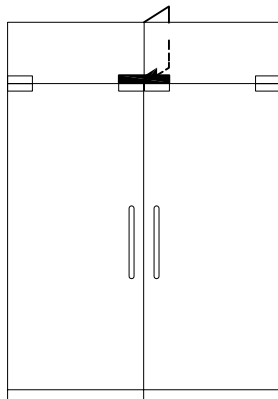


SIDE VIEW

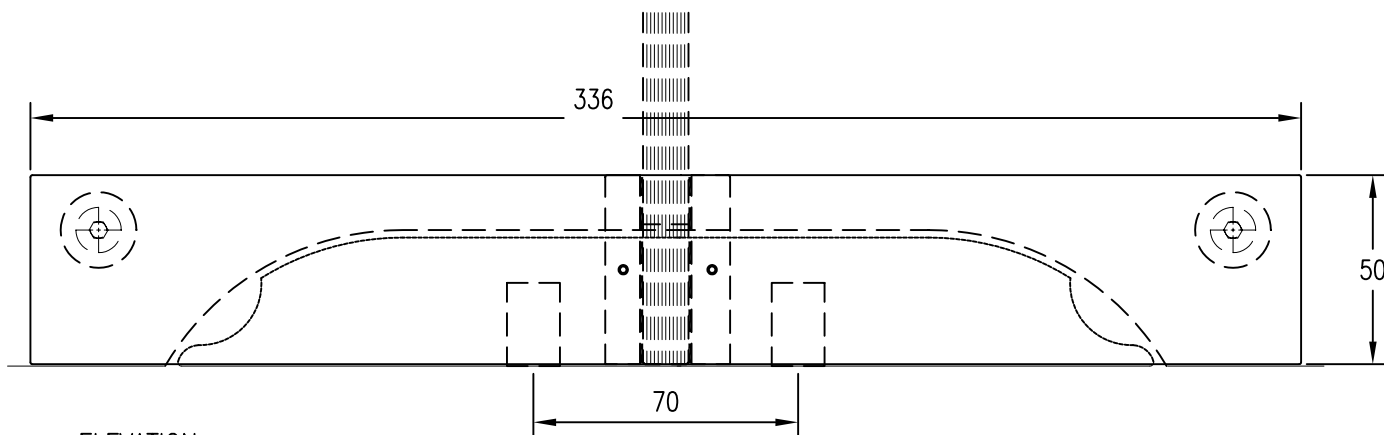

ELEVATION

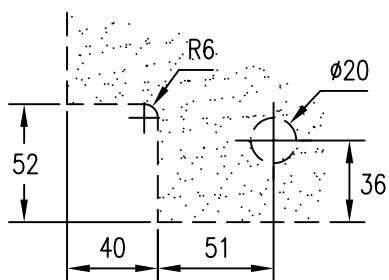

FIN GLASS PREPARATION

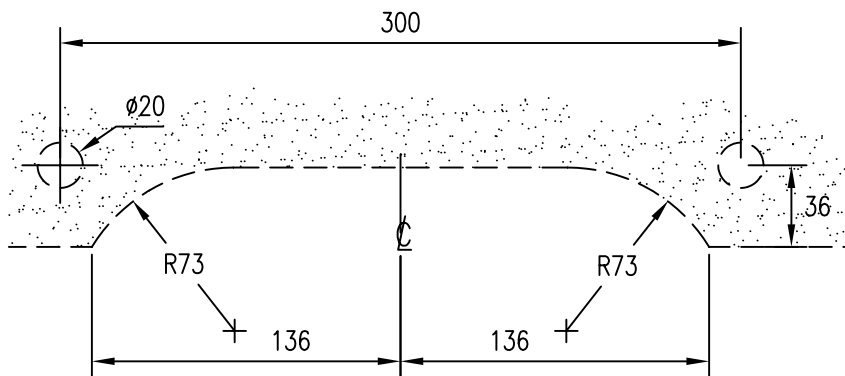

GLASS PREPARATION

CD90K SPECIFICATION: ON-EAZI 50mm x 336mm High Light Twin Keeper Patch Fitting with optional Fin Portion fitted, to suit 2 x CD53 Euro Top Patch Locks.


Specify Glass thickness 10, 12 or 15mm.

Specify if Glass Fin is required.


Specify Fin glass thickness 12 or 15mm.

FINISHES:


ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

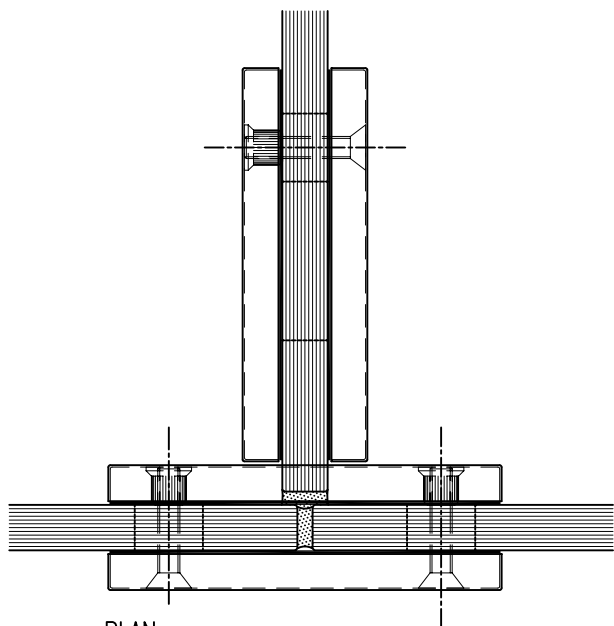


PLAN

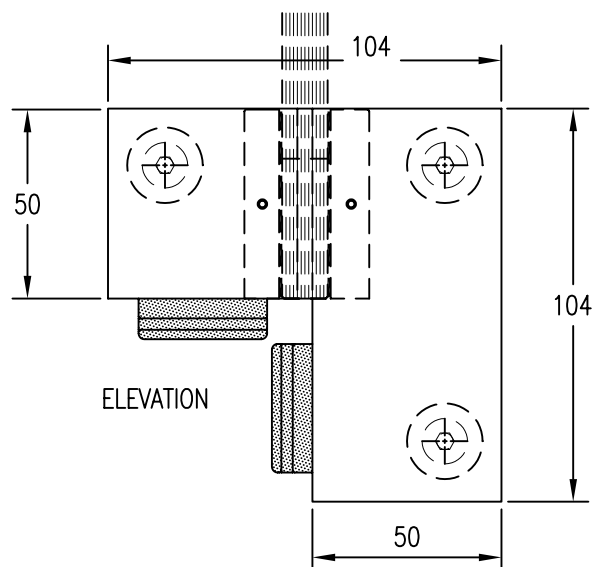


ELEVATION

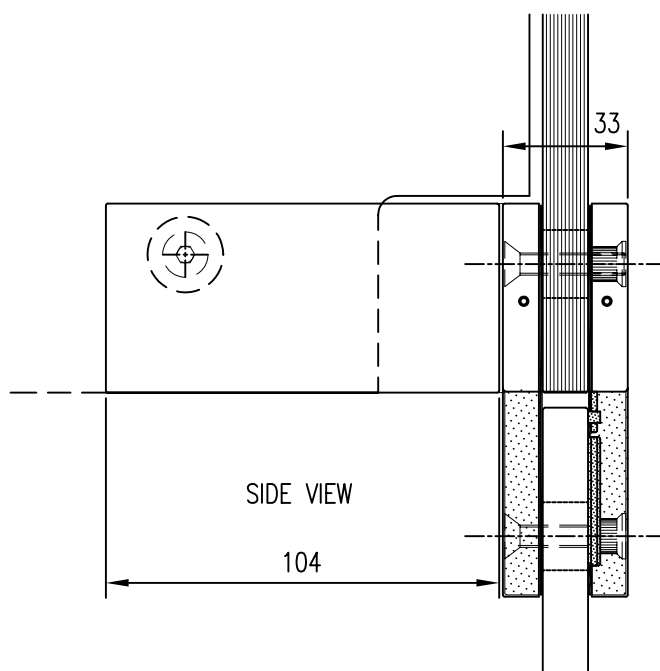

SIDE VIEW

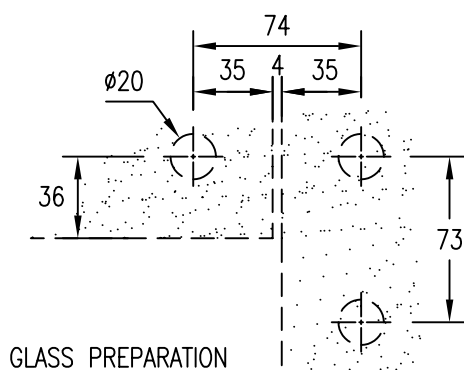

GLASS PREPARATION

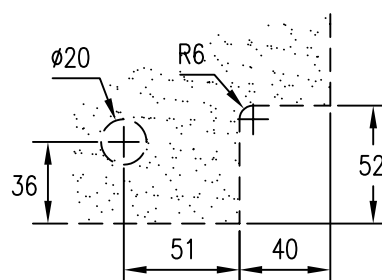


FIN GLASS PREPARATION



CD91R & CD92L SPECIFICATION: ON-EAZI 104mm x 104mm High Light to Side Light Corner Link Patch with Fin Portion and Stop Insert fitted. Specify glass thickness 10,12 or 15mm. Specify Fin glass thickness 12 or 15mm. ILLUSTRATED: CD91R

FINISHES:


ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

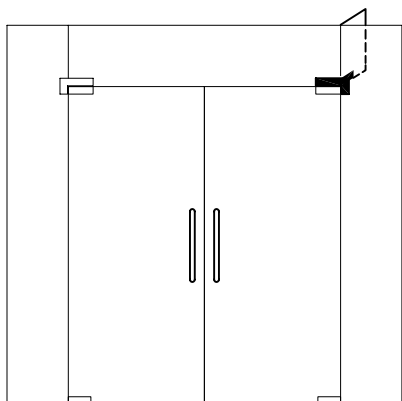


PLAN

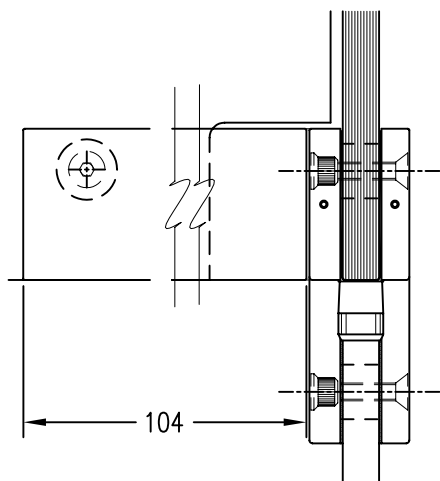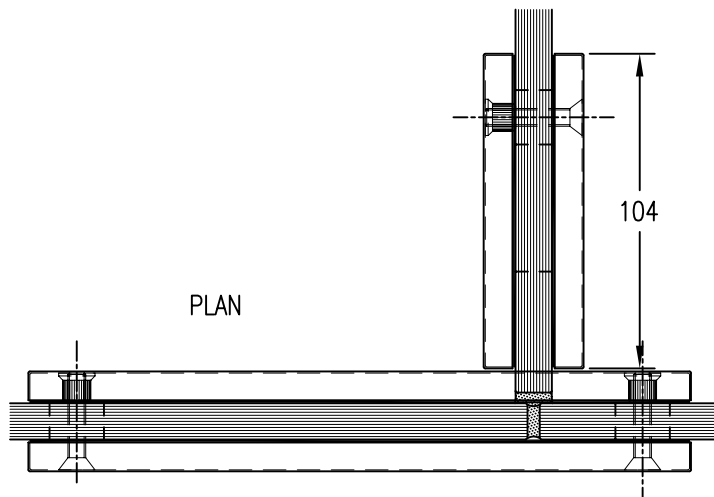


SIDE VIEW

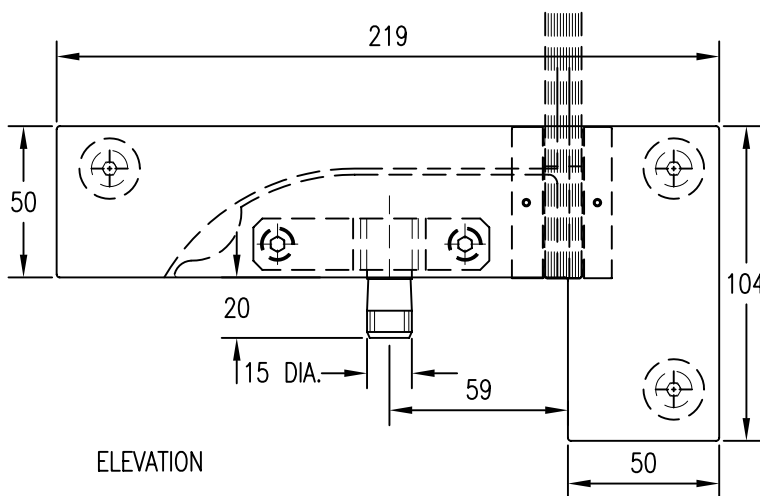

ELEVATION

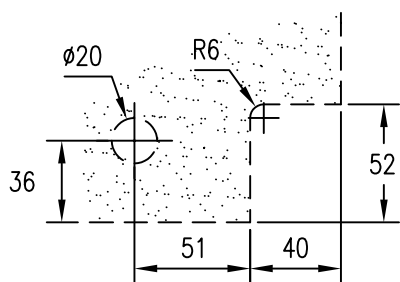

FIN GLASS PREPARATION

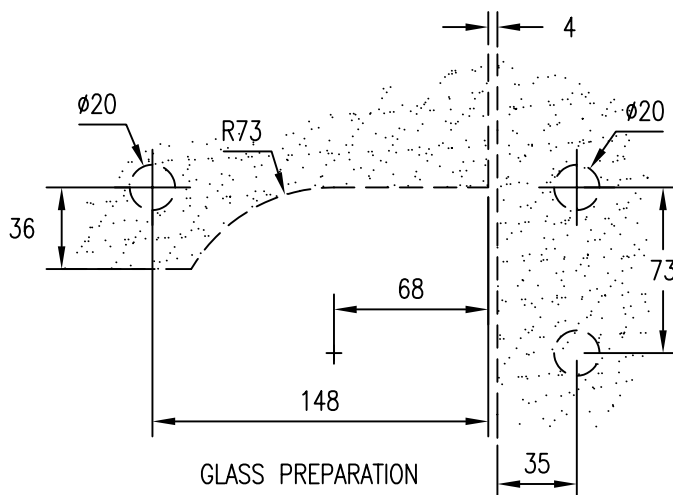

GLASS PREPARATION

CD93R & CD94L SPECIFICATION: ON-EAZI 104mm x 219mm High Light to Side Light Corner Link Patch with Fin Portion and CD72.1 Adaptor set at 55mm to suit CD52 Top Patch.
Specify glass thickness 10,12 or 15mm.
Specify Fin glass thickness 12 or 15mm.
Specify CD72.1S Stop Insert if required.
NOTE: CD93R ILLUSTRATED

FINISHES:

ALUMINIUM

BRASS

STAINLESS

MILL

PBU

SSS

SAA



CP

PSS


S/F

SCP


P/S/F

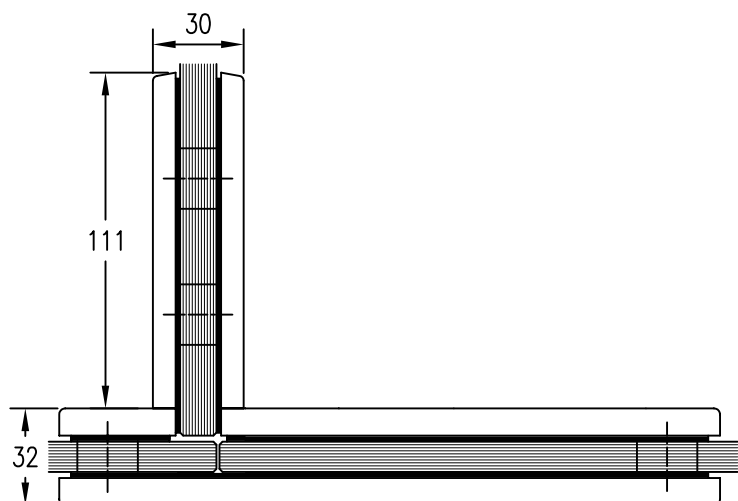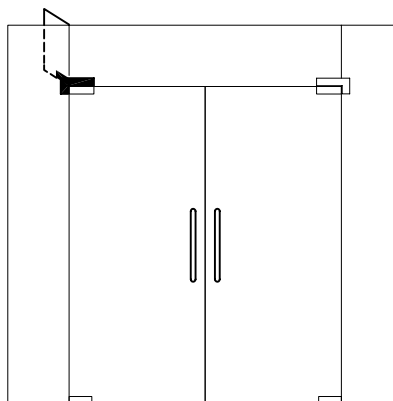


PLAN

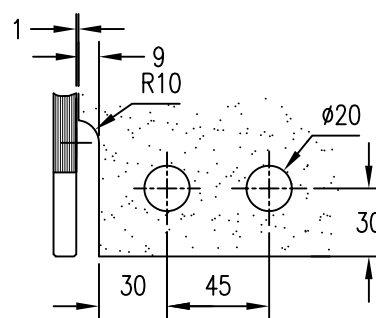

FIN GLASS PREPARATION

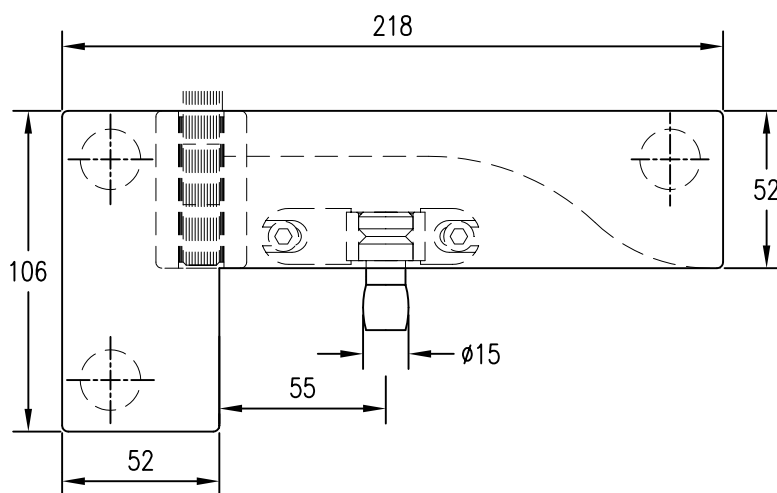

ELEVATION






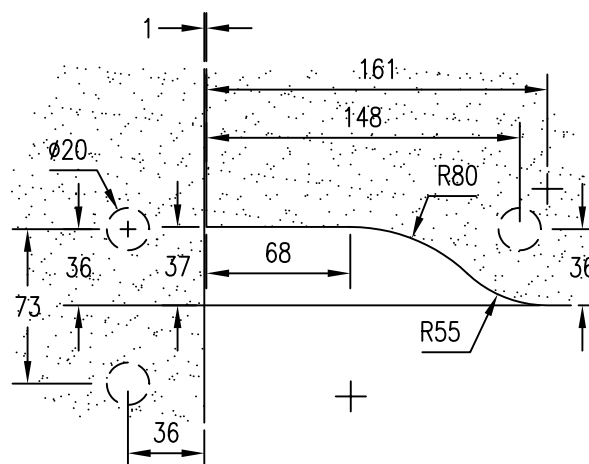


GLASS PREPARATION

PT41 & PT41S SPECIFICATION: Universal 218mm x 106mm PT41 Highlight to Sidelight Corner Link Patch with Fin Portion and Pivot, and PT40S Highlight to Sidelight Corner Link Patch with Fin Portion and Stop Insert. Pivot Point Set at 55mm.
Specify Glass Thickness 10, 12 or 15mm.
Specify Fin glass thickness 12 or 15mm.
Specify PT41S Stop Insert if required.
SPECIFY HANDING: LH or RH
ILLUSTRATED: PT41 LH

FINISHES:

ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

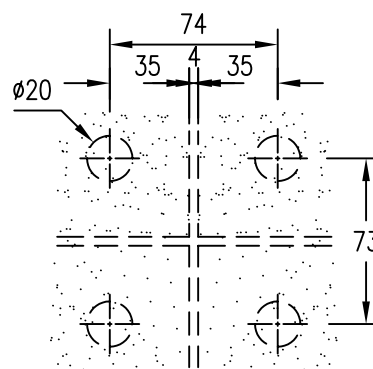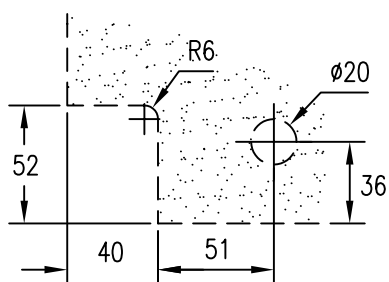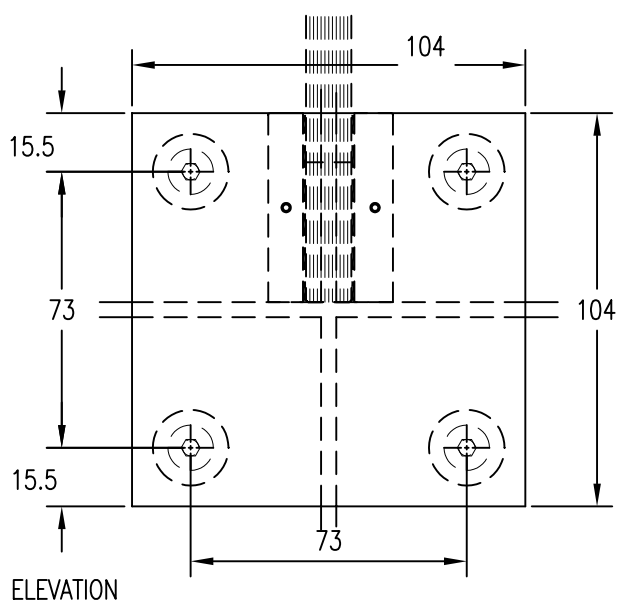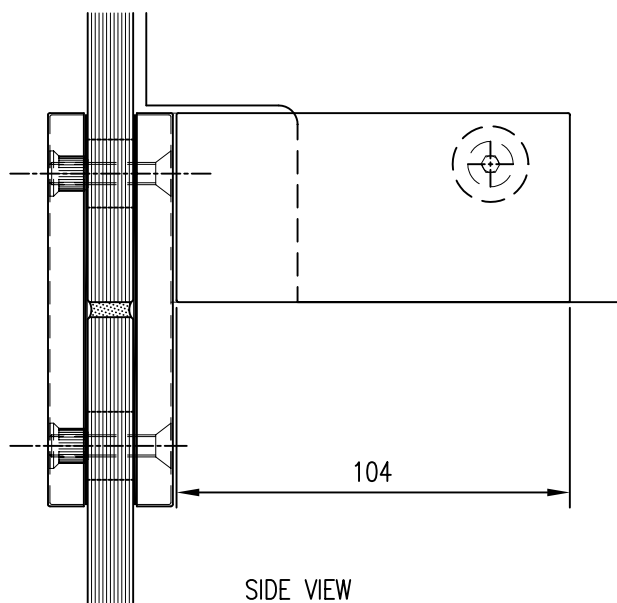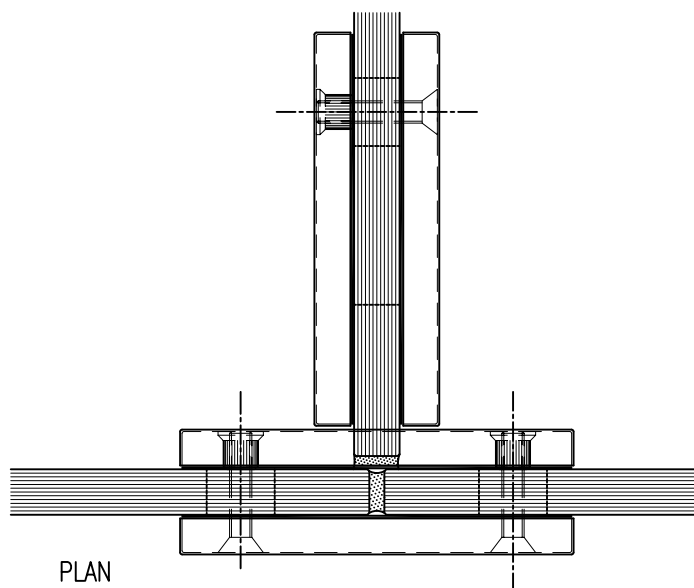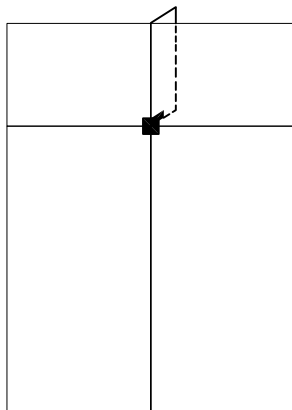

CD96 SPECIFICATION: ON-EAZI 104mm x 104mm Four Panel Link Patch with Fin Portion for connecting two or four panels of glass with Fin behind.

Specify Glass Thickness 10, 12 or 15mm.

Specify Fin glass thickness 12 or 15mm.

FINISHES:

ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		