
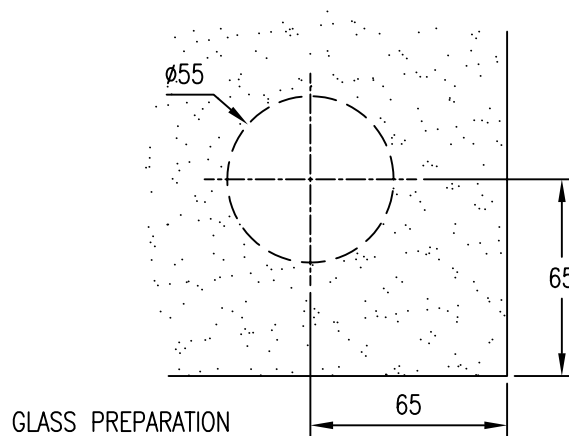
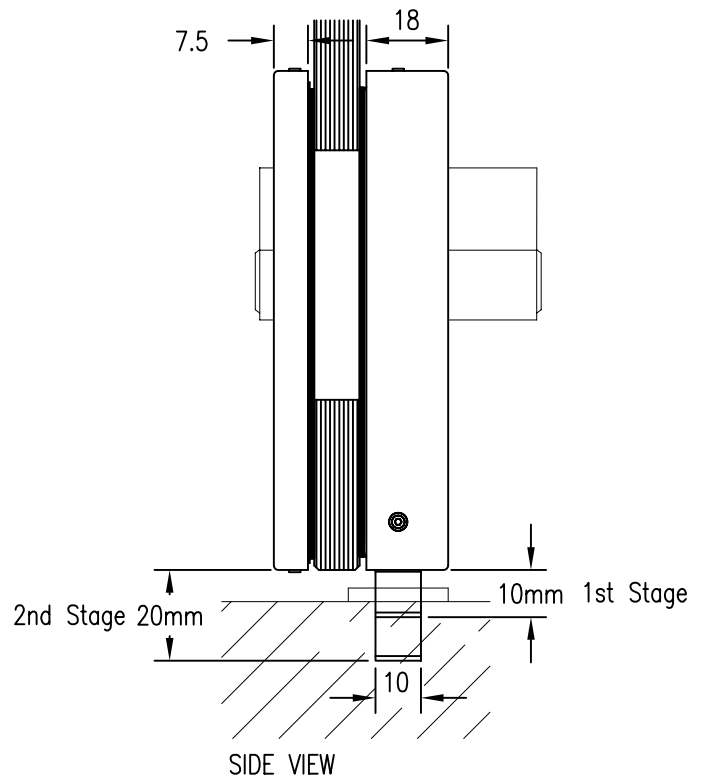




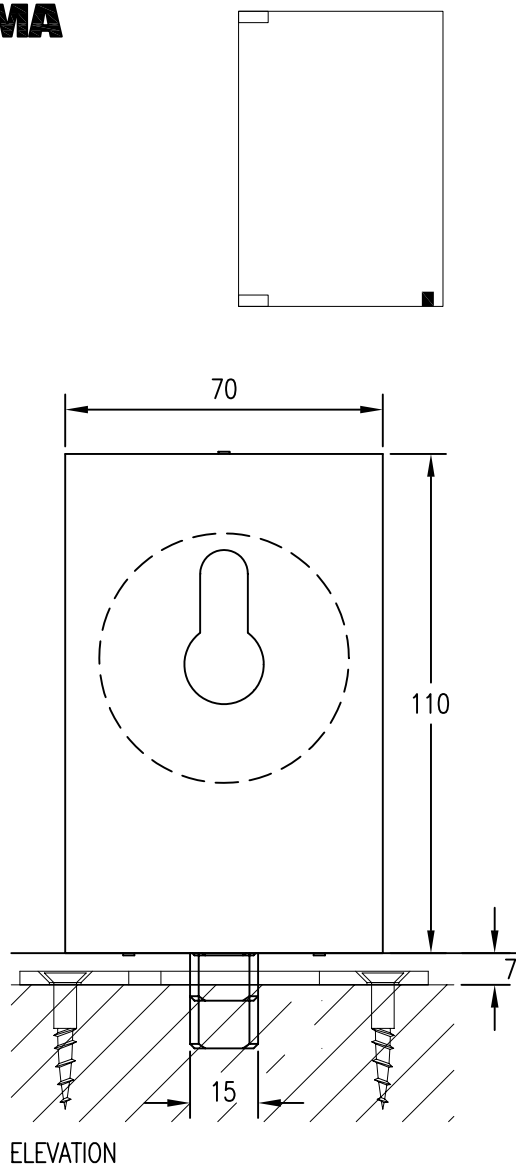


342.1 SPECIFICATION: Universal 110mm x 70mm Lower Pin Throw Patch Lock with Covers.
Specify Glass Thickness 10, 12 or 15mm.
ILLUSTRATED with 345 Keeper Plate
OPTIONAL: CD68 Cylinders

FINISHES:

ALUMINIUM STAINLESS

MILL	SSS
SAA	PSS
S/F	
P/S/F	

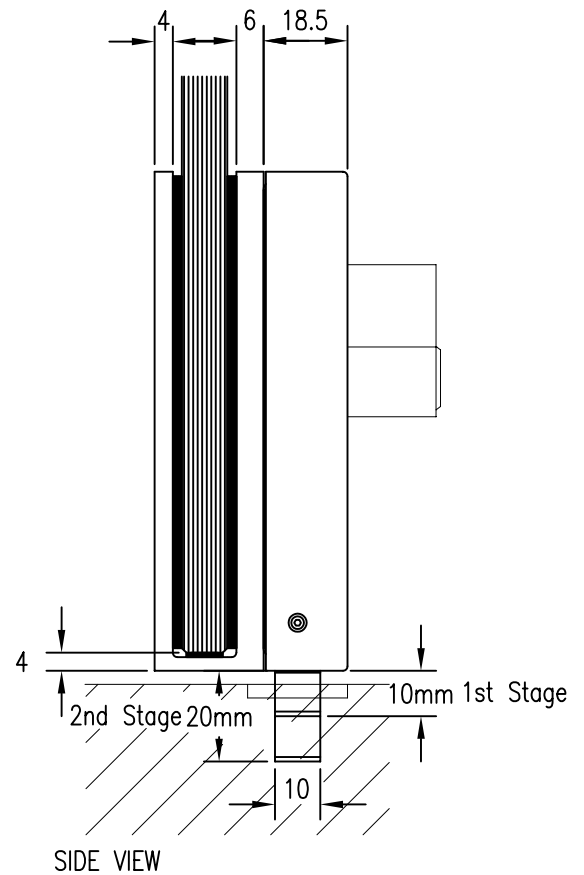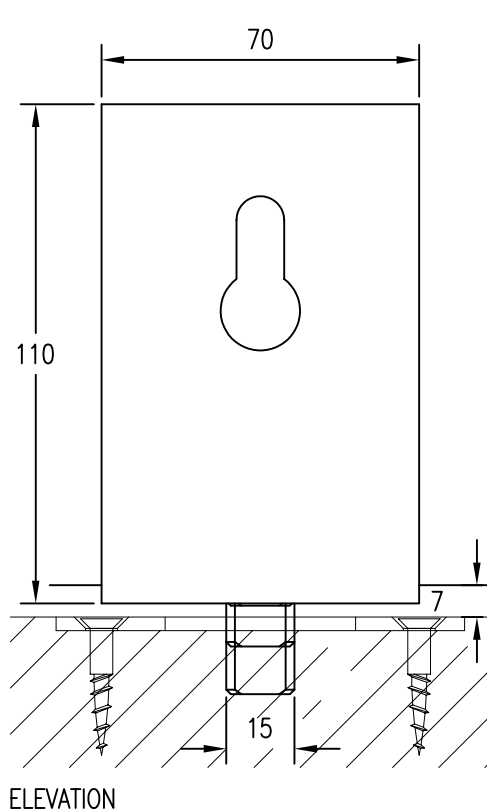


343.1 SPECIFICATION: Universal 110mm x 70mm Lower Pin Throw
Slide Over Patch Lock.
Specify Glass Thickness 10 or 12mm.
ILLUSTRATED with 345 Keeper Plate
OPTIONAL: CD68 Single Cylinder

FINISHES:

ALUMINIUM

EV1

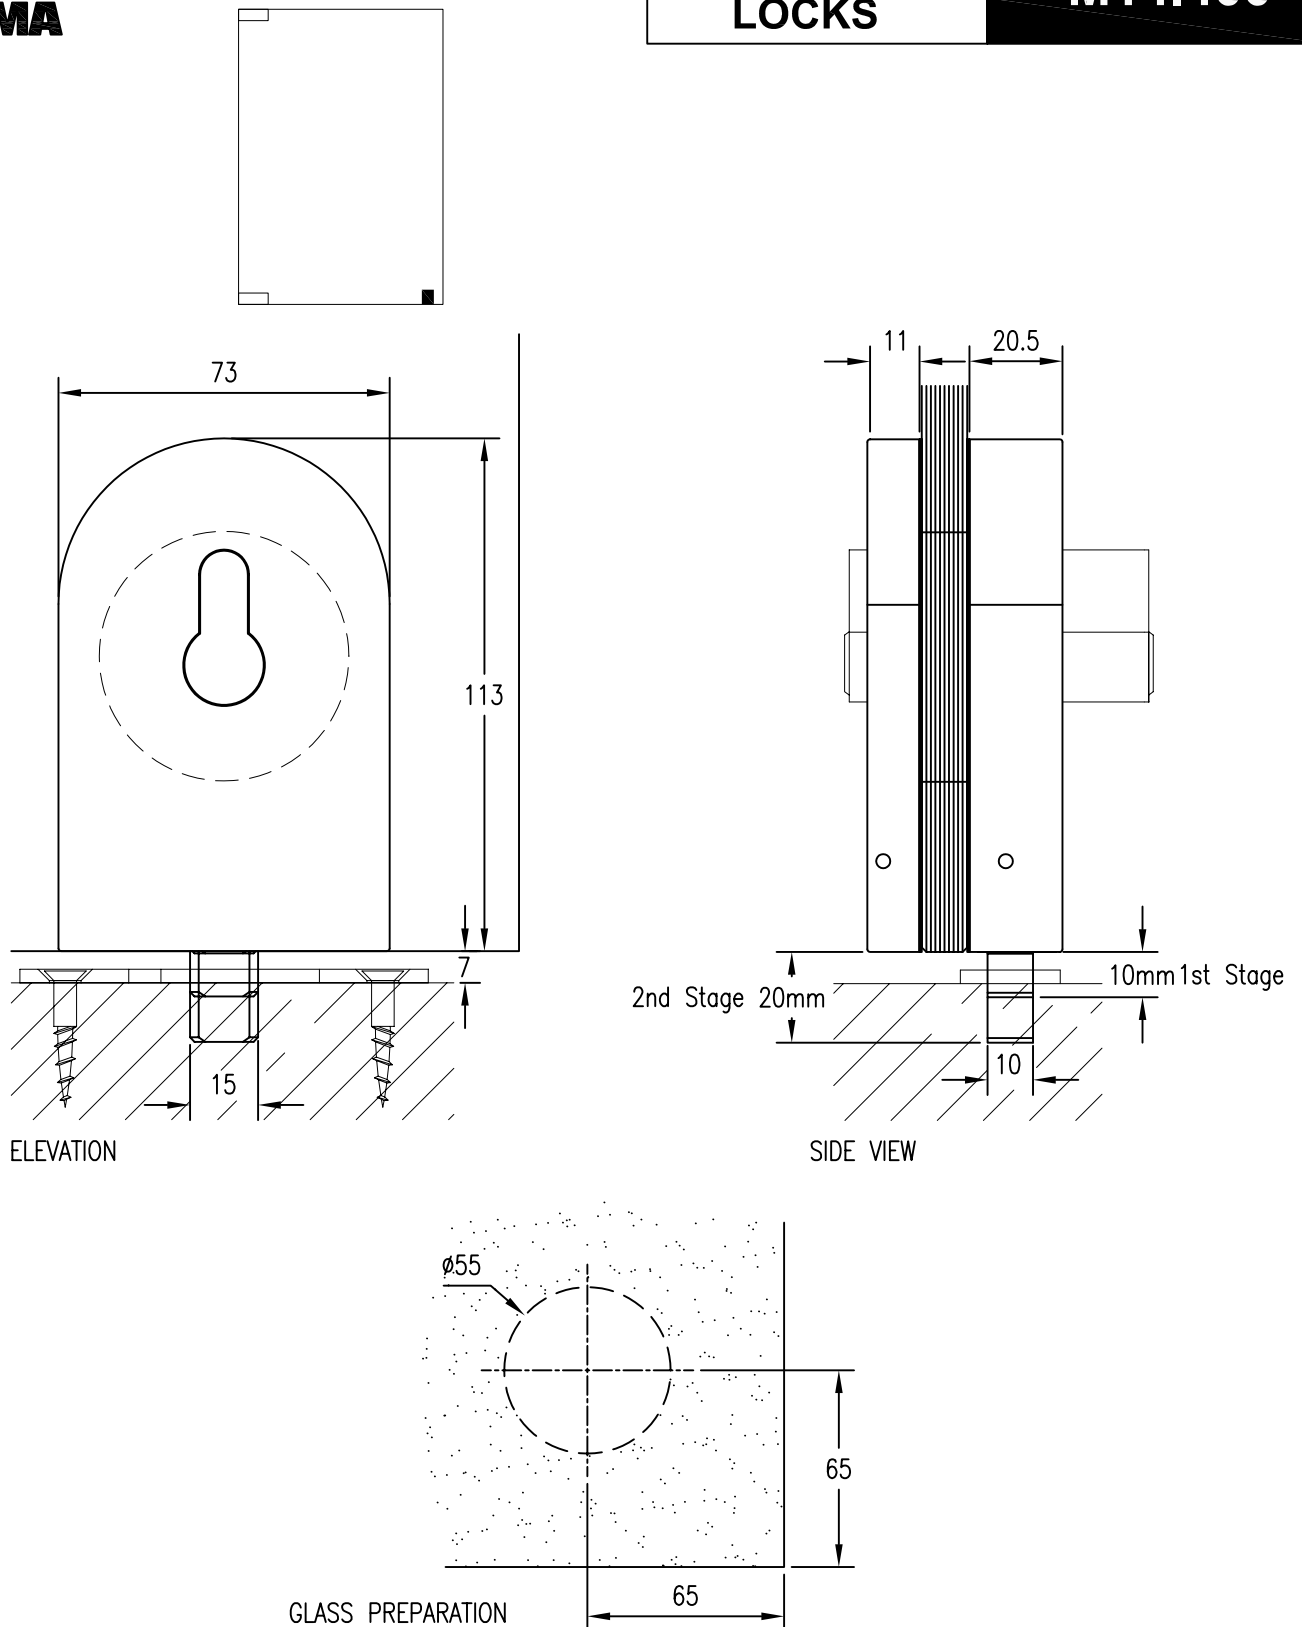

14.400 SPECIFICATION: MANET 113mm x 73mm Lower Pin Throw Patch Lock.

Specify Glass Thickness 10, 12 or 15mm.

ILLUSTRATED with 345 Keeper Plate



OPTIONAL: CD68 Cylinders

FINISHES:


STAINLESS

SSS


PSS

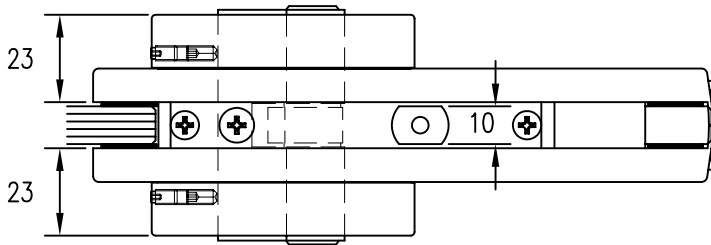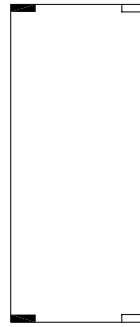


REFLECTED PLAN

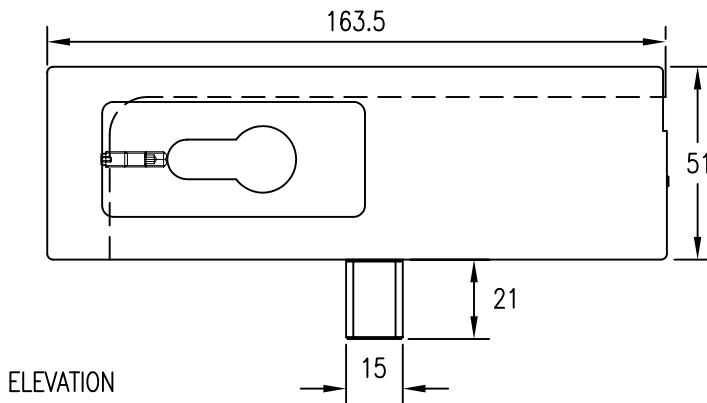

ELEVATION

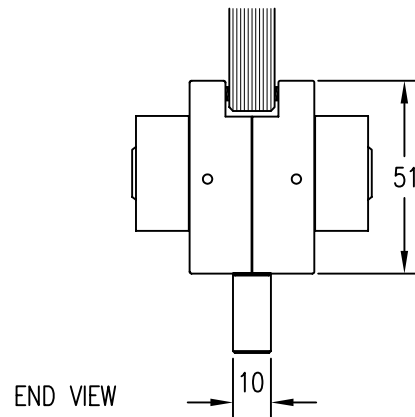

END VIEW

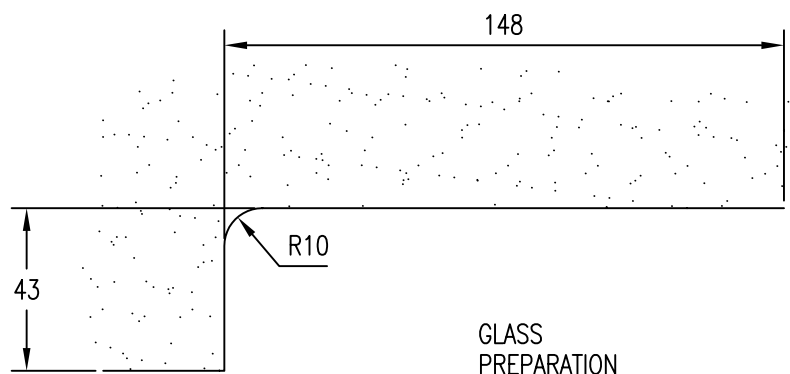

GLASS
PREPARATION

US10 SPECIFICATION: Universal 164mm x 51mm Lower Pin Throw Patch Lock.
Specify Glass Thickness 10, 12 or 15mm.
OPTIONAL: CD68 Cylinders

FINISHES:

ALUMINIUM

STAINLESS

MILL



SSS

SAA


PSS

S/F


P/S/F

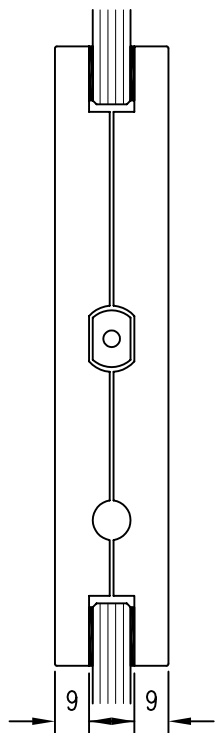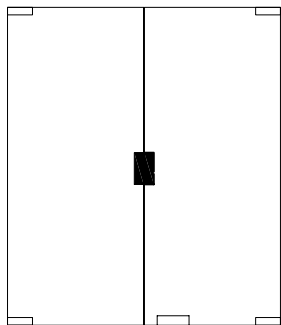


US20 SIDE VIEW

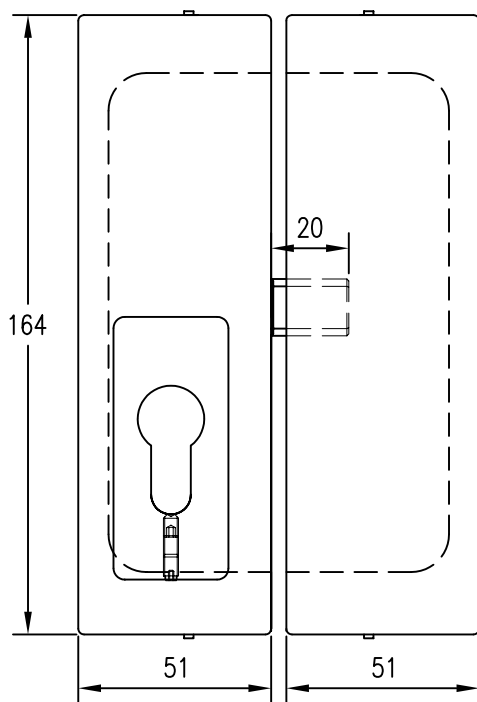


ELEVATION

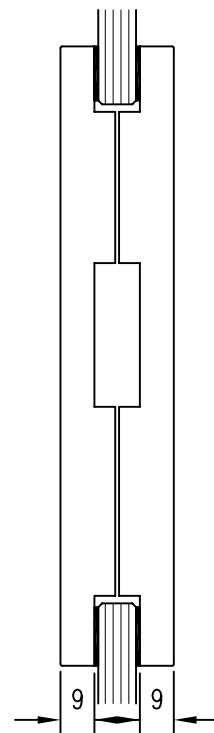

GK50 SIDE VIEW

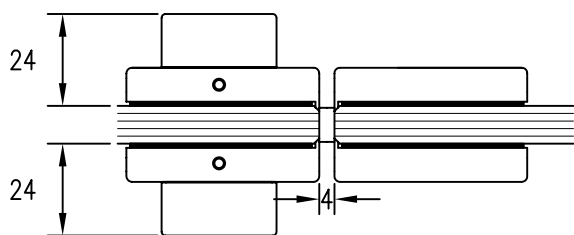

PLAN

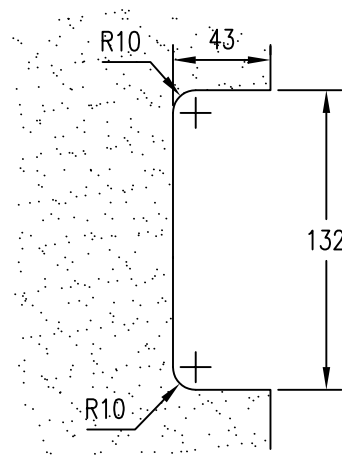

GLASS PREPARATION US20 & GK50

US20 & GK50 SPECIFICATION: Universal 164mm x 51mm US20 Side Mount Pin Throw Patch Lock, and GK50 Side Mount Patch Keeper to suit US20.

Specify Glass Thickness 10, 12 or 15mm.

OPTIONAL: CD68 Cylinders

FINISHES:

ALUMINIUM

STAINLESS

MILL





SSS

SAA

PSS

S/F



P/S/F

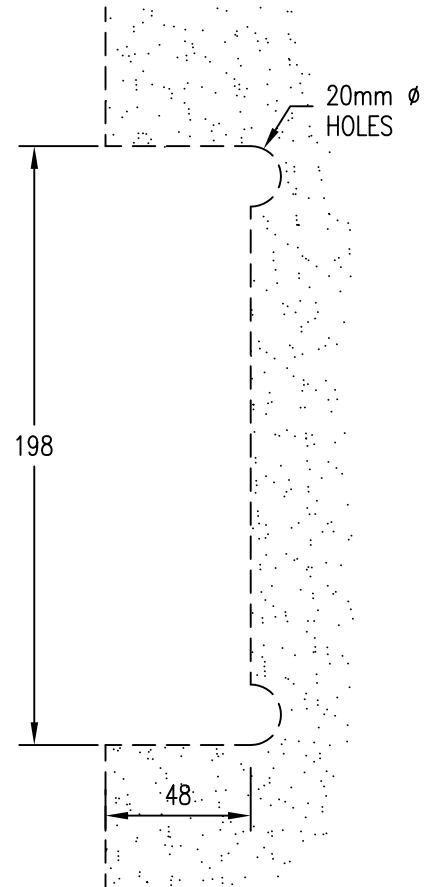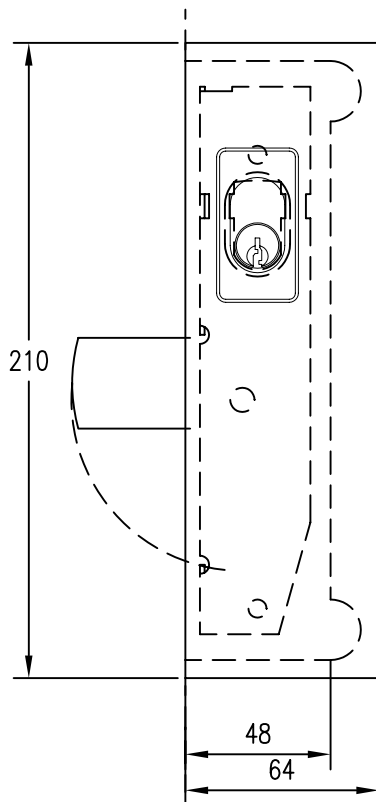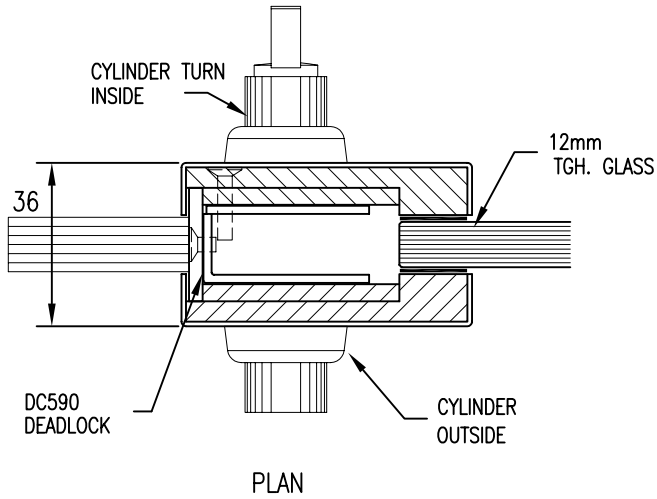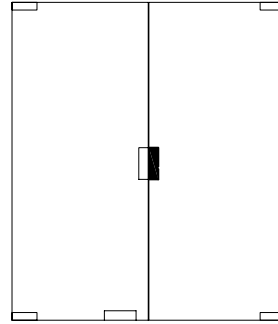


CD351A SPECIFICATION: ON-EAZI Side Fix Patch Lock complete with Door Lock (DC 590).
Specify Lock operation single cylinder, double cylinder or cylinder and turn.
Note: Add CD351K if matching Patch Keeper is required. (refer 4-07)
Specify glass thickness 10,12 or 15mm

FINISHES:


ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

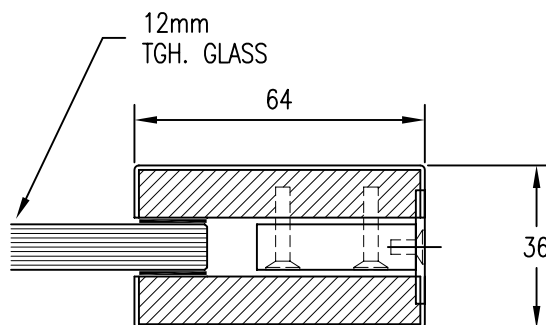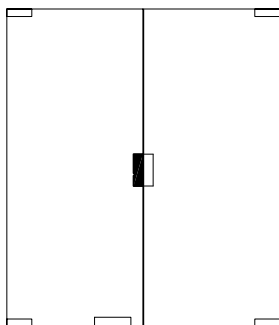

PLAN

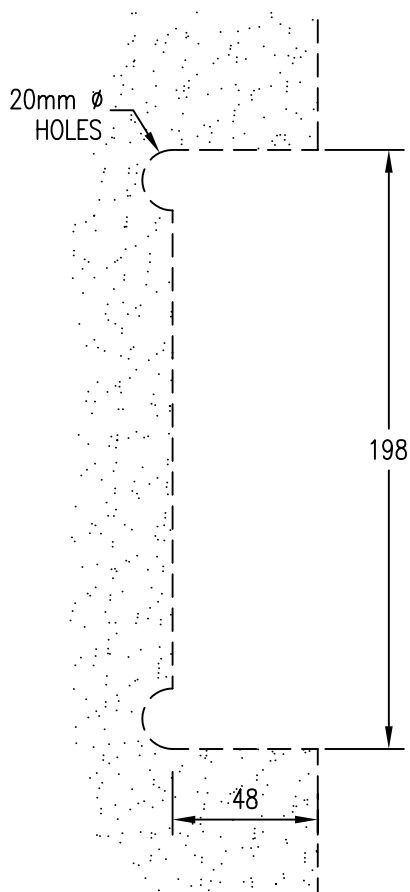

GLASS PREPARATION

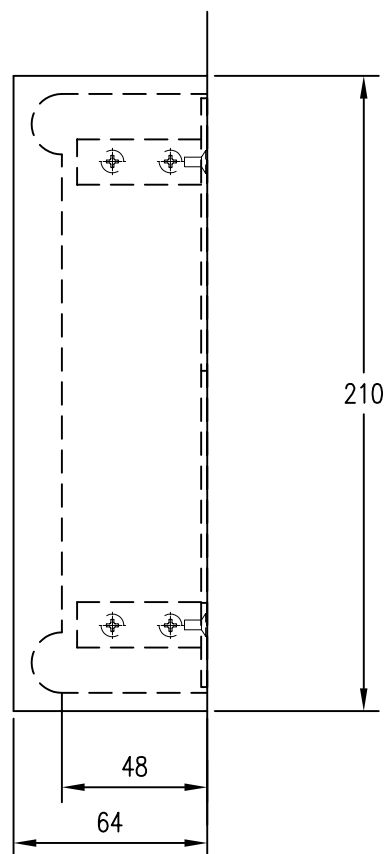

ELEVATION

CD351K SPECIFICATION: ON-EAZI Side Fix Patch Keeper to suit CD351A with Door Lock (DC 590).
Specify glass thickness 10,12 or 15mm

FINISHES:

ALUMINIUM

BRASS

STAINLESS

MILL

PBU

SSS

SAA





CP

PSS

S/F

SCP

P/S/F

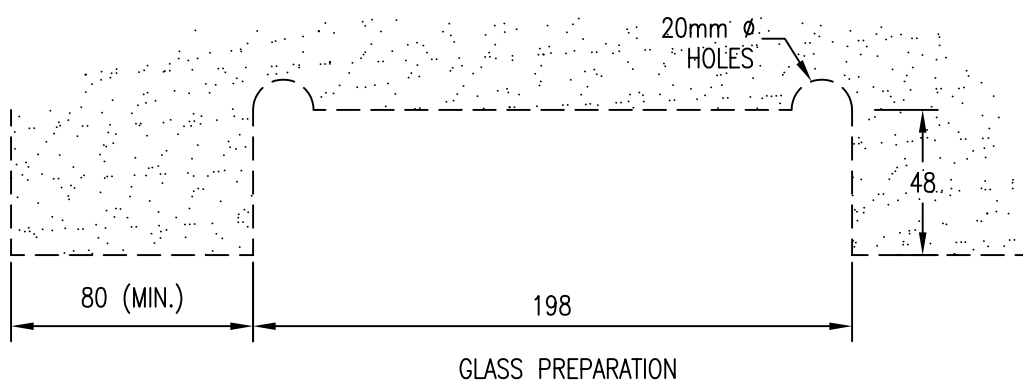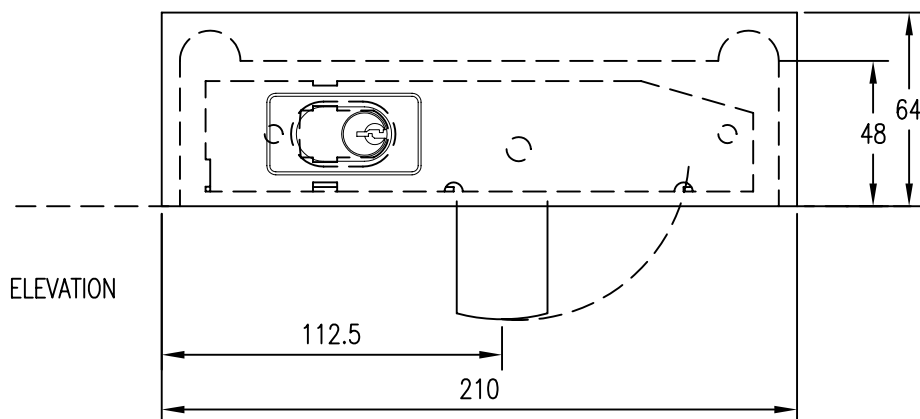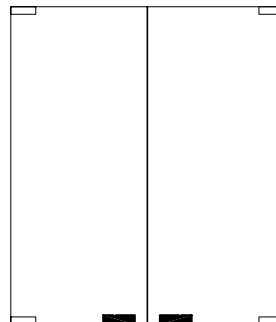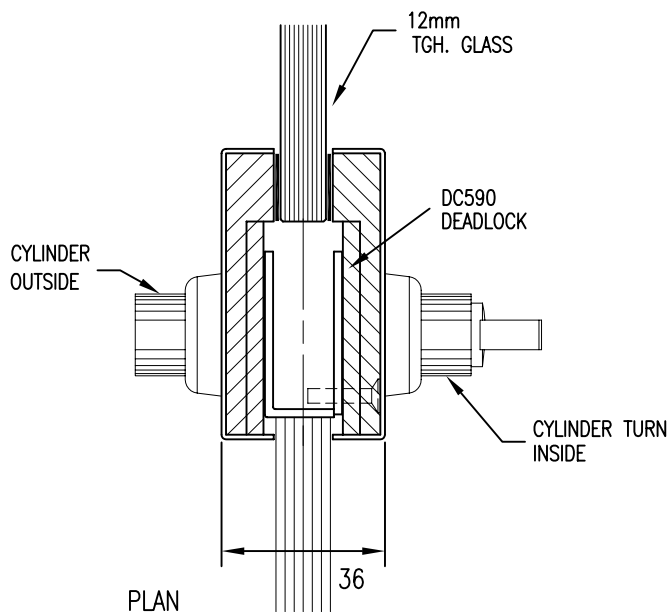

CD351B SPECIFICATION: ON-EAZI Bottom Fix Patch Lock complete with Door Lock (DC 590).


Specify Lock operation single cylinder, double cylinder or cylinder and turn.

Note: Add CD353 Lock Trough Floor Keeper if required.

Specify glass thickness 10,12 or 15mm



FINISHES:

ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

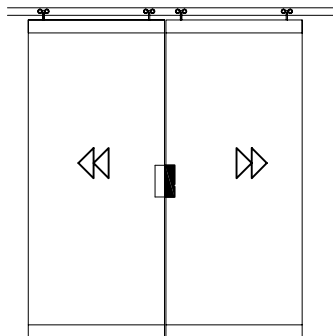


PATCH LOCKS

CD351S

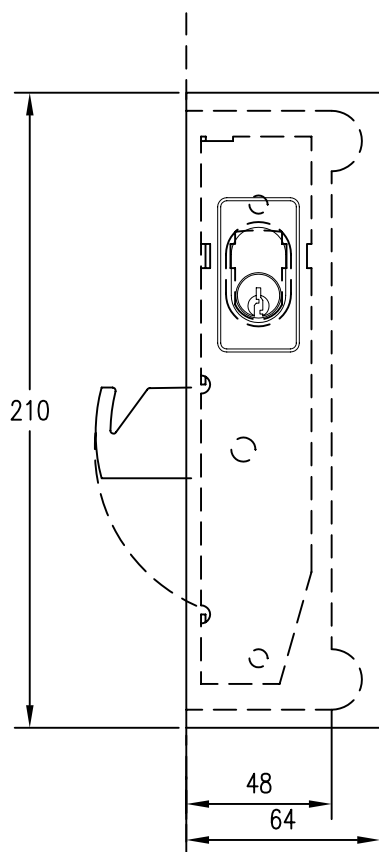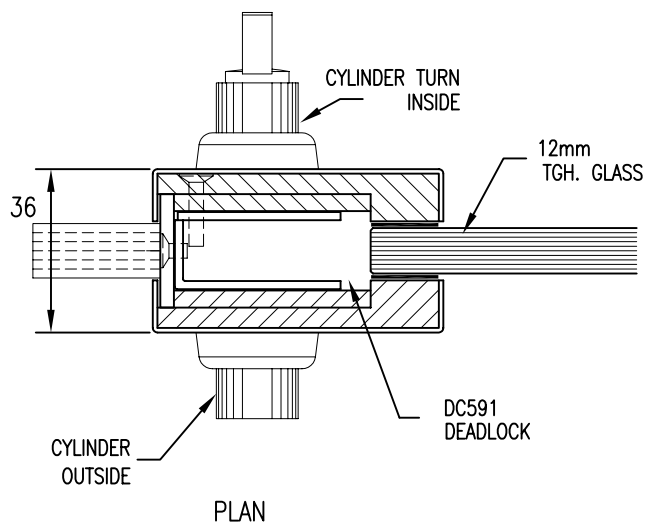

ELEVATION

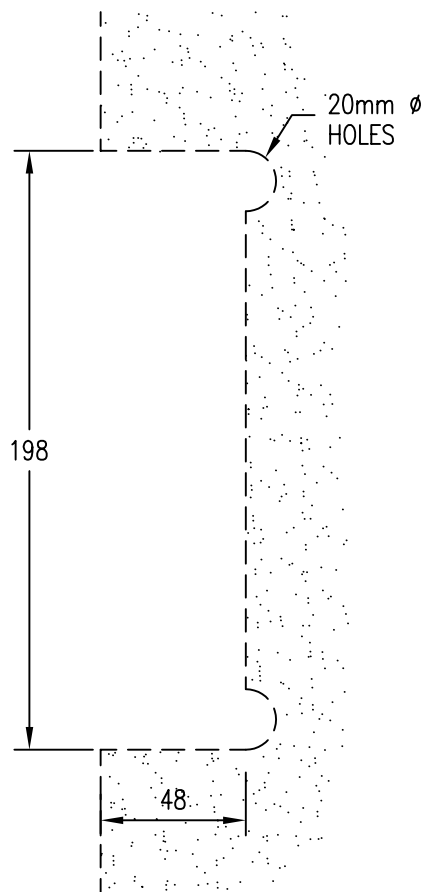


GLASS PREPARATION



CD351S SPECIFICATION: ON-EAZI Sliding Door Side Fix Patch Lock complete with Door Lock (DC 591).
Specify Lock operation single cylinder, double cylinder or cylinder and turn.
Note: Add CD351KS if matching Patch Keeper is required.
Specify glass thickness 10,12 or 15mm

FINISHES:


ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

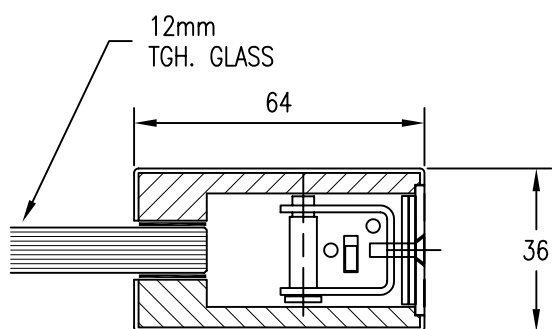

PLAN

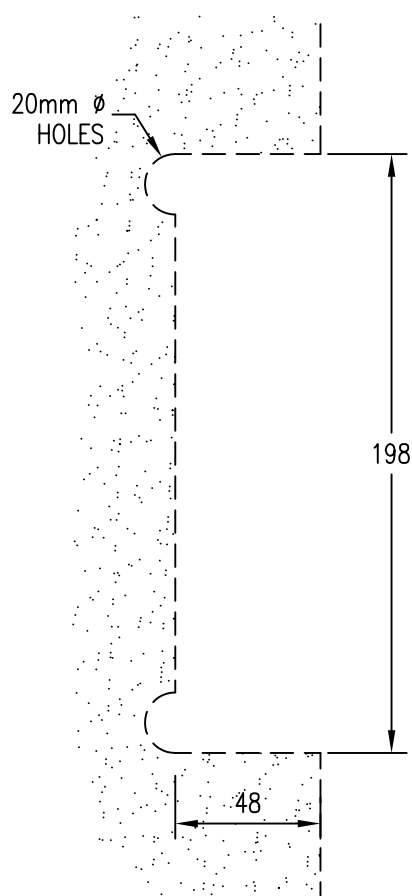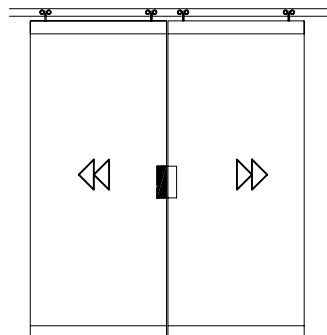

GLASS PREPARATION

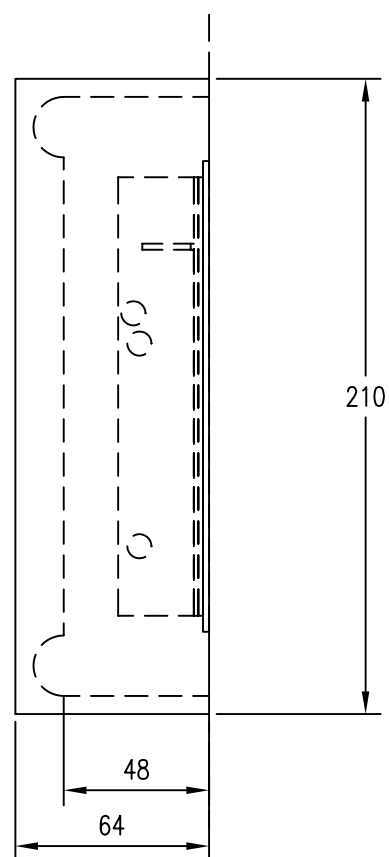

ELEVATION

CD351KS SPECIFICATION: ON-EAZI Sliding Door Side Fix Patch Keeper to suit CD351S with Door Lock (DC 591).
Specify glass thickness 10,12 or 15mm

FINISHES:

ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		







PATCH LOCKS



PATCH FITTINGS (AUST) PTY LTD

22 York Road • P.O. Box 403 • Ingleburn NSW Australia 2565
Phone (02) 9605 5822 • Fax 1800 821 299
A Dorma Group Company

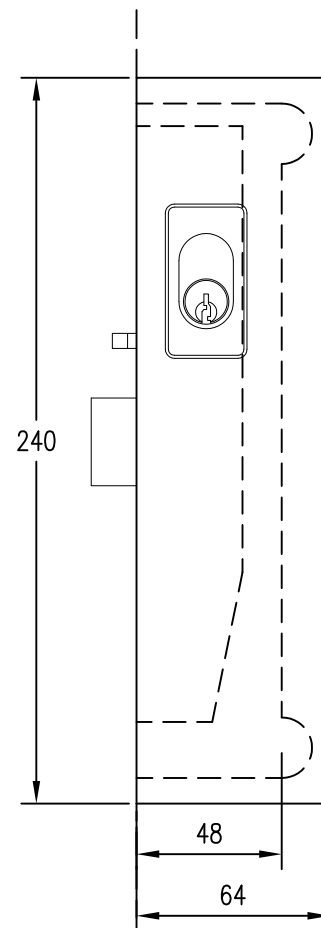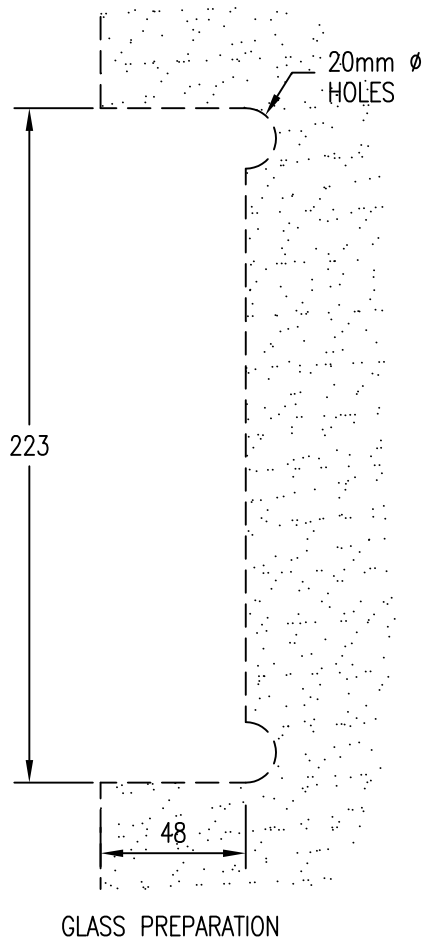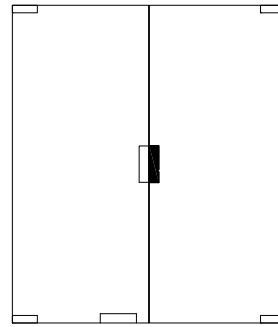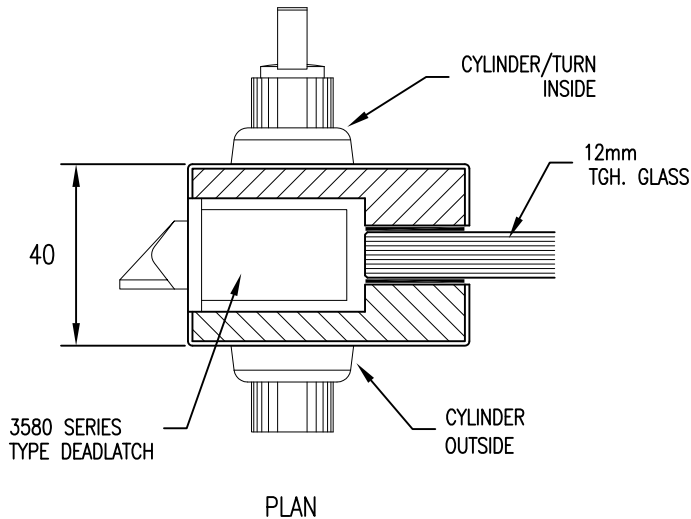

CD451 SPECIFICATION: ON-EAZI Side Fix Patch Lock complete with Door Lock (3580 Type).

Specify Lock operation single cylinder, double cylinder or cylinder and turn.



Specify Hand of Door.

Note: Add CD451K if matching Patch Keeper is required. (refer 4-15)



Specify glass thickness 10,12 or 15mm

FINISHES:

ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

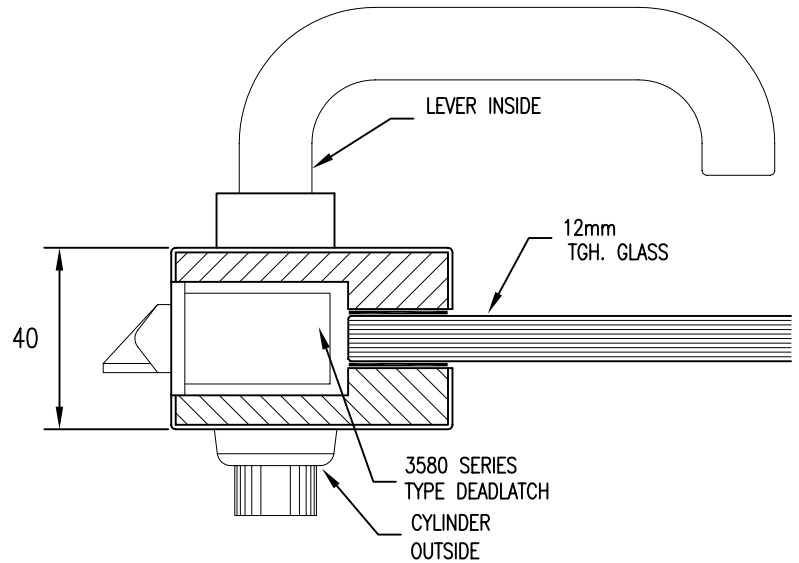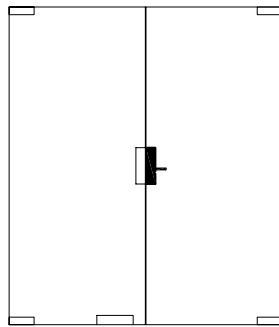

PLAN

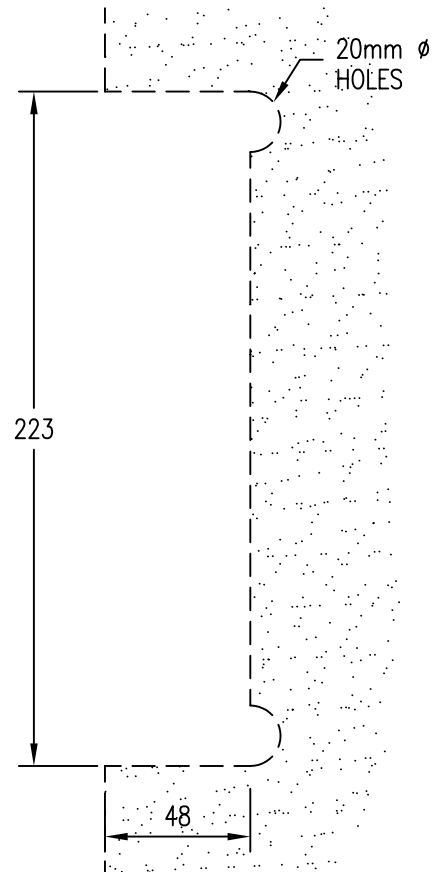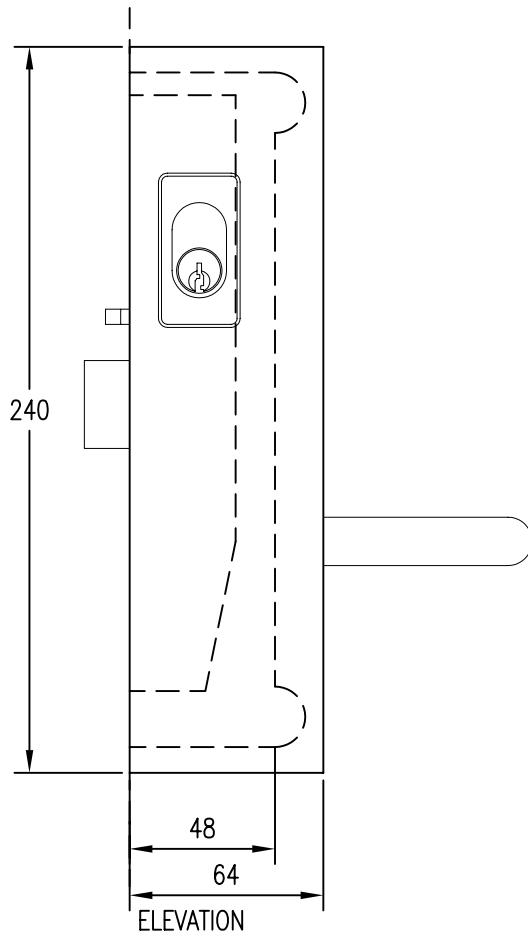


GLASS PREPARATION


CD451E SPECIFICATION: ON-EAZI Side Fix EGRESS Patch Lock complete with Door Lock (3580 Type) and Lever Furniture inside. Specify Lock operation, free lever inside only, cylinder or blank outside. Specify hand of door.
Note: Add CD451K if matching Patch Keeper is required. refer 4-15
Specify glass thickness 10,12 or 15mm

FINISHES:



ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

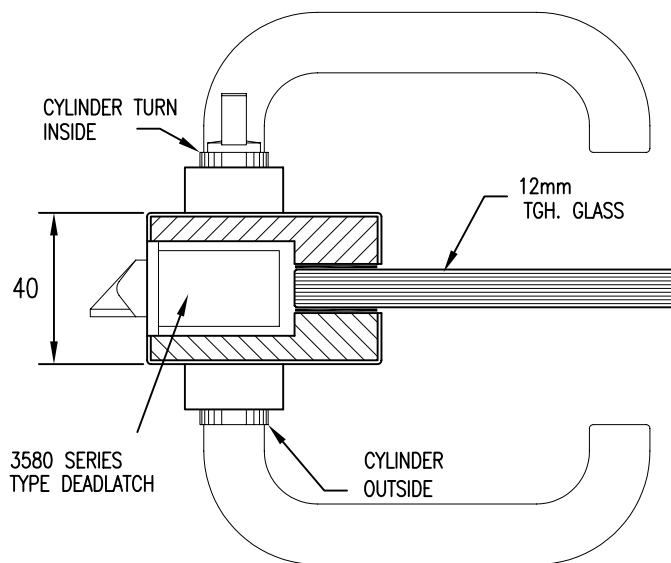

PLAN

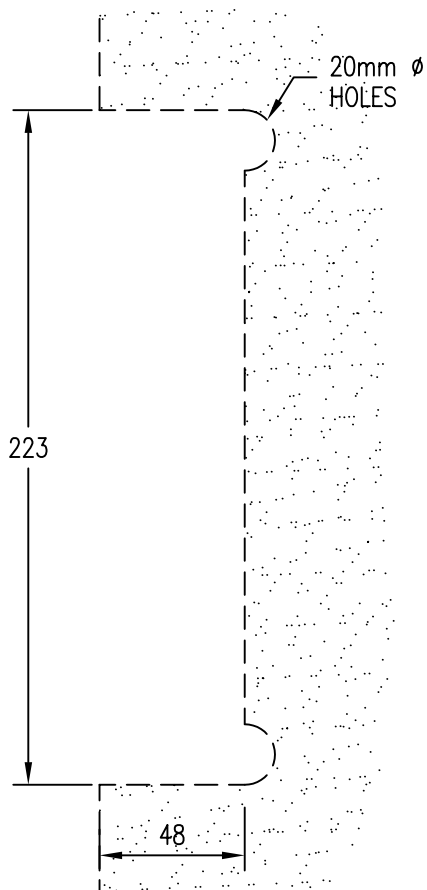

GLASS PREPARATION


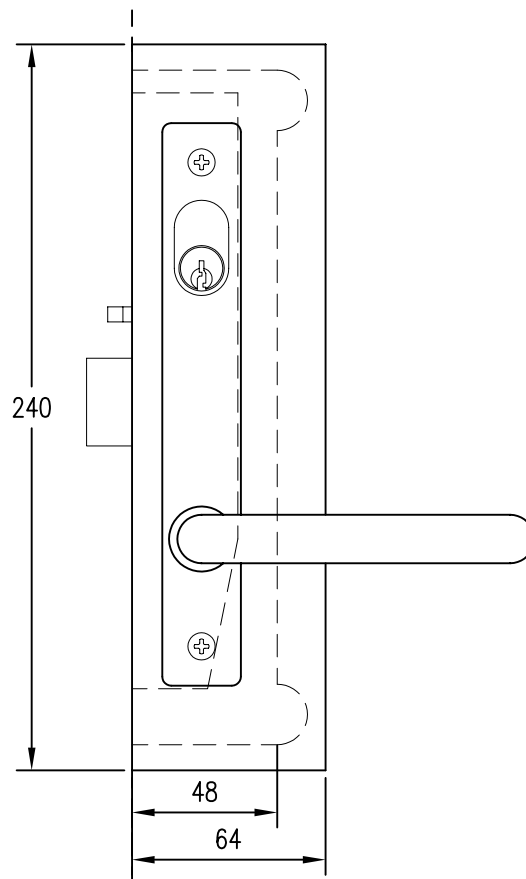
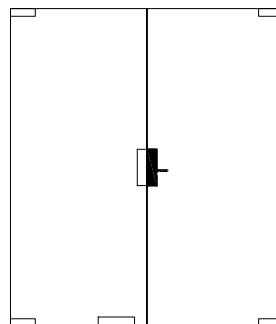


ELEVATION


CD451F SPECIFICATION: ON-EAZI Side Fix Patch Lock complete with Door Lock (3580 Type) and Lever Furniture.
Specify Lock operation single cylinder, double cylinder or cylinder and turn with double levers.
Specify hand of door.
Note: Add CD451K if matching Patch Keeper is required. refer 4-15
Specify glass thickness 10,12 or 15mm

FINISHES:

ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

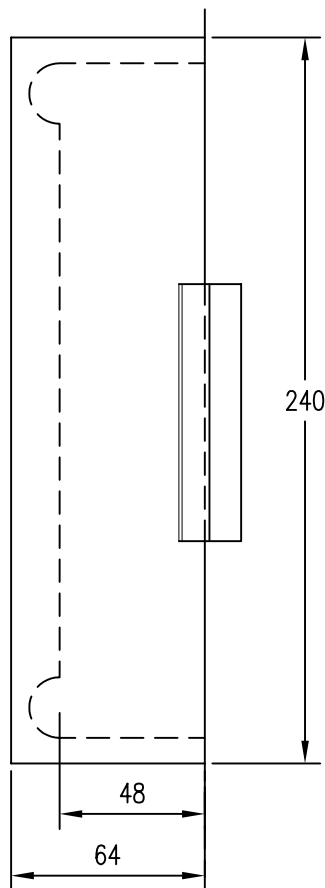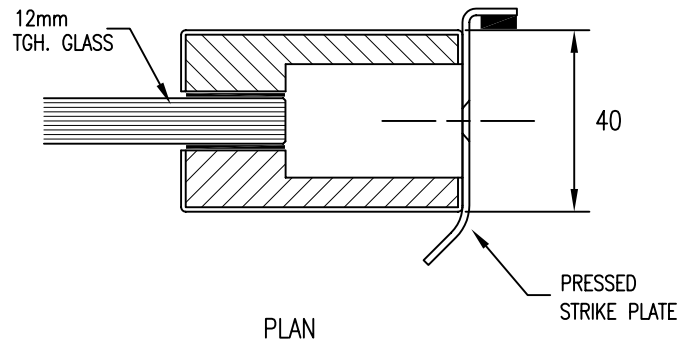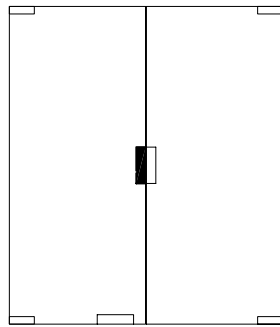

ELEVATION




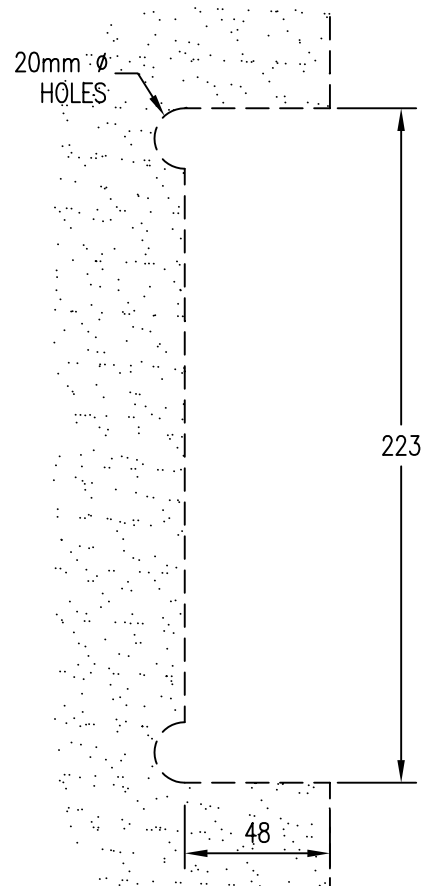


GLASS PREPARATION

CD451K SPECIFICATION: ON-EAZI Side Fix Patch Lock Keeper to suit CD451, CD451E and CD451F with Door Locks (3580 Type). Specify glass thickness 10,12 or 15mm

FINISHES:

ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

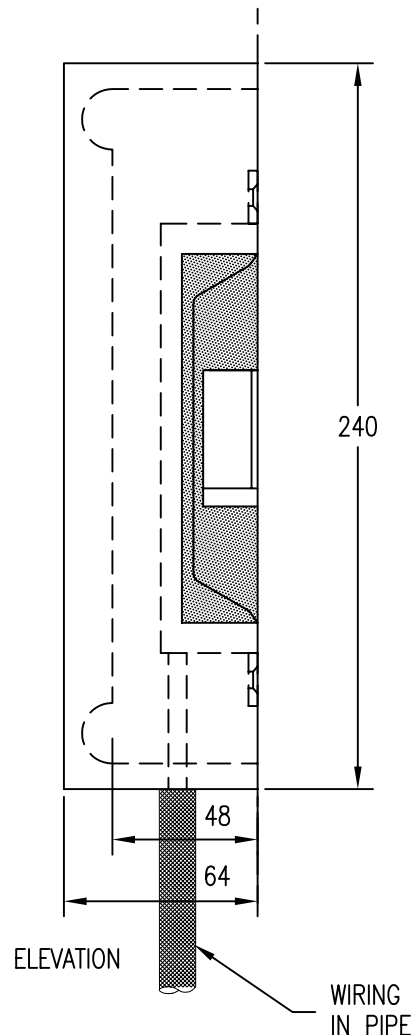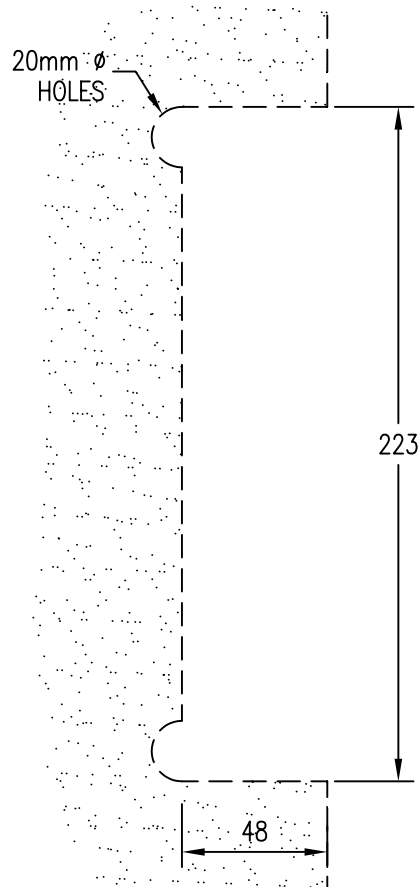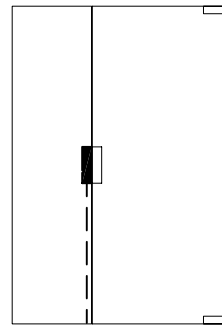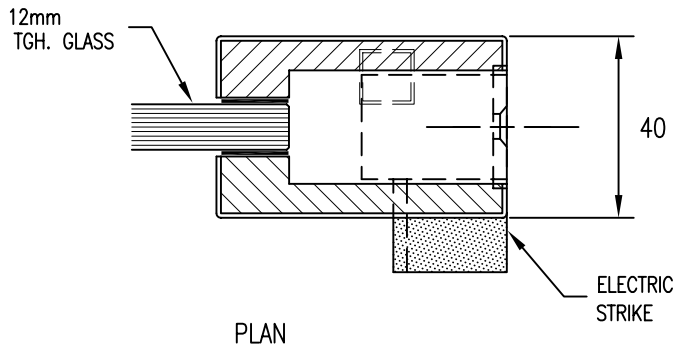

CD451KE SPECIFICATION: ON-EAZI Side Fix Patch Keeper incorporating Padde ES2000 Electric Strike to suit CD451, CD451E and CD451F with Door Lock (3580 Type).

Note: Wiring possibilities include surface pipe, edge channel or horizontal silicone joint.




Note: Wiring by surface pipe indicated on drawing.

Specify glass thickness 10,12 or 15mm


Specify Handing

FINISHES:

ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

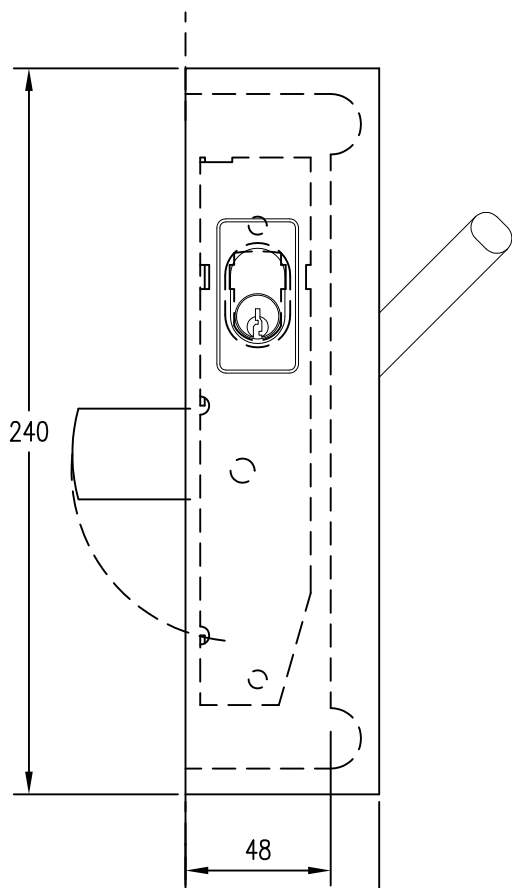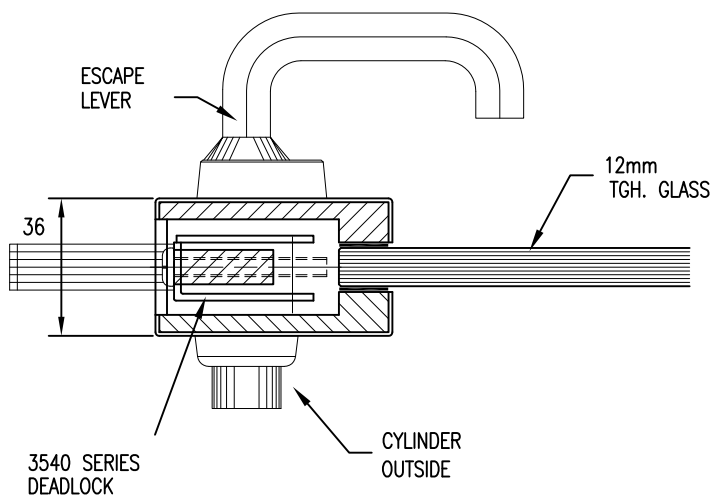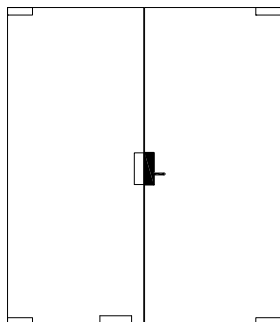

ELEVATION

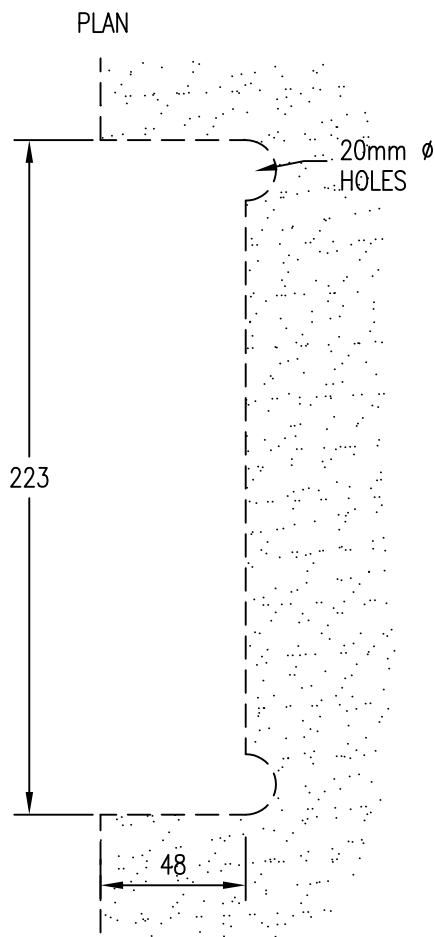

GLASS PREPARATION

CD451/3540 SPECIFICATION: ON-EAZI Side Fix Patch Lock complete with Door Lock (3542 Long Throw) or (3540 Short Throw).
Specify Lock operation: cylinder outside and lever inside or lever inside only.
Specify hand of door.
Specify CD451/3542 for Long Throw or CD451/3540 for Short Throw.
Note: Add CD451K/3540 if matching Keeper is required. (refer 4-16B)
Specify glass thickness 10,12 or 15mm

FINISHES:

ALUMINIUM

BRASS

STAINLESS

MILL

PBU

SSS

SAA





CP

PSS

S/F

SCP



P/S/F

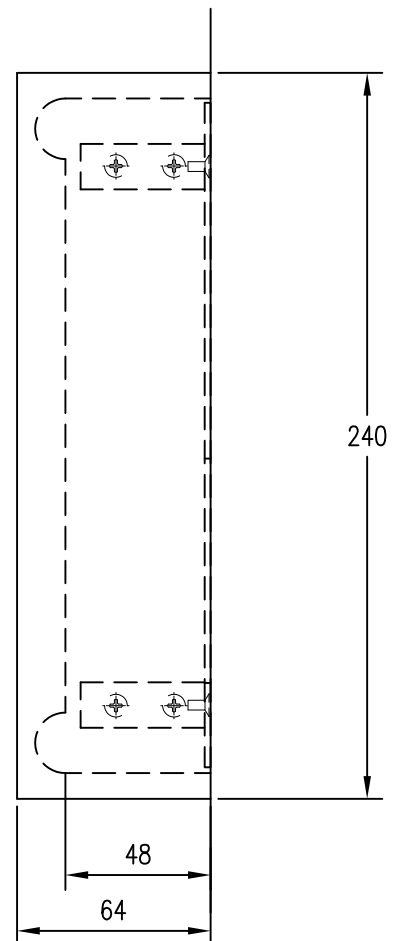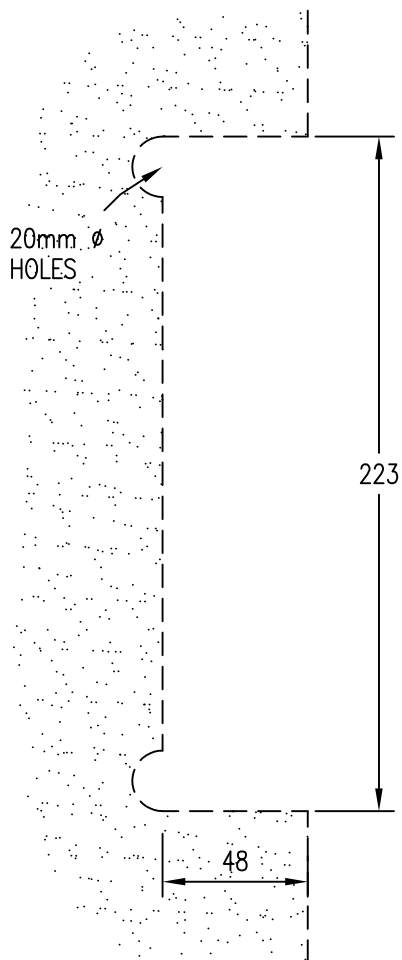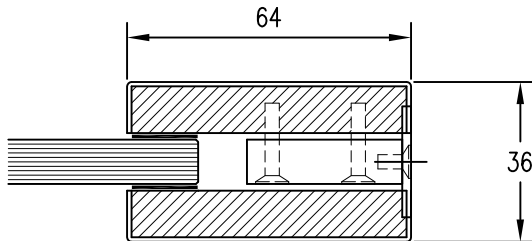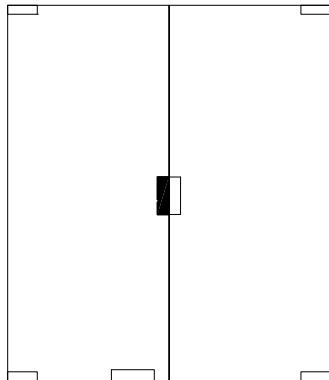


CD451K/3540 SPECIFICATION: ON-EAZI Side Fix Patch Keeper to suit CD451/3540 Door Lock
Specify glass thickness 10,12 or 15mm

FINISHES:


ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

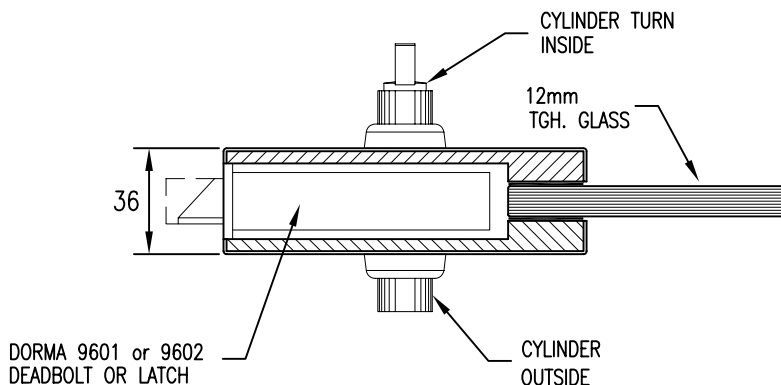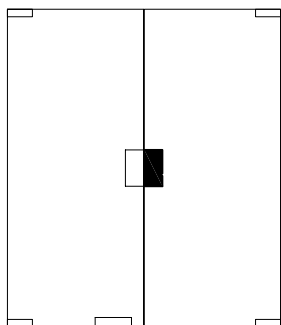

PLAN

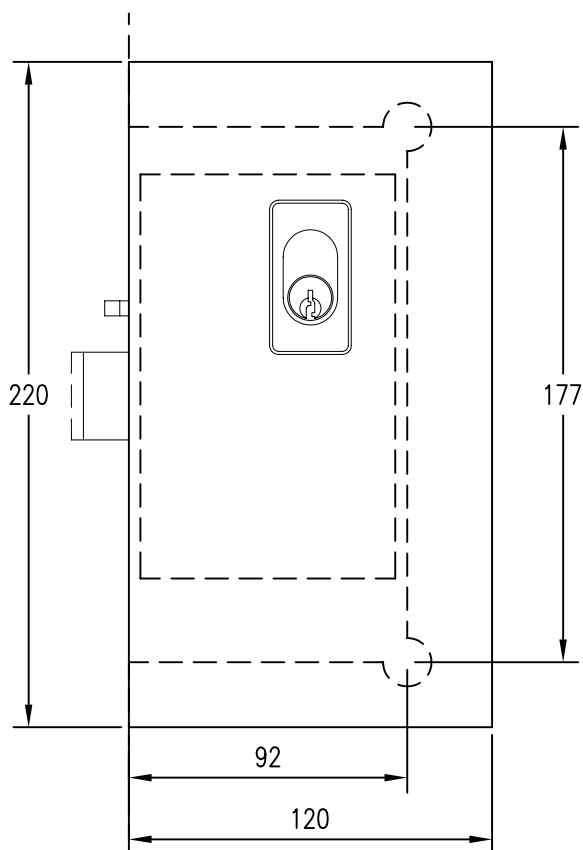

ELEVATION



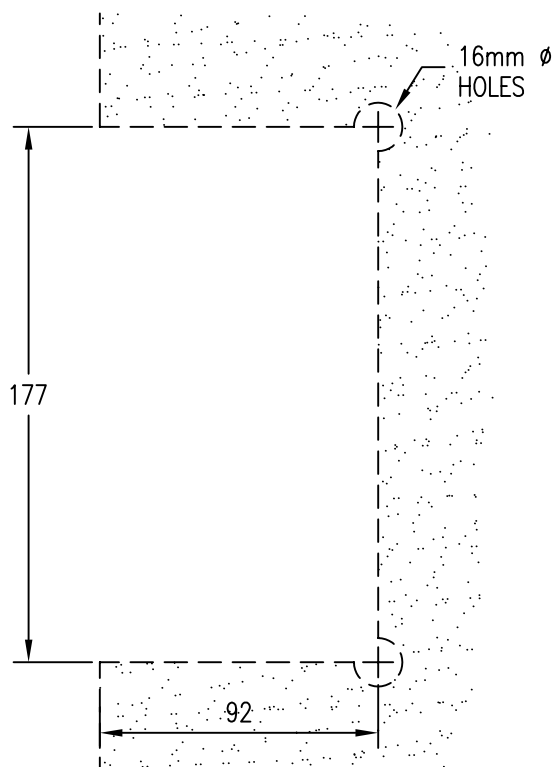


GLASS PREPARATION


CD1050 SPECIFICATION: ON-EAZI Side Fix Patch Lock complete with wide backset Door Lock (DORMA 9601 or 9602).
Specify Lock operation single cylinder, double cylinder or cylinder and turn.
Specify hand of door.
Note: Add CD1051K or CD1050K if matching
Patch Keeper required. refer 4-20
Specify glass thickness 10,12 or 15mm
Specify Lock Type 9601 Deadbolt / 9602 Deadlatch

FINISHES:

ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

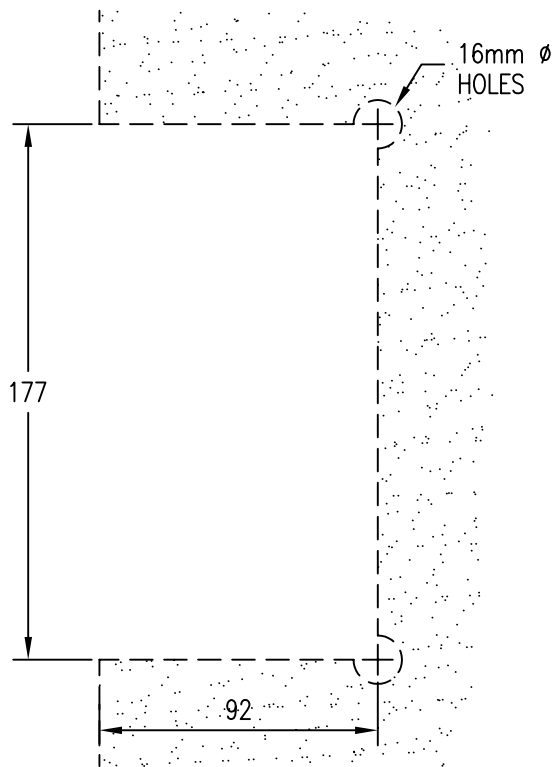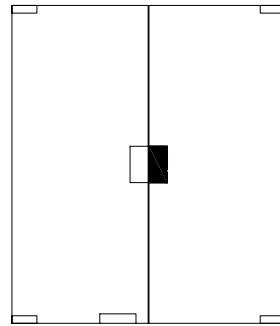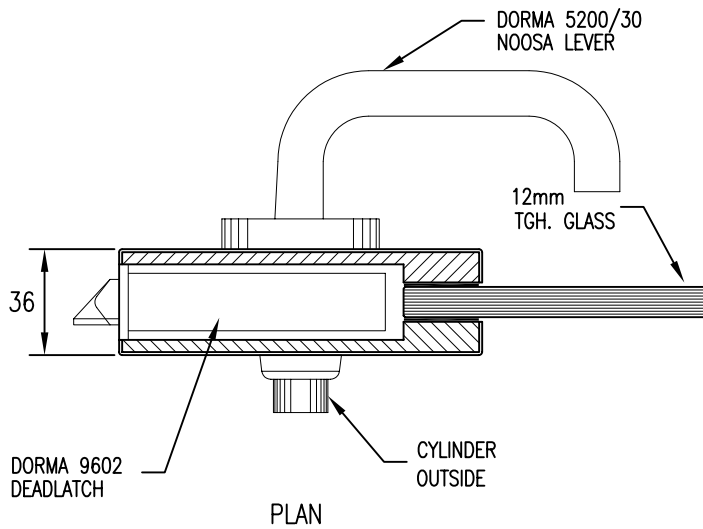

GLASS PREPARATION

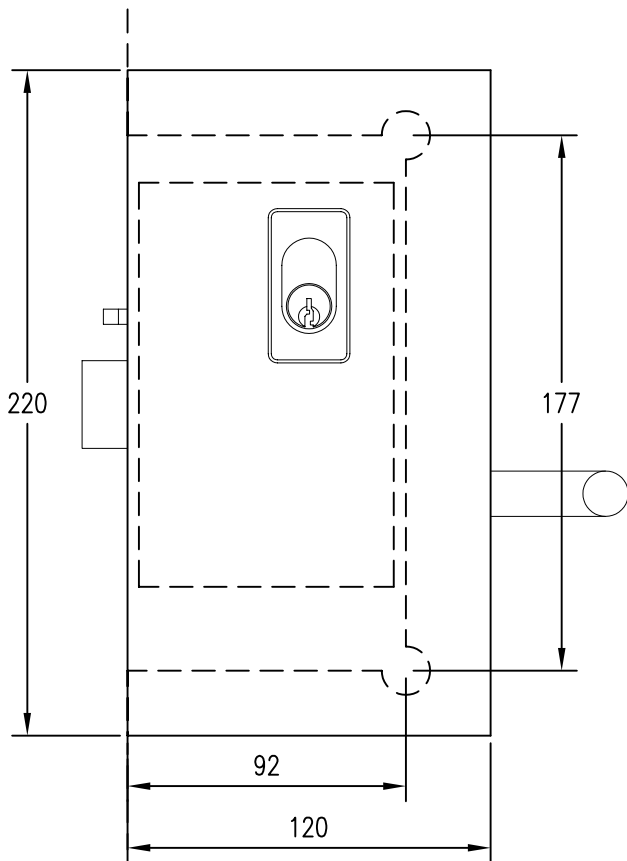

ELEVATION

CD1050E SPECIFICATION: ON-EAZI Side Fix EGRESS Latch Lock complete with wide backset Door Lock (DORMA 9602) and Lever Furniture inside only.

Specify Lock operation free lever inside always, cylinder or blank outside. Specify hand of door.




Note: Add CD1051K or CD1050K if matching

Patch Keeper required. refer 4-20


Specify glass thickness 10,12 or 15mm

FINISHES:

ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

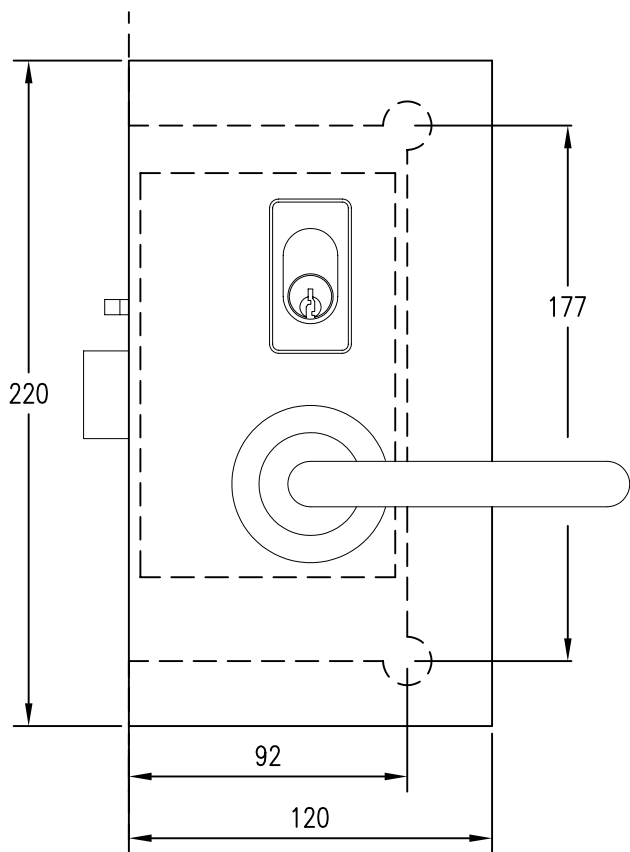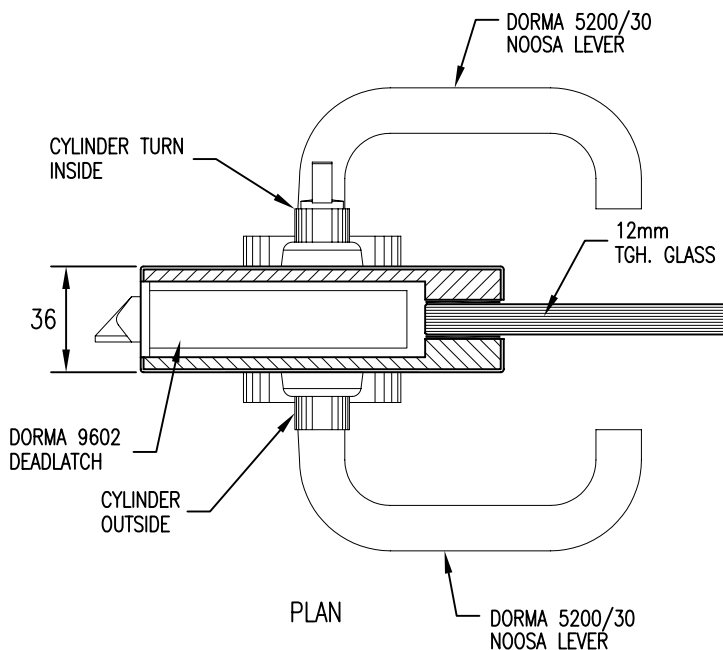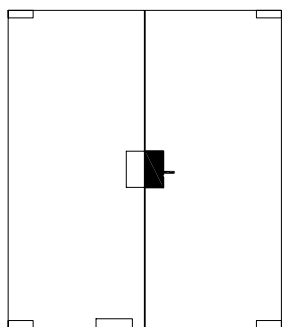

ELEVATION



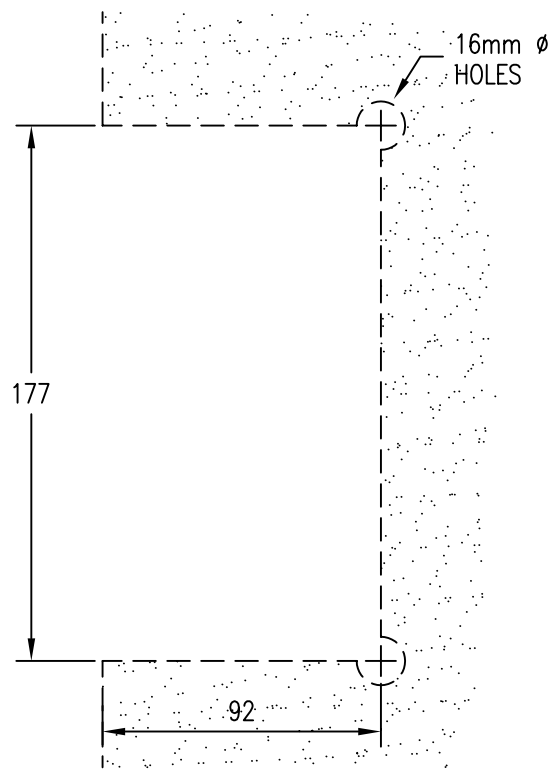


GLASS PREPARATION


CD1050F SPECIFICATION: ON-EAZI Side Fix Patch Lock complete with wide backset Door Lock (DORMA 9602) and Lever Furniture. Specify Lock operation single cylinder, double cylinder or cylinder and turn with double levers. Specify hand of door. Note: Add CD1051K or CD1050K if matching Patch Keeper required. refer 4-20 Specify glass thickness 10,12 or 15mm

FINISHES:

ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

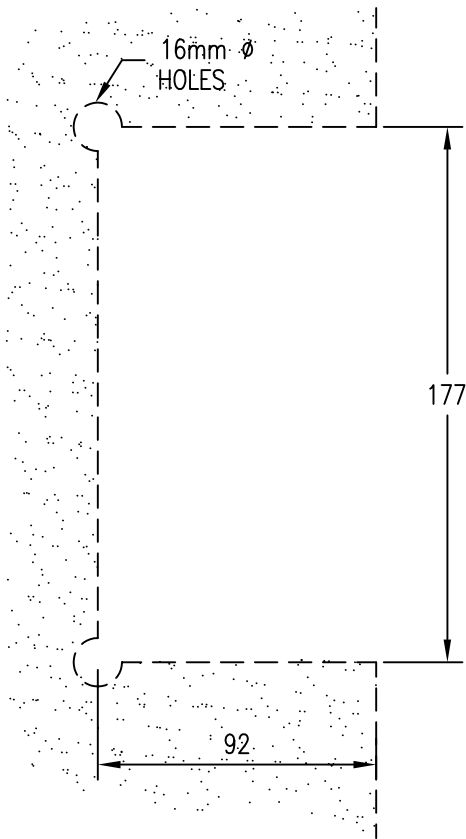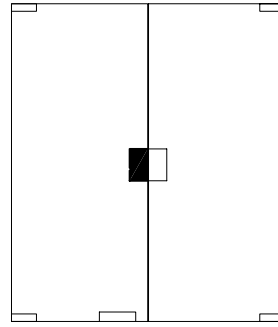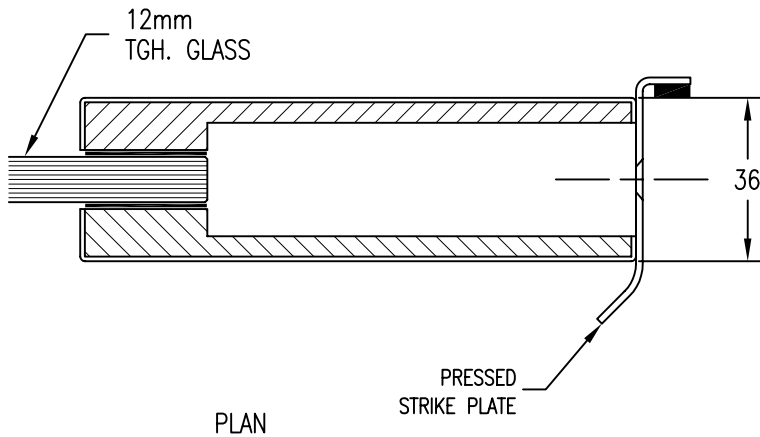

GLASS PREPARATION



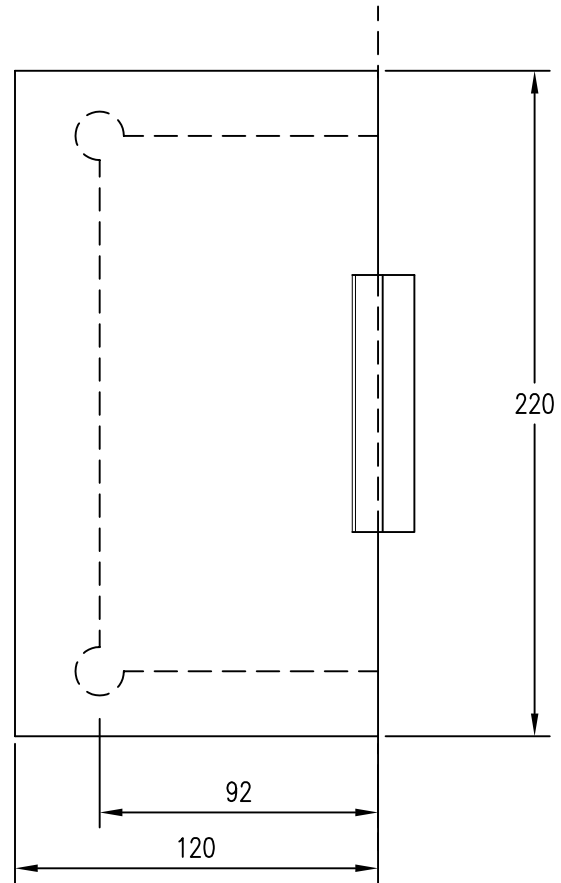


ELEVATION


CD1050K SPECIFICATION: ON-EAZI Side Fix Patch Keeper to suit CD1050, CD1050E and CD1050F with Door Lock (DORMA 9601 or 9602).
Note: This Patch fitting is used generally on pairs of doors to match Patch Lock.
Specify glass thickness 10,12 or 15mm

FINISHES:

ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

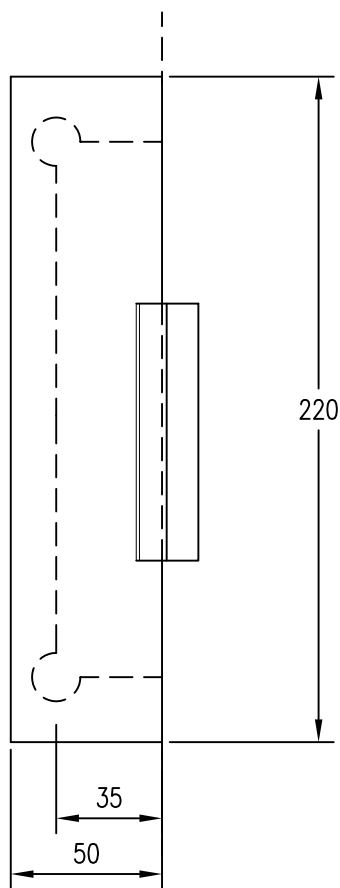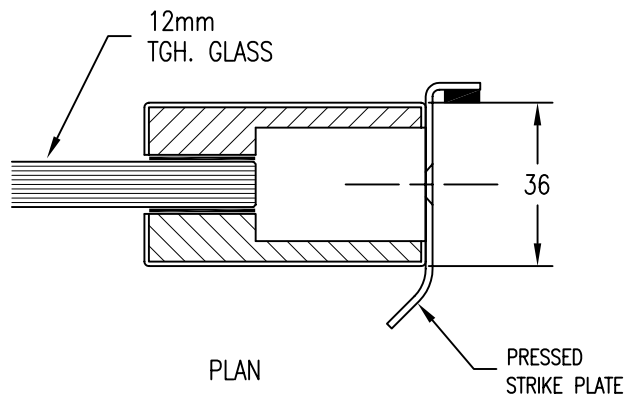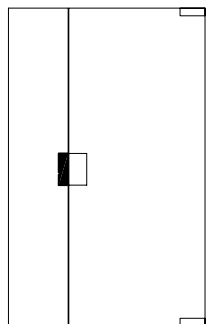

ELEVATION




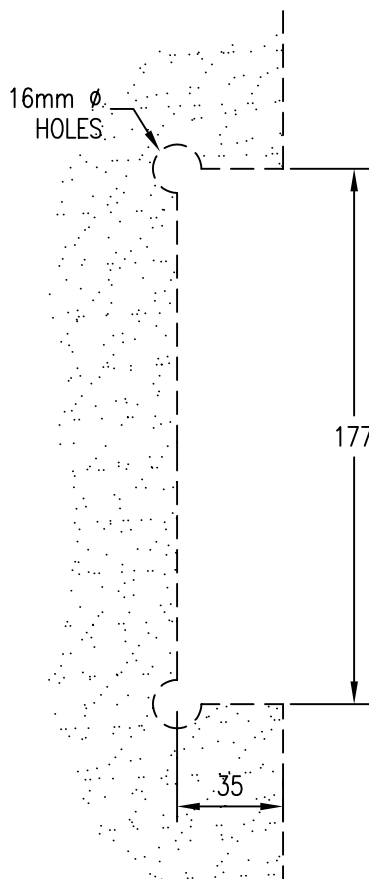


GLASS PREPARATION

CD1051K SPECIFICATION: ON-EAZI Side Fix Patch Keeper to suit CD1050, CD1050E and CD1050F with Door Lock (9601 or 9602).
Note: This Patch fitting is used generally on side panels.
Specify glass thickness 10,12 or 15mm

FINISHES:

ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

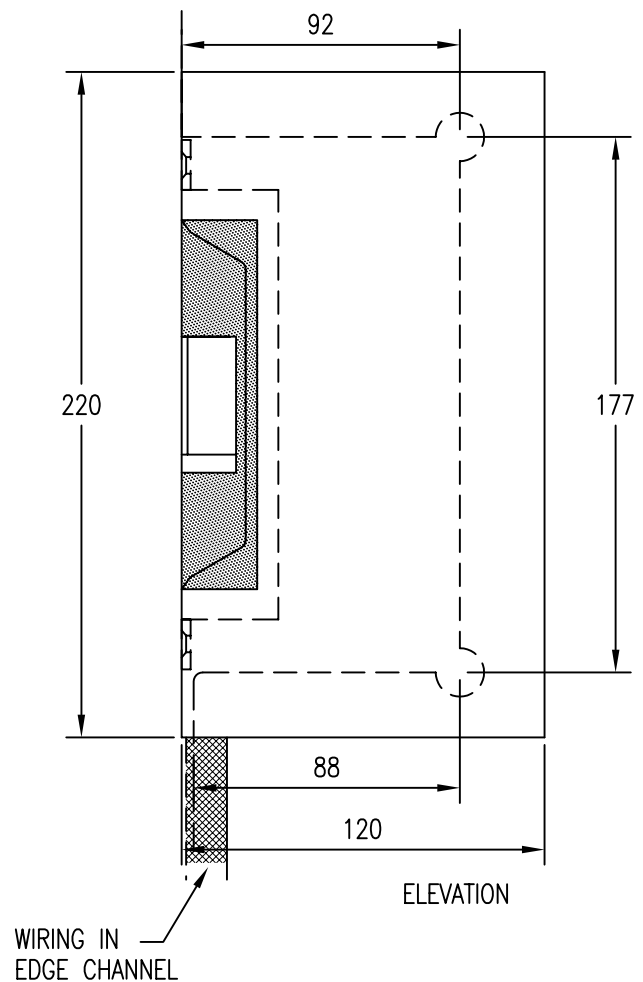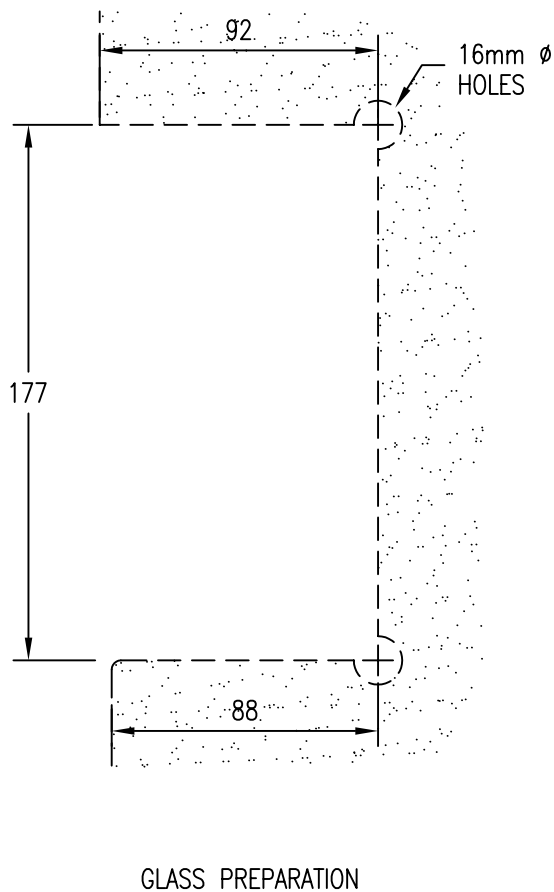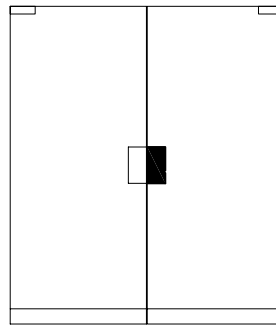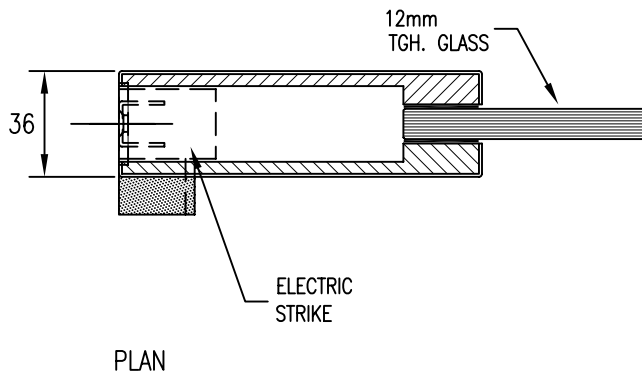

CD1050KE SPECIFICATION: ON-EAZI Side Fix Electric Strike Patch Keeper to suit CD1050, CD1050E and CD1050F, incorporating ES2000 Electric Strike.

Note: Wiring possibilities include surface pipe, edge channel or horizontal silicone joint.





Note: Wiring by edge channel indicated on drawing.

Specify glass thickness 10,12 or 15mm

Specify Hand of Door.

FINISHES:

ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

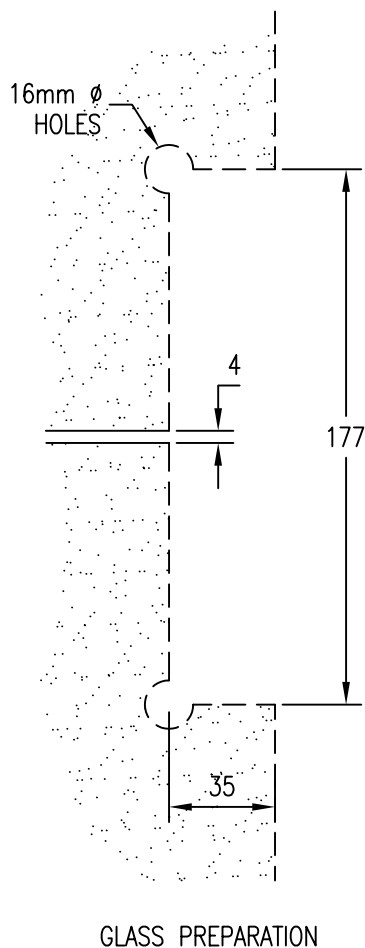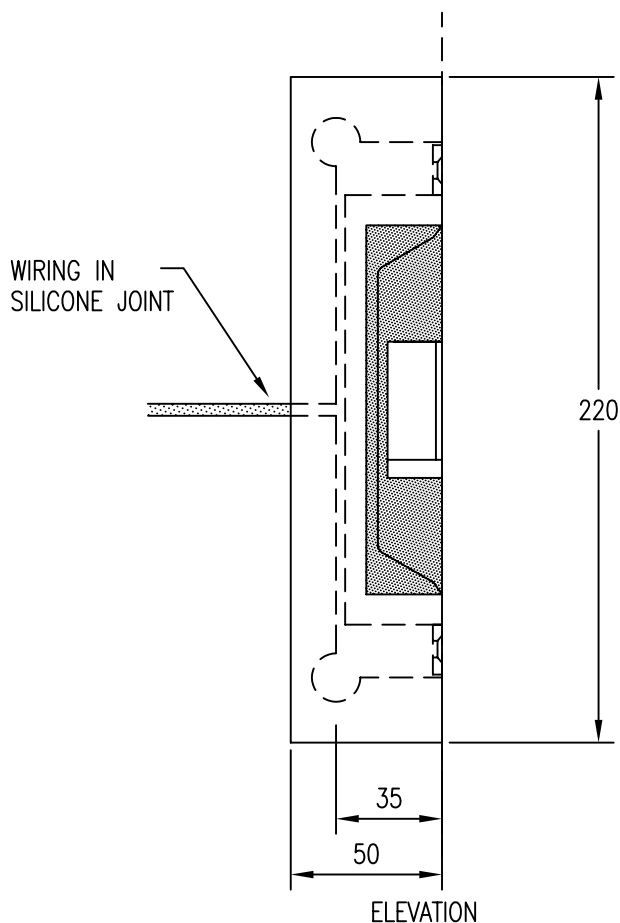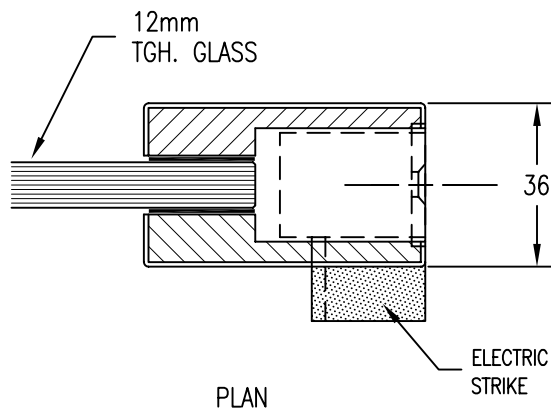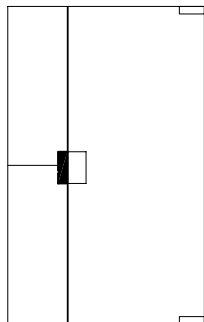

CD1051KE SPECIFICATION: ON-EAZI Side Fix Electric Strike Patch Keeper to suit CD1050, CD1050E and CD1050F, incorporating ES2000 Electric Strike.

Note: Wiring possibilities include surface pipe, edge channel or horizontal silicone joint.





Note: Wiring in silicone joint indicated on drawing.

Specify glass thickness 10,12 or 15mm


Specify Hand of Door

FINISHES:

ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

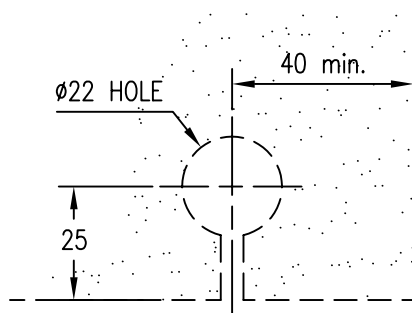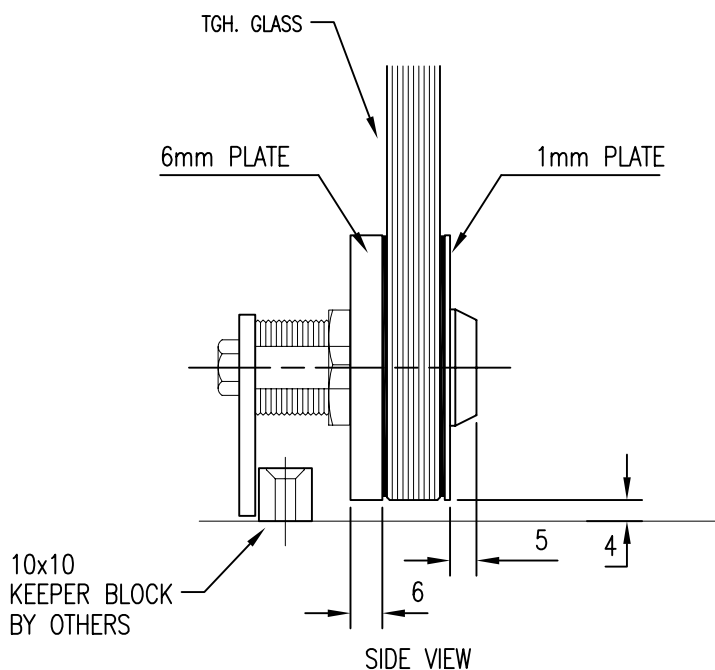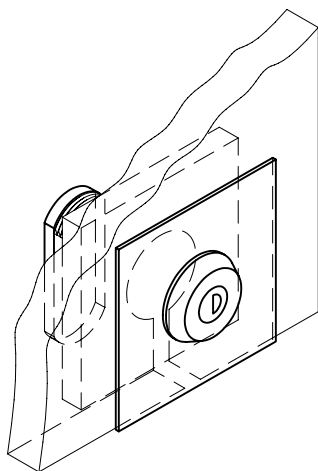




GLASS
PREPARATION

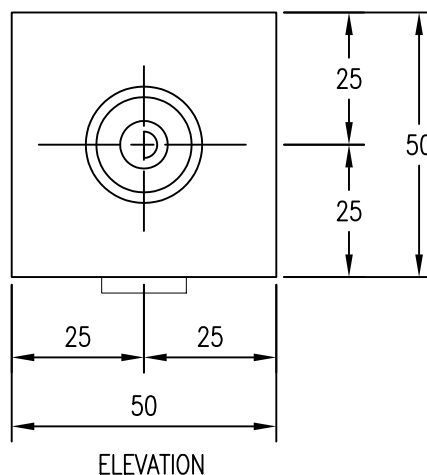



CD45 SPECIFICATION: ON-EAZI Cam Lock Patch Fitting
for Showcase Locking.
Key operation from one side only.
Specify glass thickness 6,8, or 10mm.

FINISHES:


ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

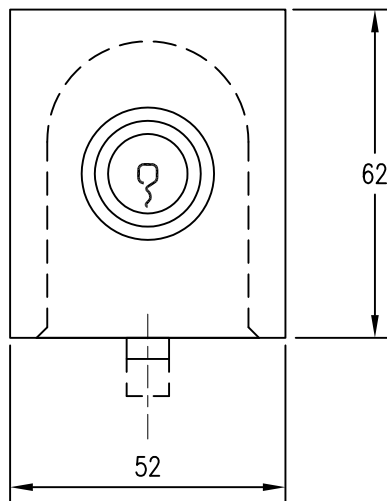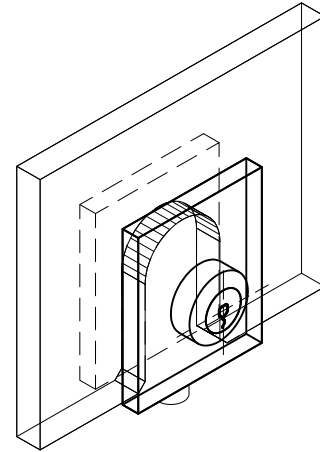

ELEVATION

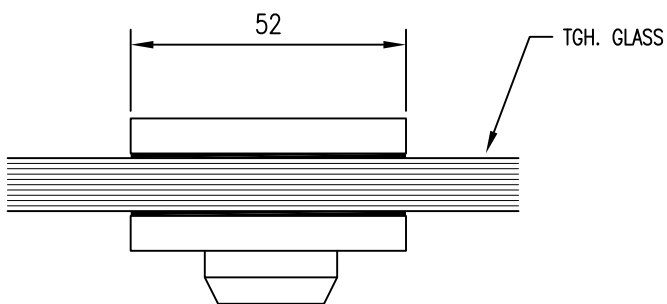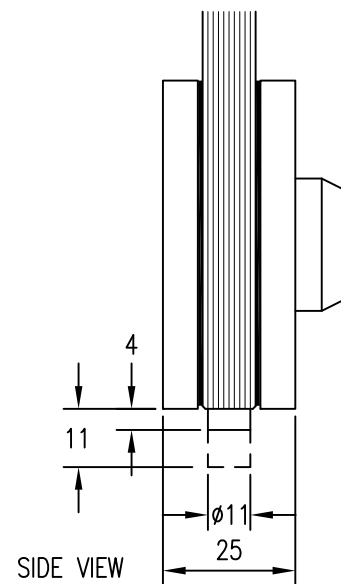






PLAN

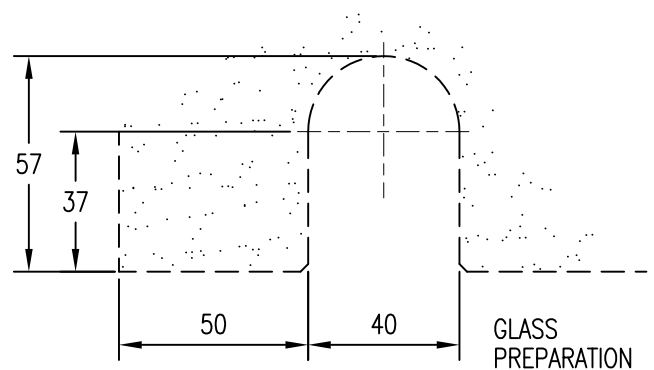

CD49 SPECIFICATION: ON-EAZI Euro Type Mini Patch Lock for Showcase or Small Door Locking.
Key Operation from one side only.
Specify Glass Thickness 8 or 10mm.
Note: Add CD60-A Floor Keeper if required.

FINISHES:

ALUMINIUM	BRASS	STAINLESS
SAA	CP	SSS

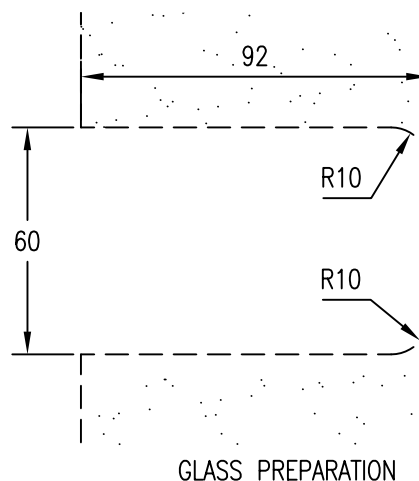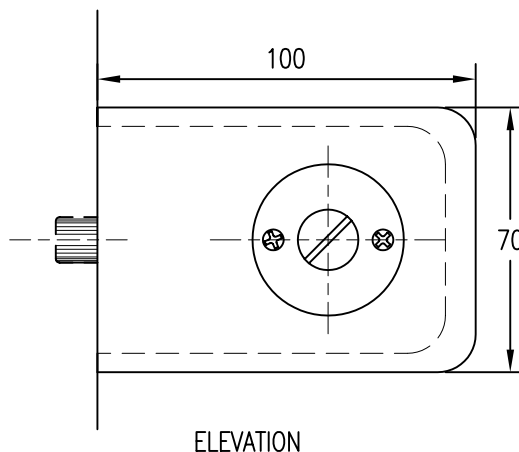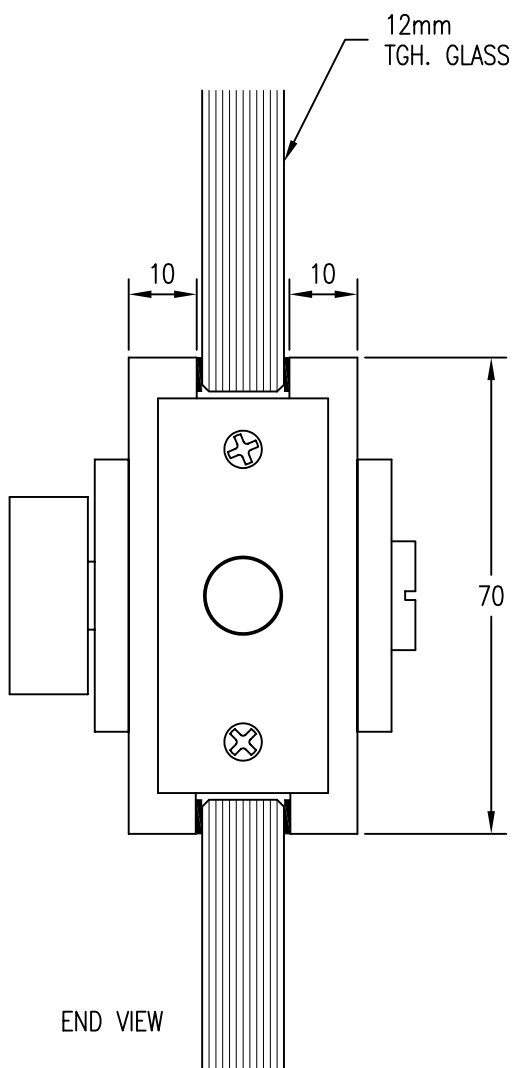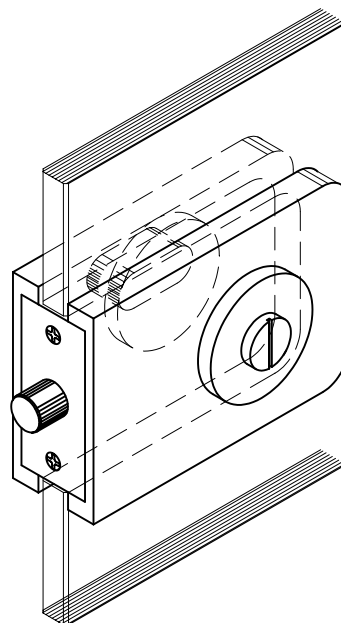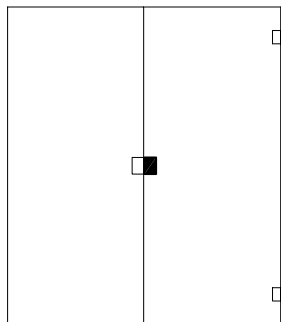

CD56TP SPECIFICATION: ON-EAZI Toilet Door Centre Patch Lock with Privacy Bolt Set.
Specify glass thickness 8,10,12 or 15mm.
Note: Add CD56TPK matching Patch Keeper if required.

FINISHES:

BRASS

STAINLESS




PBU

SSS


CP

PSS


SCP

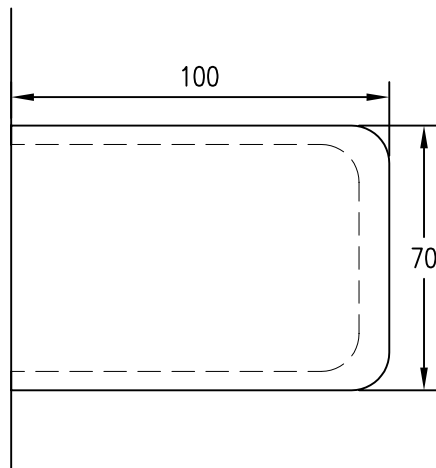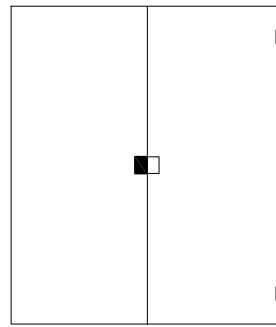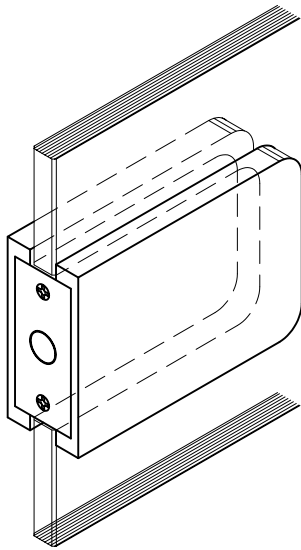

ELEVATION

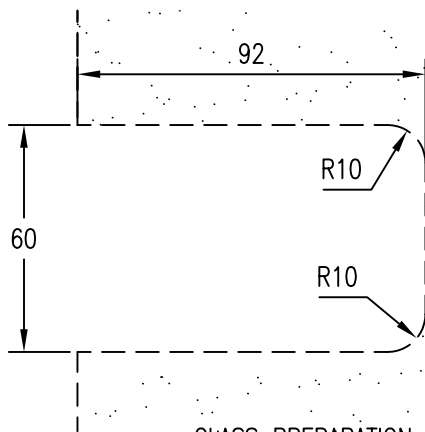

GLASS PREPARATION




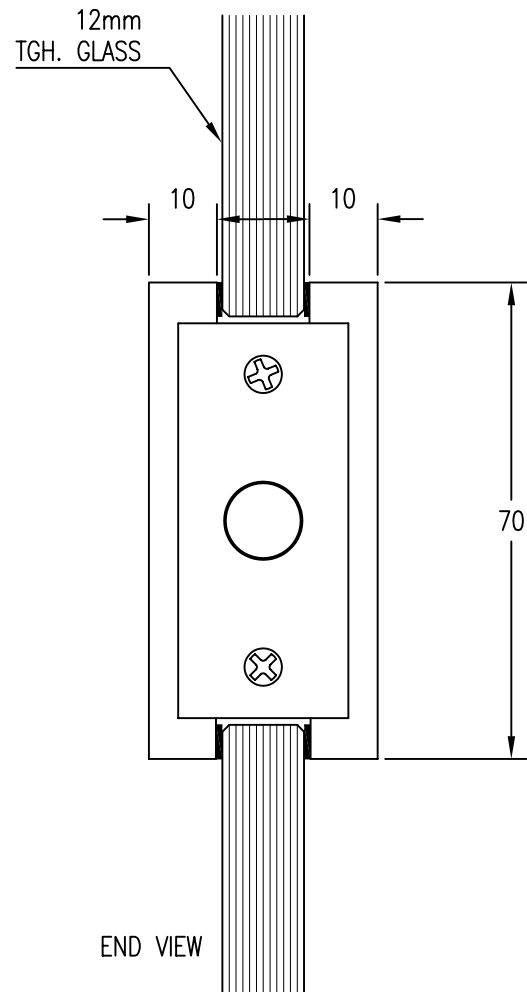


END VIEW

CD56TPK SPECIFICATION: ON-EAZI Toilet Door Centre Patch Lock Keeper.
Specify glass thickness 8,10, or 12mm.
Note: CD56TP matching Patch Lock.

FINISHES:





BRASS	STAINLESS
PBU	SSS
CP	PSS
SCP	

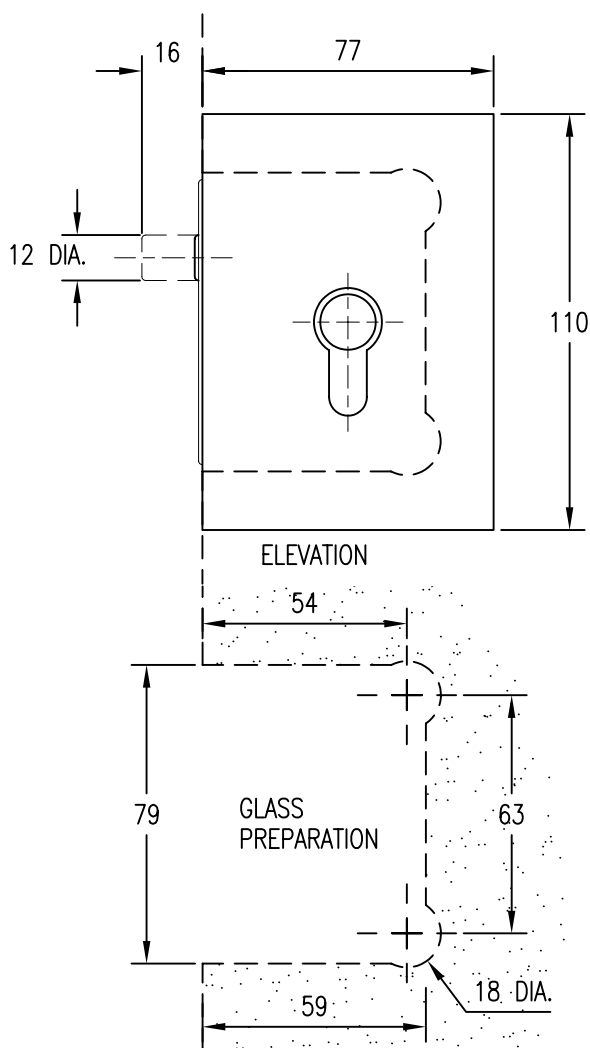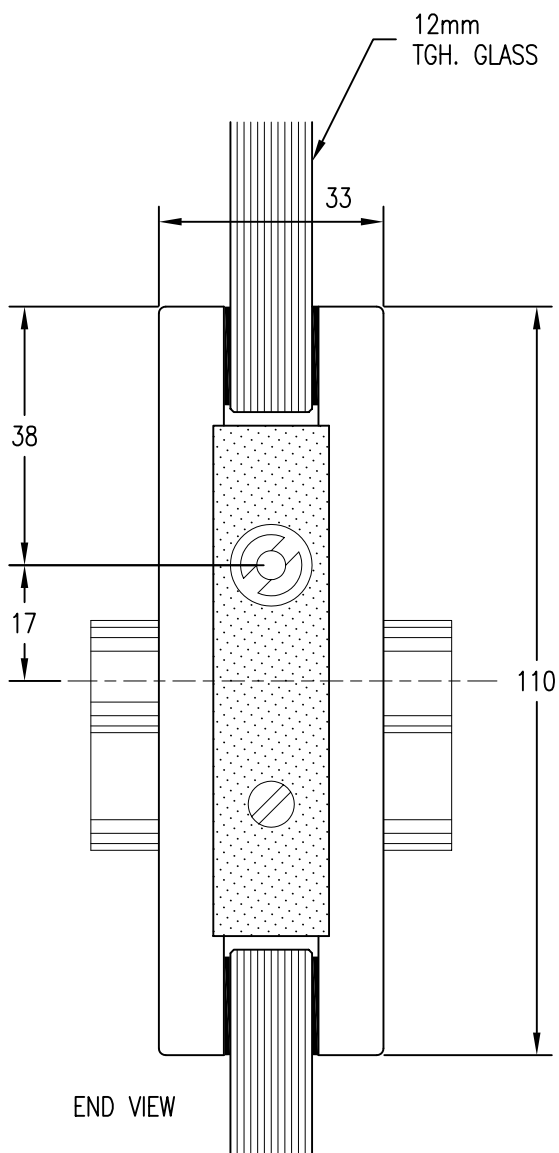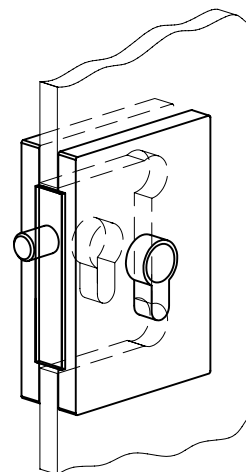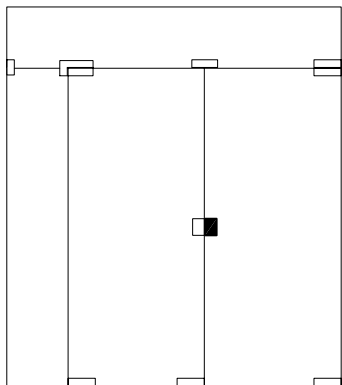

CD56 SPECIFICATION: ON-EAZI Euro Type Centre Patch Lock for tenancy small Door Locking.
Specify Lock operation optional single cylinder, double cylinder or cylinder and turn.
Specify glass thickness 8,10,12 or 15mm.
Note: Add CD61 Wall Keeper or CD65 matching Patch Keeper if required.
Note: Optional cylinder CD68.
Note: Specify Hand of Door for Single Cylinder.

FINISHES:


ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

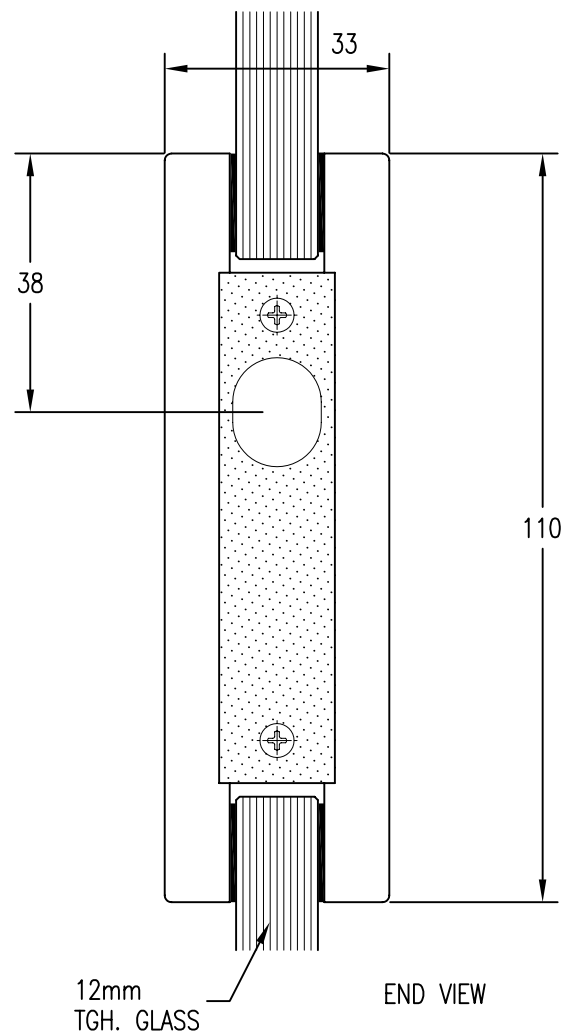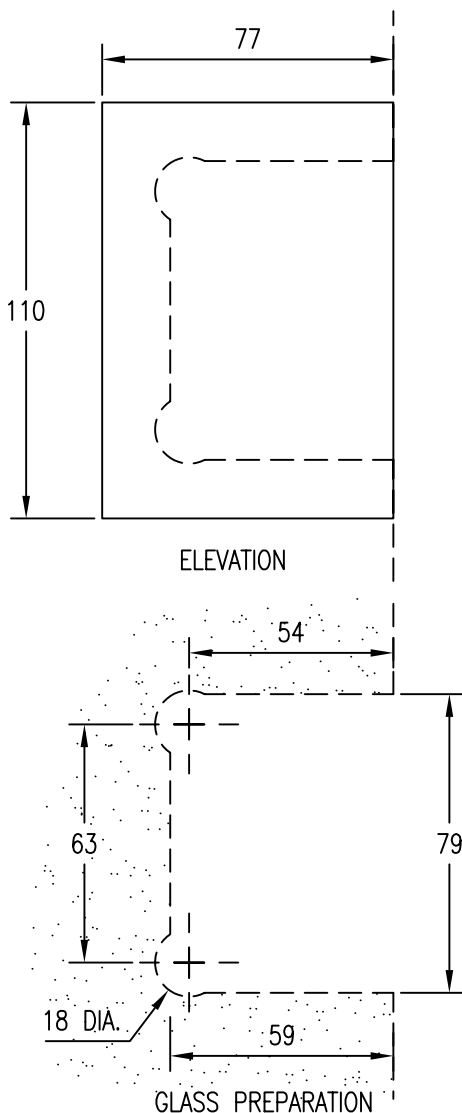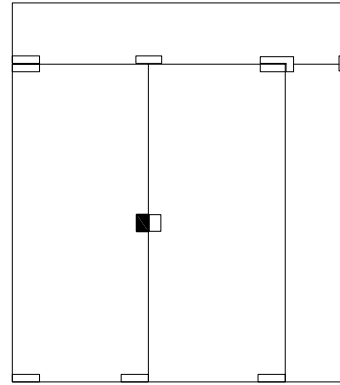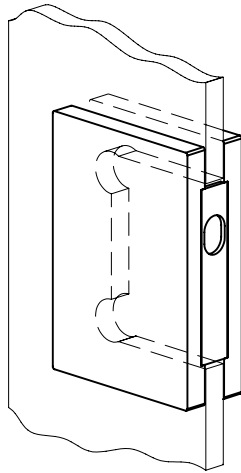


CD65 SPECIFICATION: ON-EAZI Euro Type Centre Patch Keeper for CD56 tenancy small Door Locking.
Specify glass thickness 8,10,12 or 15mm.

FINISHES:


ALUMINIUM	BRASS	STAINLESS
MILL	PBU	SSS
SAA	CP	PSS
S/F	SCP	
P/S/F		

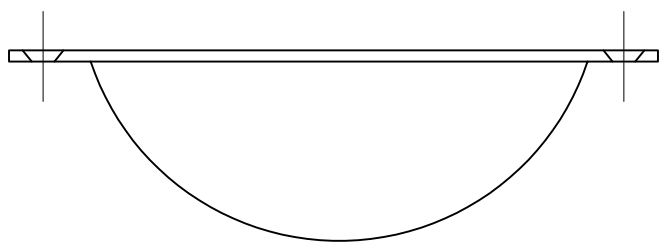

SIDE VIEW

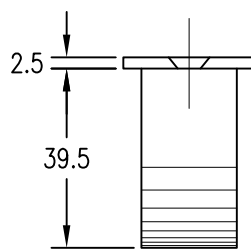



END VIEW

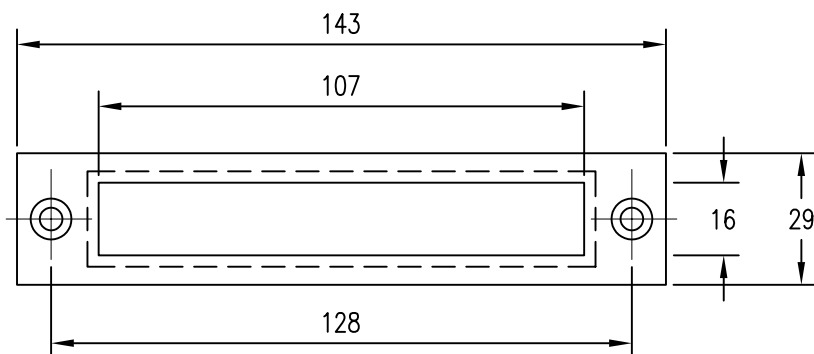

CD353



LOCK TROUGH

PLAN

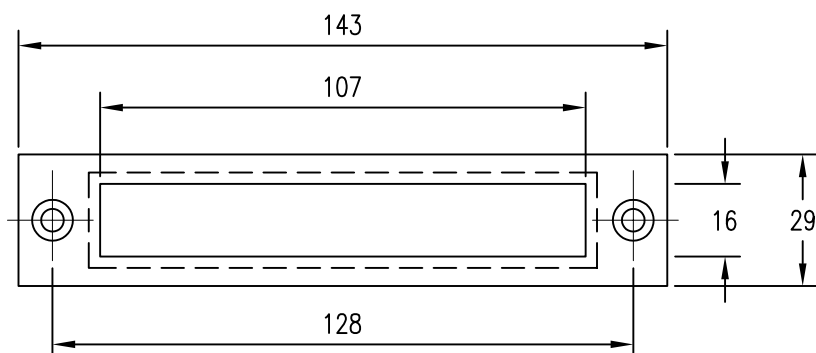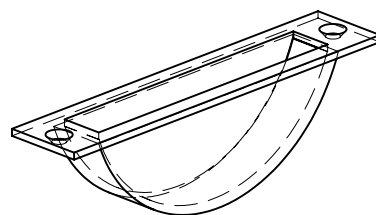

CD353C

PLAN, FOR SWING DOOR

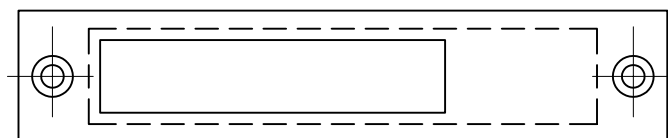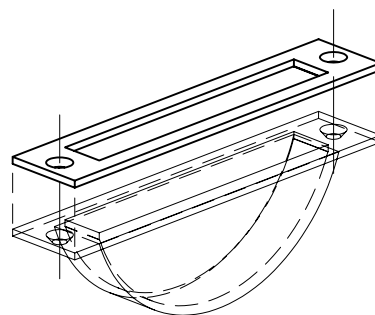

CD353C/S

PLAN, FOR SLIDING DOOR

CD353 SPECIFICATION: Cast Lock Trough Floor Keeper to suit DC 590 Long Throw Dead Lock, Finished in SCP.


CD353C SPECIFICATION: Lock Trough Cover Plate to provide special finishes for CD353 Lock Trough or to provide Restricted Trough Opening for Sliding Door Applications.

FINISHES:

BRASS	STAINLESS
PBU	SSS
CP	PSS
SCP	


CD60

TOP HAT KEEPER

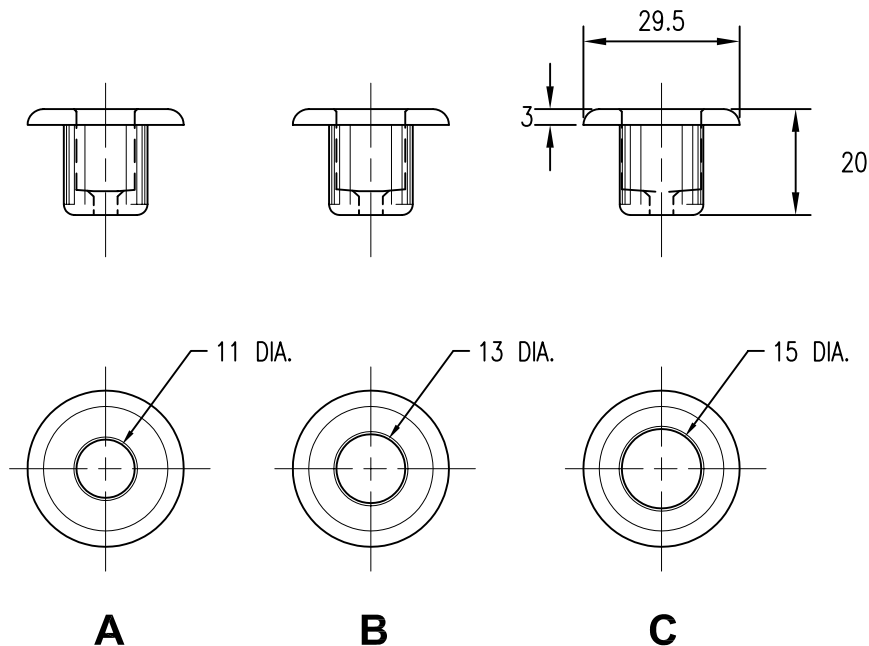


CD60S

TOP HAT KEEPER
WITH DUST COVER

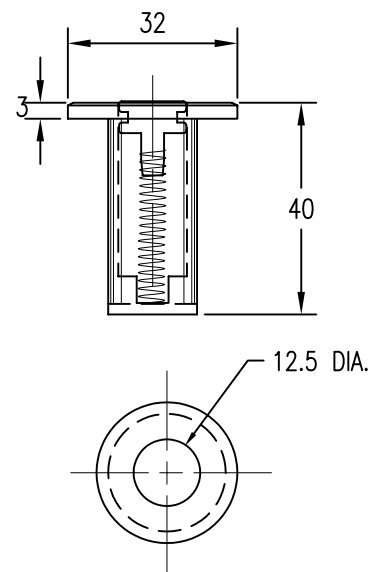


M05.193

TOP HAT KEEPER WITH
SPRING LOADED COVER

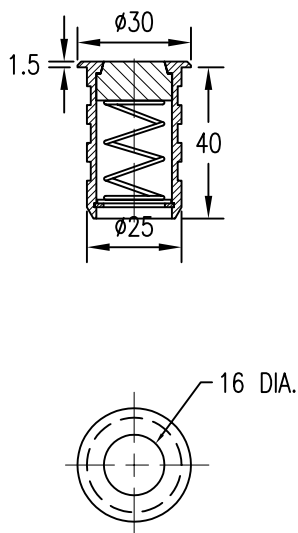


M05.194

UNIVERSAL ECCENTRIC
BUSH KEEPER

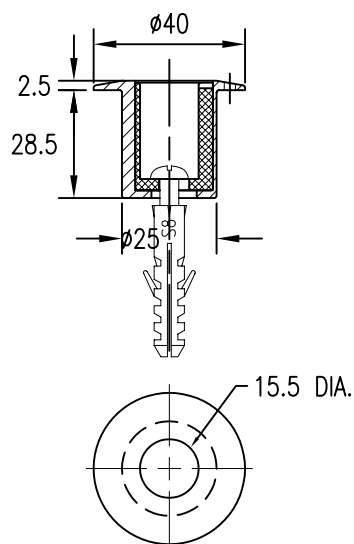

345

KEEPER PLATE

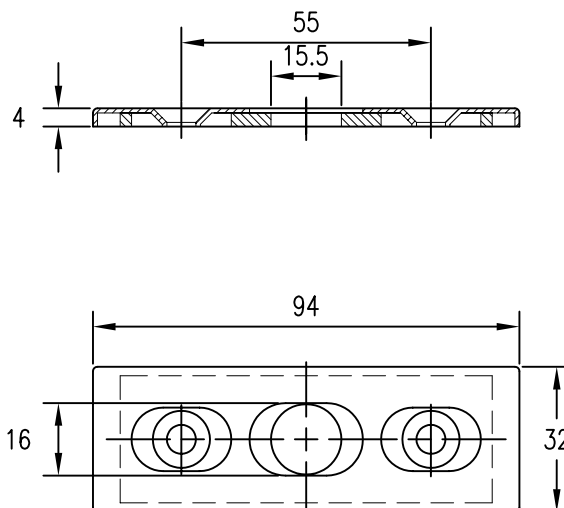

FINISHES:

CD60

ALUMINIUM BRASS

MILL
SAA
S/F
P/S/F

CD60S

BRASS

PBU
CP
SCP

M05.193

ALUMINIUM

SAA

M05.194

S/STEEL

SSS

345

S/STEEL

SSS