

HAVEN

TIMBER FLOORING

European timber flooring offering an extra-matte finish and a range of profiles, crafted for unlimited possibilities.

PRODUCT DETAILS

COLLECTION	Haven
PRODUCT TYPE	Engineered Plank
AVAILABILITY	Stocked
TOTAL THICKNESS	14mm
WIDTH	190mm
LENGTH	1900mm
% OF SHORTS	20%
WEAR LAYER	3mm Solid European Oak
CORE	Eucalyptus Plywood
CONSTRUCTION	Multilayer Engineered
RE-SANDS	Up to 2 (approx. 1mm removed per re-sand)
SURFACE TEXTURE	Lightly Brushed
SURFACE SHEEN	Matte 4-7%
BEVEL	Micro Bevel 4 Sides
STATUS	Prefinished
FINISH	UV Cured PureMatte Lacquer
SPECIES	European Oak
WOOD GRADE	Feature
FILLER COLOUR	Colour Dependent

STRUCTURAL WARRANTY

25 YEAR RESIDENTIAL	For terms and conditions see www.forte.co.nz/warranties
10 YEAR COMMERCIAL	

SUSTAINABILITY

SUSTAINABILITY	Sustainably Sourced
----------------	---------------------



INSTALLATION

INSTALLATION METHOD	Glue down only (Double stick for multi-level)
SUITABLE SUBSTRATES	Plywood, Particle Board, Concrete, existing timber - enquire for others
JOINT PROFILE	Tongue & Groove (4 Sides)
SUITABLE APPLICATIONS	Floors, walls and ceilings
SUITABLE USES	Residential and Commercial projects
UNDERFLOOR HEATING	Hydronic systems Electric systems set in screed (ensure screed suitable for UFH) - enquire for others
WET AREA SUITABILITY	Contact the Forté team for information


TECHNICAL SPECIFICATION

REACTION TO FIRE	Floors: Critical Flux 5.7kw/m ² Walls & Ceiling: Group 2-S / Class Cfl-s1
WEAR LAYER DENSITY	650kg/m ³
FORMALDEHYDE EMISSION	E1, Low VOC, no added formaldehyde
SLIP RATING (WET)	AS/NZS 4586 Wet Test Classification X (Medium) 41 BPN
SLIP RATING (DRY)	AS/NZS 4586 Dry Test Classification F, Mean COF 0.75

PACK INFORMATION

PACK SIZE	1.805 m ²
PIECES PER PACK	4 full planks + 1 split board (20% shorts)
PACK WEIGHT	17kg

HAVEN PROFILE

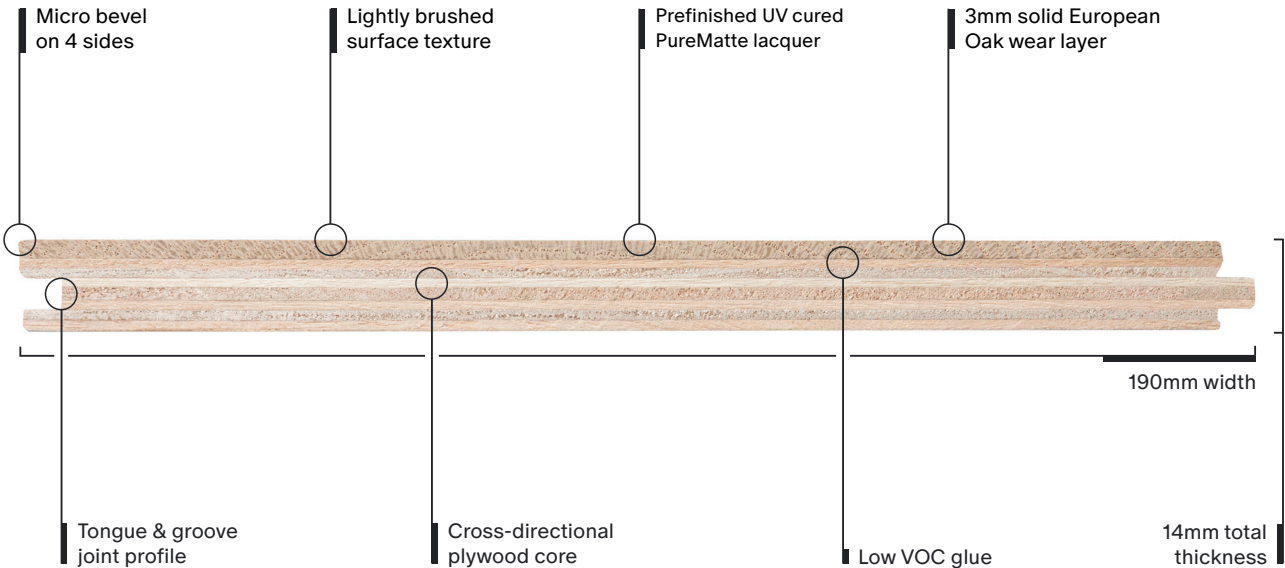

HAVEN FEATURE GRADE

Haven feature grade timber offers a more expressive display of natural character. Larger knots, some visible cracks, and colour and grain variation bring a sense of warmth and texture to any space. This grade celebrates the timber's natural beauty, making it perfect for adding a statement of organic charm. Features like knots and cracks may be filled with coloured wood filler to create a balanced, polished appearance.



HAVEN

TIMBER FLOORING

European timber flooring offering an extra-matte finish and a range of profiles, crafted for unlimited possibilities.

PRODUCT DETAILS

COLLECTION	Haven
PRODUCT TYPE	Engineered Plank
AVAILABILITY	Custom Order
TOTAL THICKNESS	14mm
WIDTH	120mm
LENGTH	600mm
WEAR LAYER	3mm Solid European Oak
CORE	Eucalyptus Plywood
CONSTRUCTION	Multilayer Engineered
RE-SANDS	Up to 2 (approx. 1mm removed per re-sand)
SURFACE TEXTURE	Lightly Brushed
SURFACE SHEEN	Matte 4-7%
BEVEL	Micro Bevel 4 Sides
STATUS	Prefinished
FINISH	UV Cured PureMatte Lacquer
SPECIES	European Oak
WOOD GRADE	Light Feature
FILLER COLOUR	Colour Dependent

STRUCTURAL WARRANTY

25 YEAR RESIDENTIAL	For terms and conditions see www.forte.co.nz/warranties
10 YEAR COMMERCIAL	

SUSTAINABILITY

SUSTAINABILITY	Sustainably Sourced
----------------	---------------------

SPECIFICATION SHEET

[1]



INSTALLATION

INSTALLATION METHOD	Glue down only (Double stick for multi-level)
SUITABLE SUBSTRATES	Plywood, Particle Board, Concrete, existing timber - enquire for others
JOINT PROFILE	Tongue & Groove (4 Sides)
SUITABLE APPLICATIONS	Floors, walls and ceilings
SUITABLE USES	Residential and Commercial projects
UNDERFLOOR HEATING	Hydronic systems Electric systems set in screed (ensure screed suitable for UFH) - enquire for others
WET AREA SUITABILITY	Contact the Forté team for information


TECHNICAL SPECIFICATION

REACTION TO FIRE	Floors: Critical Flux 5.7kw/m ² Walls & Ceiling: Group 2-S / Class Cfl-s1
WEAR LAYER DENSITY	650kg/m ³
FORMALDEHYDE EMISSION	E1, Low VOC, no added formaldehyde
SLIP RATING (WET)	AS/NZS 4586 Wet Test Classification X (Medium) 41 BPN
SLIP RATING (DRY)	AS/NZS 4586 Dry Test Classification F, Mean COF 0.75

PACK INFORMATION

PACK SIZE	0.864 m ²
PIECES PER PACK	6 x Left and 6 x Right
PACK WEIGHT	8.5kg

HAVEN PROFILE

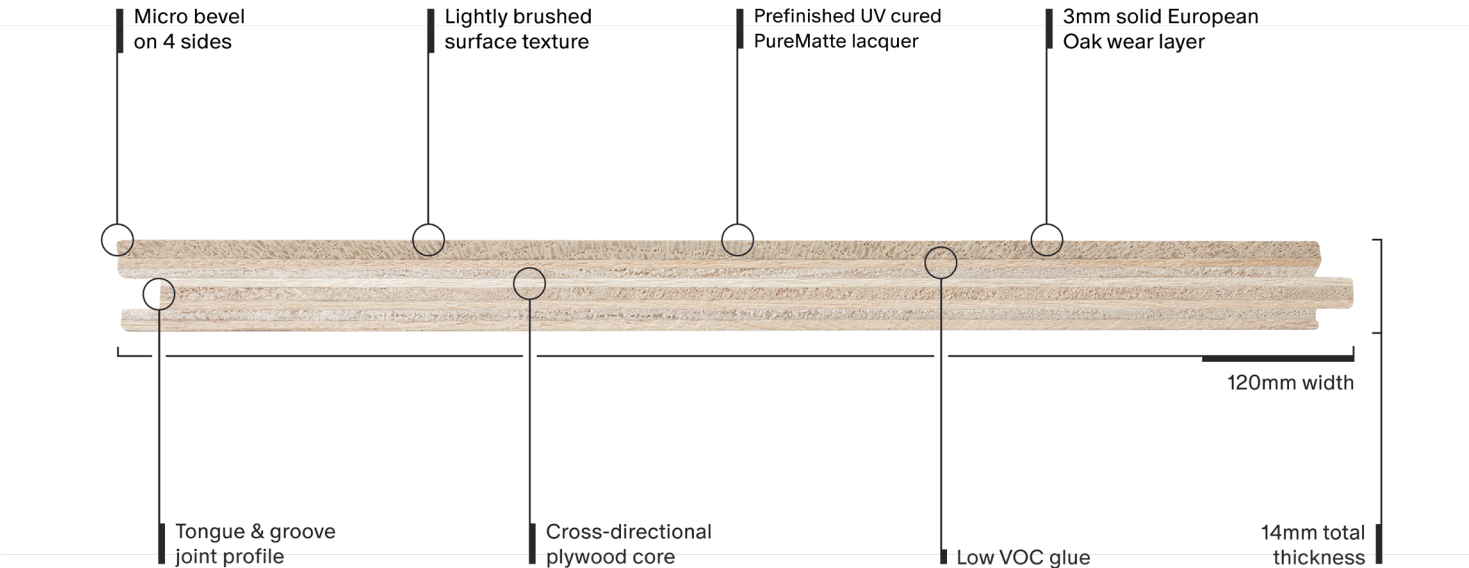

HAVEN LIGHT FEATURE GRADE

Haven light feature grade timber introduces a balance between clean aesthetics and natural character. It showcases small to medium knots, natural colour variation and imperfections, bringing a touch more texture and interest. These features offer an authentic reflection of the timber’s natural origins without dominating the design. Knots and cracks are often filled with coloured wood filler, providing a smooth finish while retaining the timber’s unique charm.



HAVEN

TIMBER FLOORING

European timber flooring offering an extra-matte finish and a range of profiles, crafted for unlimited possibilities.

PRODUCT DETAILS

COLLECTION	Haven
PRODUCT TYPE	Engineered Plank
AVAILABILITY	Custom Order
TOTAL THICKNESS	14mm
WIDTH	120mm
LENGTH	600mm
WEAR LAYER	3mm Solid European Oak
CORE	Eucalyptus Plywood
CONSTRUCTION	Multilayer Engineered
RE-SANDS	Up to 2 (approx. 1mm removed per re-sand)
SURFACE TEXTURE	Lightly Brushed
SURFACE SHEEN	Matte 4-7%
BEVEL	Micro Bevel 4 Sides
STATUS	Prefinished
FINISH	UV Cured PureMatte Lacquer
SPECIES	European Oak
WOOD GRADE	Light Feature
FILLER COLOUR	Colour Dependent

STRUCTURAL WARRANTY

25 YEAR RESIDENTIAL	For terms and conditions see www.forte.co.nz/warranties
10 YEAR COMMERCIAL	

SUSTAINABILITY

SUSTAINABILITY	Sustainably Sourced
----------------	---------------------

SPECIFICATION SHEET

[1]



INSTALLATION

INSTALLATION METHOD	Glue down only (Double stick for multi-level)
SUITABLE SUBSTRATES	Plywood, Particle Board, Concrete, existing timber - enquire for others
JOINT PROFILE	Tongue & Groove (4 Sides)
SUITABLE APPLICATIONS	Floors, walls and ceilings
SUITABLE USES	Residential and Commercial projects
UNDERFLOOR HEATING	Hydronic systems Electric systems set in screed (ensure screed suitable for UFH) - enquire for others
WET AREA SUITABILITY	Contact the Forté team for information


TECHNICAL SPECIFICATION

REACTION TO FIRE	Floors: Critical Flux 5.7kw/m ² Walls & Ceiling: Group 2-S / Class Cfl-s1
WEAR LAYER DENSITY	650kg/m ³
FORMALDEHYDE EMISSION	E1, Low VOC, no added formaldehyde
SLIP RATING (WET)	AS/NZS 4586 Wet Test Classification X (Medium) 41 BPN
SLIP RATING (DRY)	AS/NZS 4586 Dry Test Classification F, Mean COF 0.75

PACK INFORMATION

PACK SIZE	0.864 m ²
PIECES PER PACK	6 x Left and 6 x Right
PACK WEIGHT	8.5kg

HAVEN PROFILE

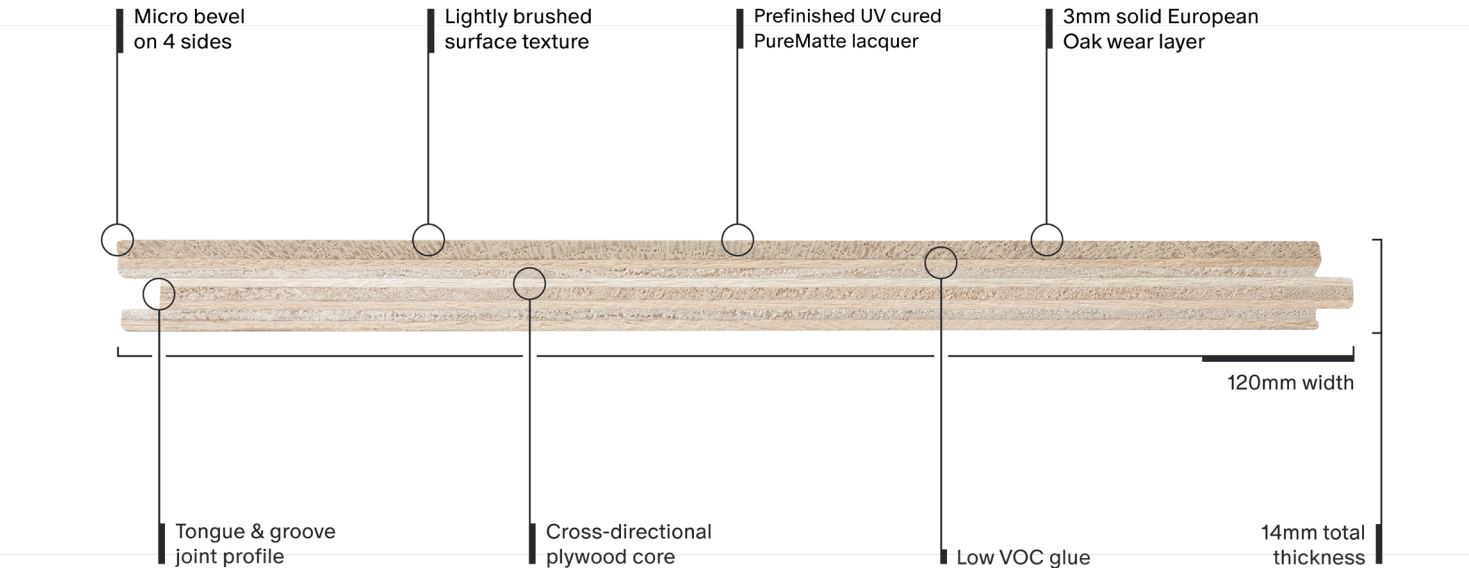

HAVEN LIGHT FEATURE GRADE

Haven light feature grade timber introduces a balance between clean aesthetics and natural character. It showcases small to medium knots, natural colour variation and imperfections, bringing a touch more texture and interest. These features offer an authentic reflection of the timber’s natural origins without dominating the design. Knots and cracks are often filled with coloured wood filler, providing a smooth finish while retaining the timber’s unique charm.



HAVEN

TIMBER FLOORING

European timber flooring offering an extra-matte finish and a range of profiles, crafted for unlimited possibilities.

PRODUCT DETAILS

COLLECTION	Haven
PRODUCT TYPE	Engineered Plank
AVAILABILITY	Stocked
TOTAL THICKNESS	15mm
WIDTH	190mm
LENGTH	2200mm
% OF SHORTS	20%
WEAR LAYER	4mm Solid European Oak
CORE	Eucalyptus Plywood
CONSTRUCTION	Multilayer Engineered
RE-SANDS	Up to 2-3 (approx. 1mm removed per re-sand)
SURFACE TEXTURE	Lightly Brushed
SURFACE SHEEN	Matte 4-7%
BEVEL	Micro Bevel 4 Sides
STATUS	Prefinished
FINISH	UV Cured PureMatte Lacquer
SPECIES	European Oak
WOOD GRADE	Feature
FILLER COLOUR	Colour Dependent

STRUCTURAL WARRANTY

25 YEAR RESIDENTIAL	For terms and conditions see www.forte.co.nz/warranties
10 YEAR COMMERCIAL	

SUSTAINABILITY

SUSTAINABILITY	Sustainably Sourced
----------------	---------------------

SPECIFICATION SHEET

[1]



INSTALLATION

INSTALLATION METHOD	Glue down only (Double stick for multi-level)
SUITABLE SUBSTRATES	Plywood, Particle Board, Concrete, existing timber - enquire for others
JOINT PROFILE	Tongue & Groove (4 Sides)
SUITABLE APPLICATIONS	Floors, walls and ceilings
SUITABLE USES	Residential and Commercial projects
UNDERFLOOR HEATING	Hydronic systems Electric systems set in screed (ensure screed suitable for UFH) - enquire for others
WET AREA SUITABILITY	Contact the Forté team for information


TECHNICAL SPECIFICATION

REACTION TO FIRE	Floors: Critical Flux 5.7kw/m ² Walls & Ceiling: Group 2-S / Class Cfl-s1
WEAR LAYER DENSITY	650kg/m ³
FORMALDEHYDE EMISSION	E1, Low VOC, no added formaldehyde
SLIP RATING (WET)	AS/NZS 4586 Wet Test Classification X (Medium) 41 BPN
SLIP RATING (DRY)	AS/NZS 4586 Dry Test Classification F, Mean COF 0.75

PACK INFORMATION

PACK SIZE	2.09 m ²
PIECES PER PACK	4 full planks + 1 split board (20% shorts)
PACK WEIGHT	21 kg

HAVEN PROFILE

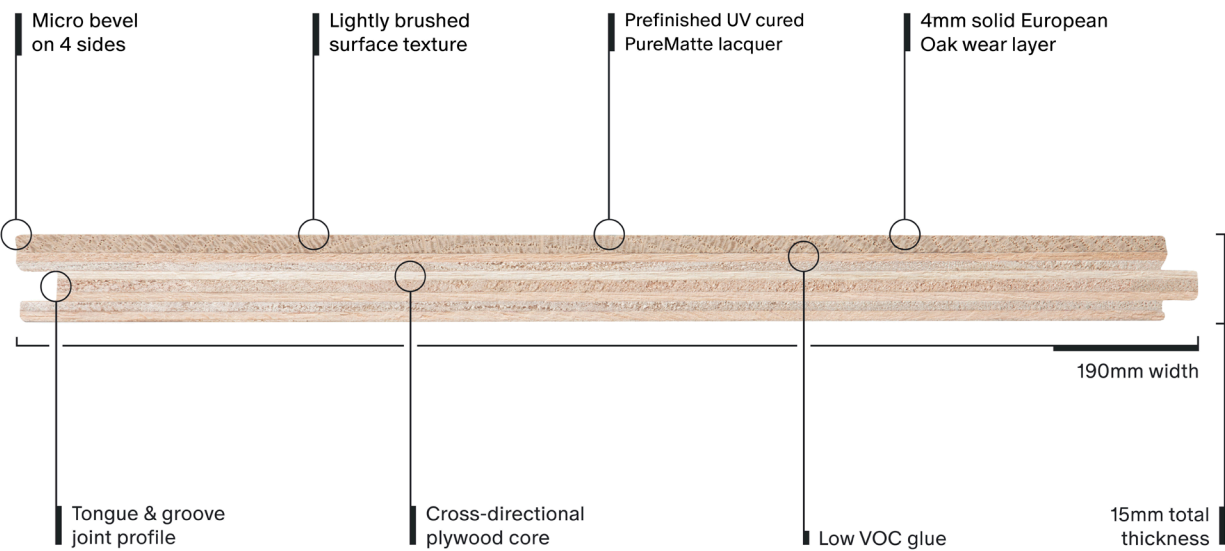

HAVEN FEATURE GRADE

Haven feature grade timber offers a more expressive display of natural character. Larger knots, some visible cracks, and colour and grain variation bring a sense of warmth and texture to any space. This grade celebrates the timber's natural beauty, making it perfect for adding a statement of organic charm. Features like knots and cracks may be filled with coloured wood filler to create a balanced, polished appearance.



HAVEN

TIMBER FLOORING

European timber flooring offering an extra-matte finish and a range of profiles, crafted for unlimited possibilities.

PRODUCT DETAILS

COLLECTION	Haven
PRODUCT TYPE	Engineered Plank
AVAILABILITY	Stocked
TOTAL THICKNESS	21mm
WIDTH	190mm
LENGTH	1900mm
% OF SHORTS	20%
WEAR LAYER	6mm Solid European Oak
CORE	Eucalyptus Plywood
CONSTRUCTION	Multilayer Engineered
RE-SANDS	Up to 4-5 (approx. 1mm removed per re-sand)
SURFACE TEXTURE	Lightly Brushed
SURFACE SHEEN	Matte 4-7%
BEVEL	Micro Bevel 4 Sides
STATUS	Prefinished
FINISH	UV Cured PureMatte Lacquer
SPECIES	European Oak
WOOD GRADE	Feature
FILLER COLOUR	Colour Dependent

STRUCTURAL WARRANTY

25 YEAR RESIDENTIAL	For terms and conditions see www.forte.co.nz/warranties
10 YEAR COMMERCIAL	

SUSTAINABILITY

SUSTAINABILITY	Sustainably Sourced
----------------	---------------------

SPECIFICATION SHEET

[1]



INSTALLATION

INSTALLATION METHOD	Glue down only (Double stick for multi-level)
SUITABLE SUBSTRATES	Plywood, Particle Board, Concrete, existing timber - enquire for others
JOINT PROFILE	Tongue & Groove (4 Sides)
SUITABLE APPLICATIONS	Floors, walls and ceilings
SUITABLE USES	Residential and Commercial projects
UNDERFLOOR HEATING	Hydronic systems Electric systems set in screed (ensure screed suitable for UFH) - enquire for others
WET AREA SUITABILITY	Contact the Forté team for information


TECHNICAL SPECIFICATION

REACTION TO FIRE	Floors: Critical Flux 5.7kw/m ² Walls & Ceiling: Group 2-S / Class Cfl-s1
WEAR LAYER DENSITY	650kg/m ³
FORMALDEHYDE EMISSION	E1, Low VOC, no added formaldehyde
SLIP RATING (WET)	AS/NZS 4586 Wet Test Classification X (Medium) 41 BPN
SLIP RATING (DRY)	AS/NZS 4586 Dry Test Classification F, Mean COF 0.75

PACK INFORMATION

PACK SIZE	1.444 m ²
PIECES PER PACK	4 full planks + 1 split board (20% shorts)
PACK WEIGHT	19.71 kg

HAVEN PROFILE

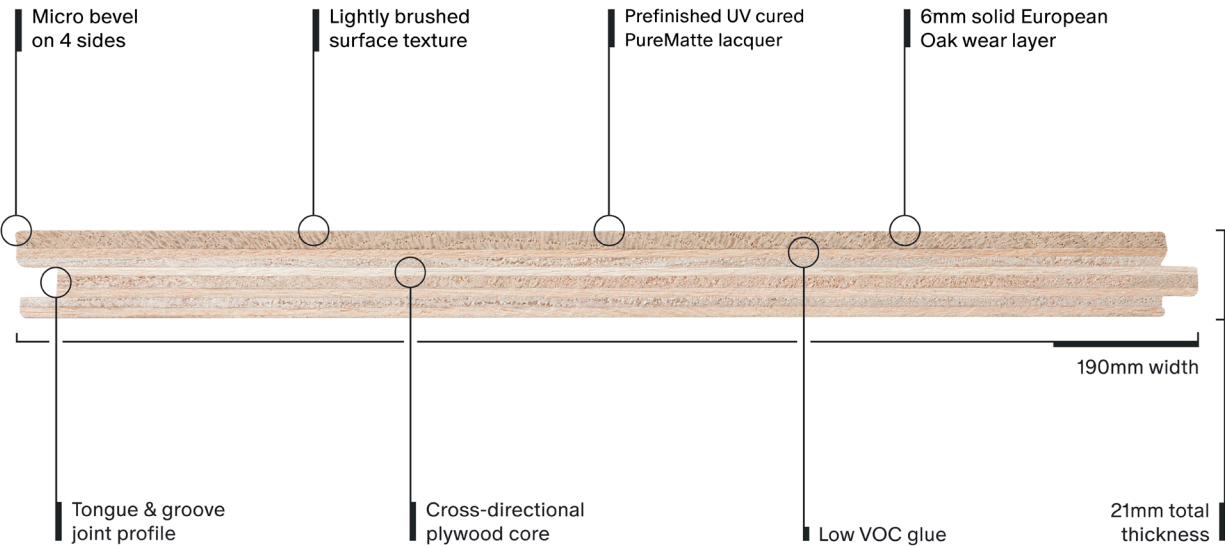

HAVEN FEATURE GRADE

Haven feature grade timber offers a more expressive display of natural character. Larger knots, some visible cracks, and colour and grain variation bring a sense of warmth and texture to any space. This grade celebrates the timber's natural beauty, making it perfect for adding a statement of organic charm. Features like knots and cracks may be filled with coloured wood filler to create a balanced, polished appearance.



CARE & MAINTENANCE

For Residential and Commercial care and maintenance, please visit www.forte.co.nz/advice/timber-wall-and-ceiling-panelling-care-and-maintenance-guide.

STRUCTURAL WARRANTY

Haven 25 Year Residential Structural Warranty

The Haven Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties.

Haven 10 Year Commercial Structural Warranty

The Haven Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties.

INSTALLATION

The Haven Collection must be installed by a trained professional.

Please ensure that you have read and understood the installation guidelines before proceeding to install Haven Timber Flooring.

If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit www.forte.co.nz/installation.