



REV.	DESCRIPTION	DATE	DWG. BY
F.0	ADDED R4 RADIUS & GASKET	08 JULY 2024	JON. Y

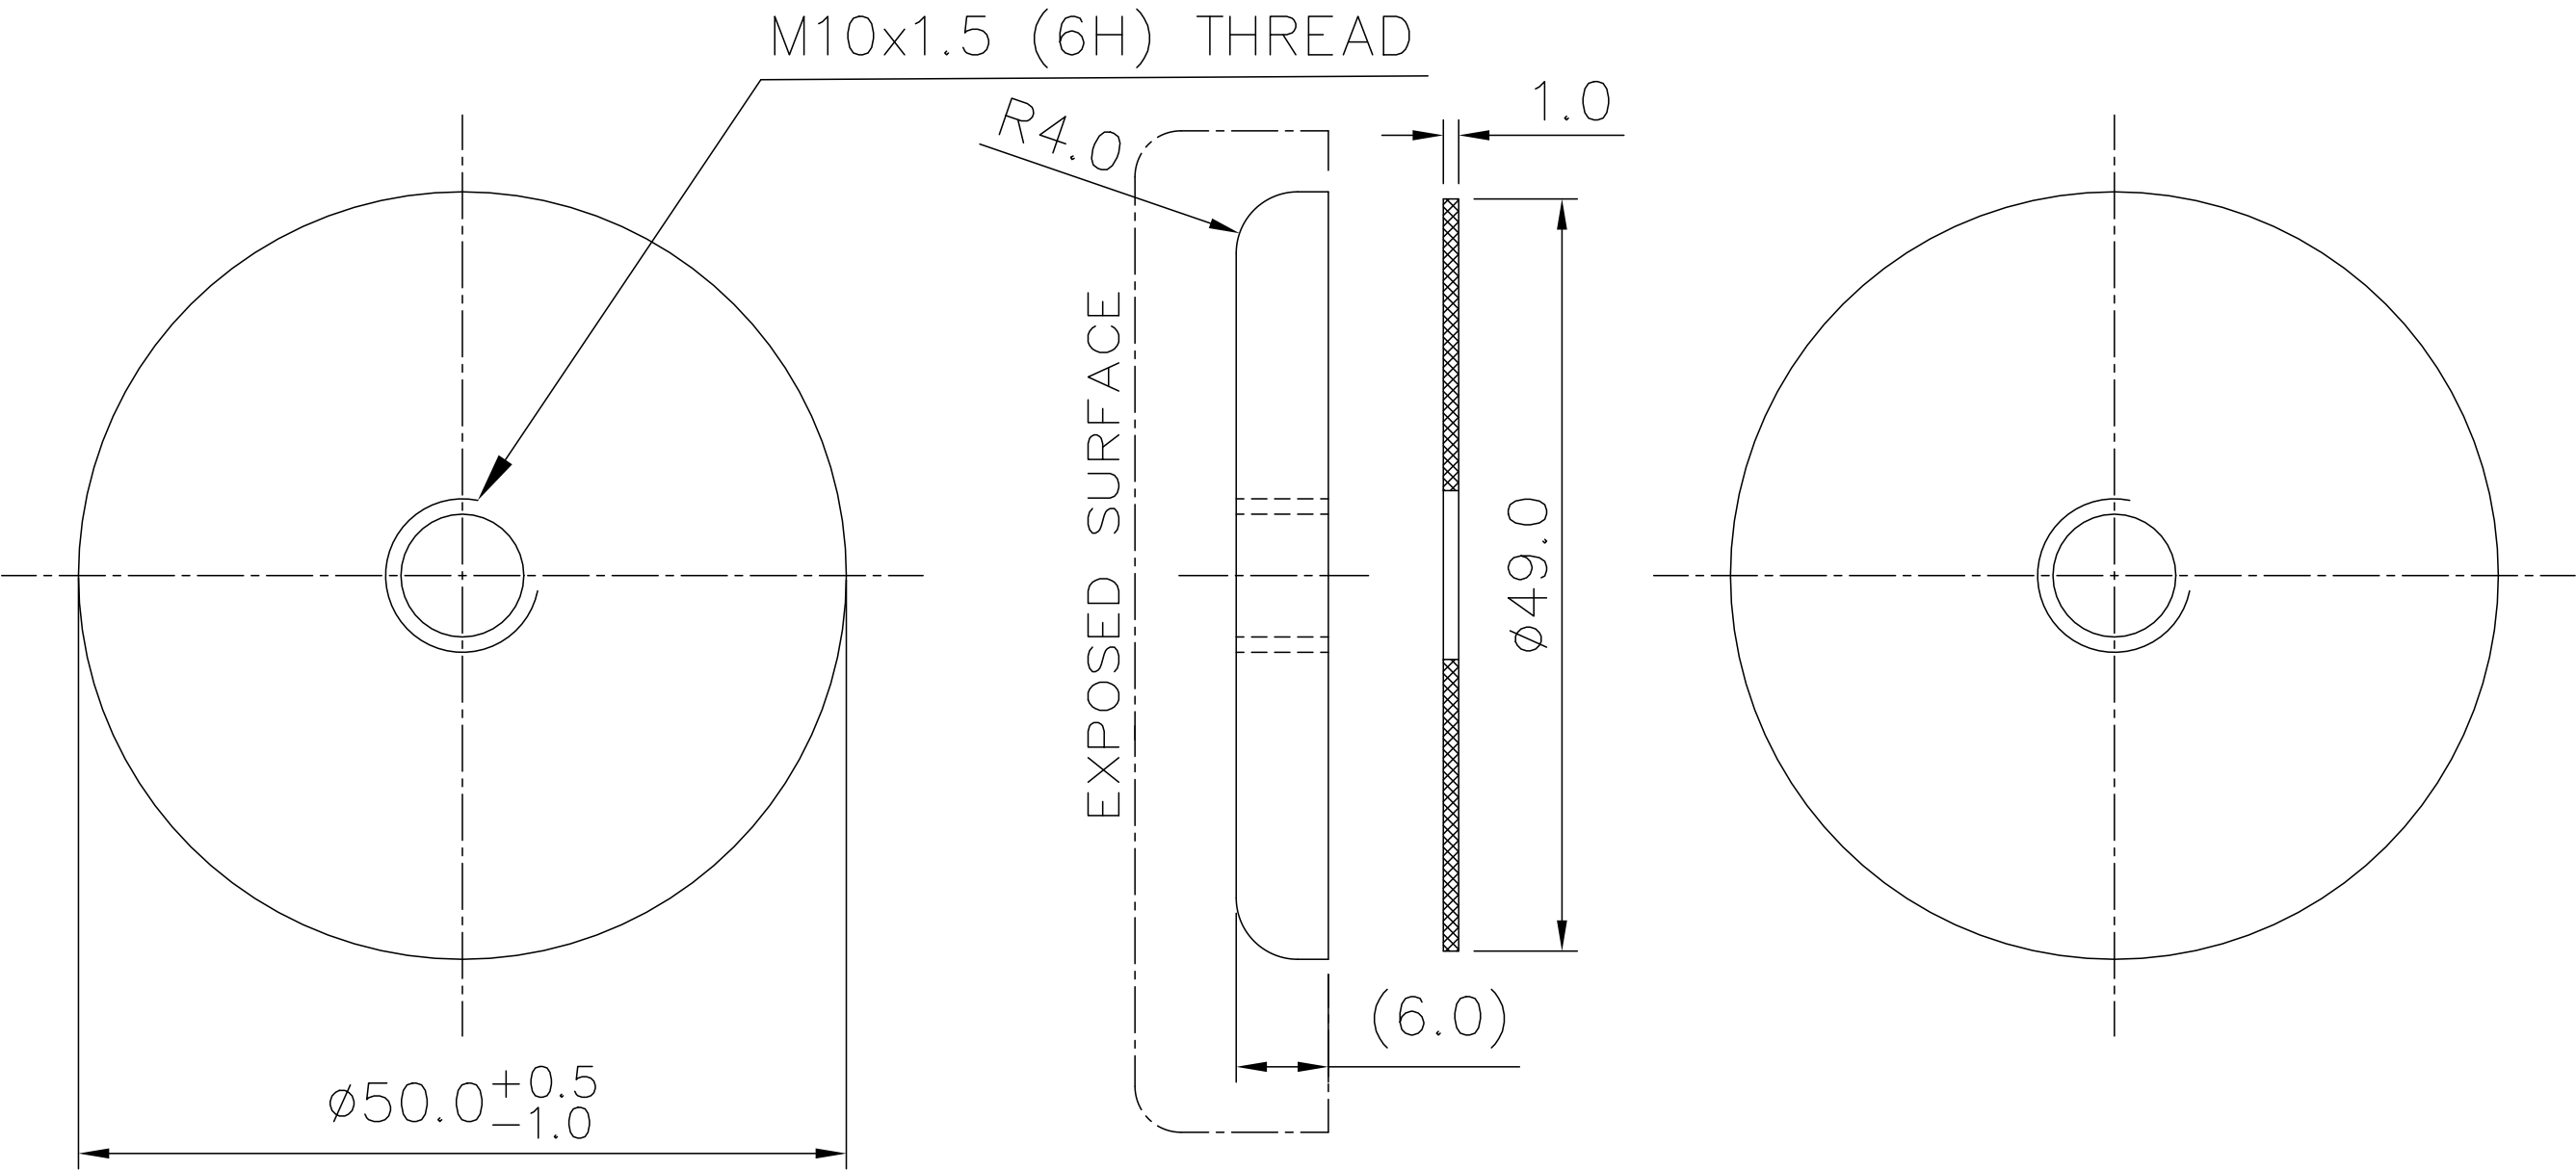

NOTE :

- 1. BREAK ALL SHARP EDGES
- 2. SATIN POLISH ON EXPOSED SURFACE
- 3. $\varnothing 49 \times \varnothing 11 \times 1\text{mm}$ U.V. STABILIZED NYLON 66 GASKET GLUED TO FTG

Note: D50X6THS-01 & AG50/6S-M10 same item. See which item code you would like to retain.

		DRAWING BY : JY	TITLE : 50 DIA.DISC WITH M10 THREAD			
		DATE : 08 JULY 2024				
TOLERANCE		CHECKED BY :	CUSTOMER : OPUS			
<input checked="" type="checkbox"/> 0 ± 0	DATE :					
<input checked="" type="checkbox"/> 0.X ± 0.20	APPROVED BY :	REVISION	MOLD No.	MATERIAL		
<input checked="" type="checkbox"/> 0.XX ±	DATE :	F.0	AG-020	316		
<input checked="" type="checkbox"/> 0.XXX ±	SCALE : N.T.S.	DWG. No. : AG50/6S-M10		REF. No. :		
<input checked="" type="checkbox"/> ANGULAR± 1°						

