

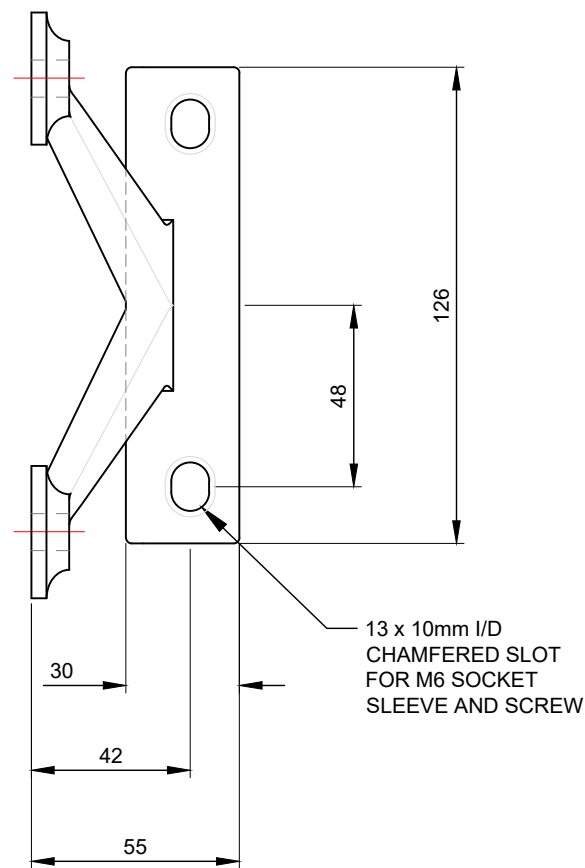


444-4-2 SPIDER

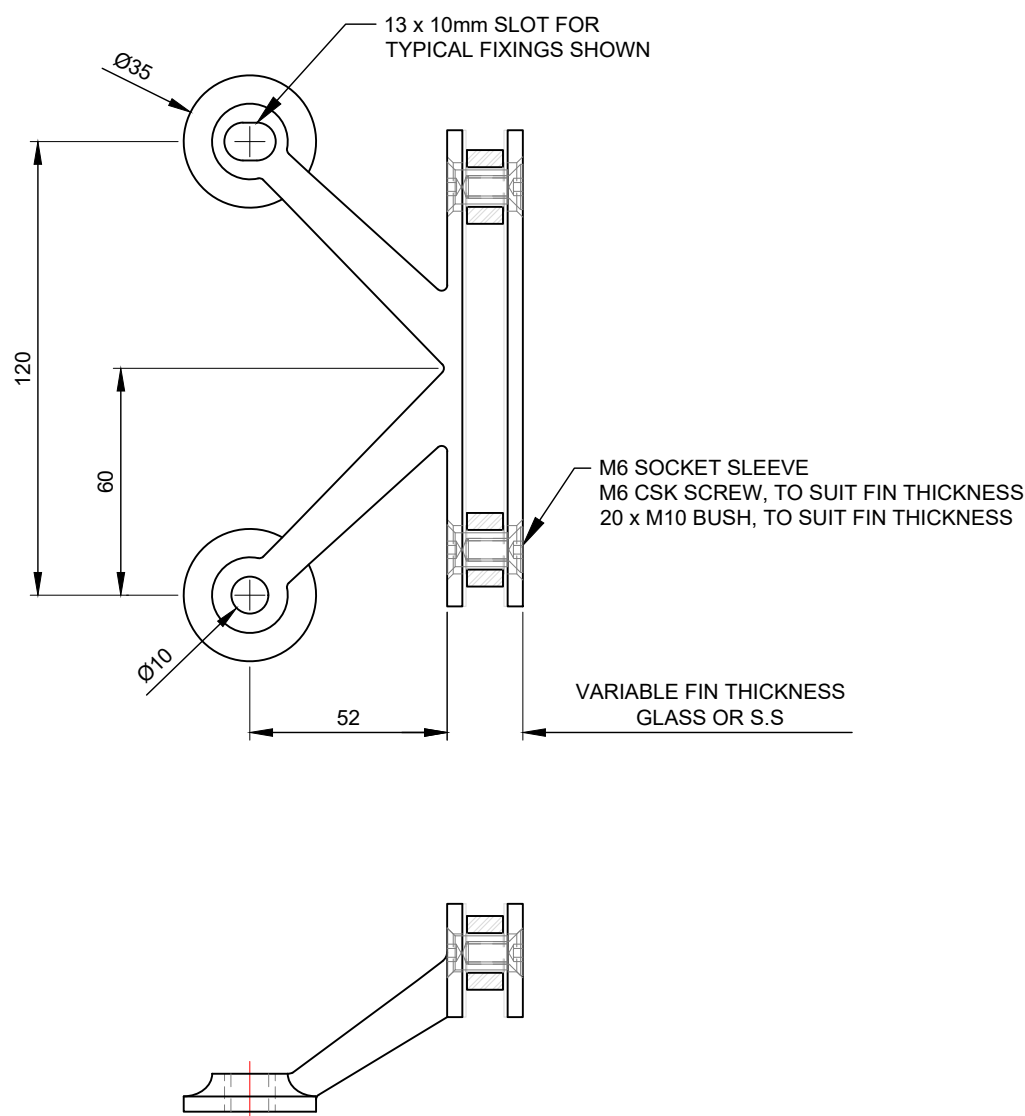


TYPICAL GLASS FIXING OPTIONS:

M8 CSK SCREW & DISC

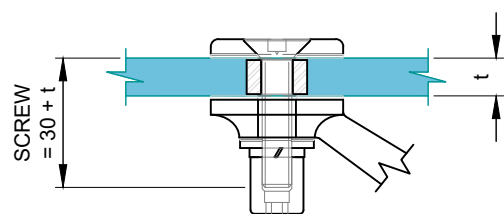



- M8 AGA NUT
- M8 SPRING WASHER
- 20 x 2 x M8 FLAT WASHER
- 20 x 0.8 x M8 FIBRE/PLASTIC GASKET
- 444 SPIDER PALM
- 35 x 0.8 x M8 FIBRE/PLASTIC GASKET
- 14 x 8.5 BUSH, TO SUIT GLASS THICKNESS
- 35 x 0.8 x M8 FIBRE/PLASTIC GASKET
- 35 x 4 x M8 BACKING DISC

M10 CSK SCREW & RADIUS DISC

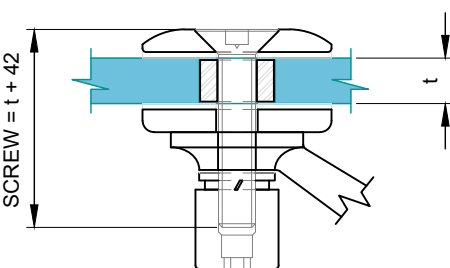

- M10 AGA NUT
- M10 SPRING WASHER
- 20 x 2 x M10 FLAT WASHER
- 20 x 0.8 x M10 FIBRE/PLASTIC GASKET
- 444 SPIDER PALM
- 50 x 6mm DISC
- 50 x 0.8 x M10 FIBRE/PLASTIC GASKET
- 19.5 x 10.5 BUSH SUIT GLASS THICKNESS
- 50 x 0.8 x M10 FIBRE/PLASTIC GASKET
- 50 x 6 x M10 RA DISC

HOLE DETAILS FOR TOUGHENED GLASS:



NOTE: HOLE DETAILS FOR TOUGHENED LAMINATED GLASS ARE PROJECT SPECIFIC.  
CONTACT METRO PERFORMANCE GLASS FOR DETAILS