


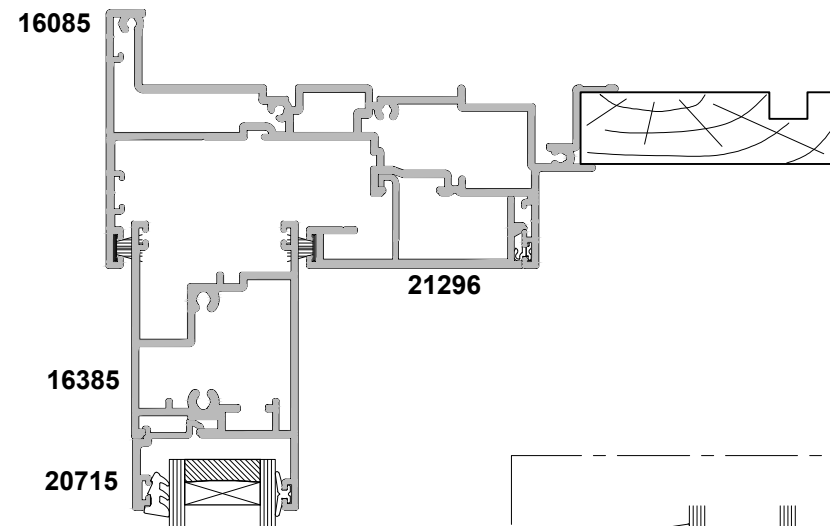

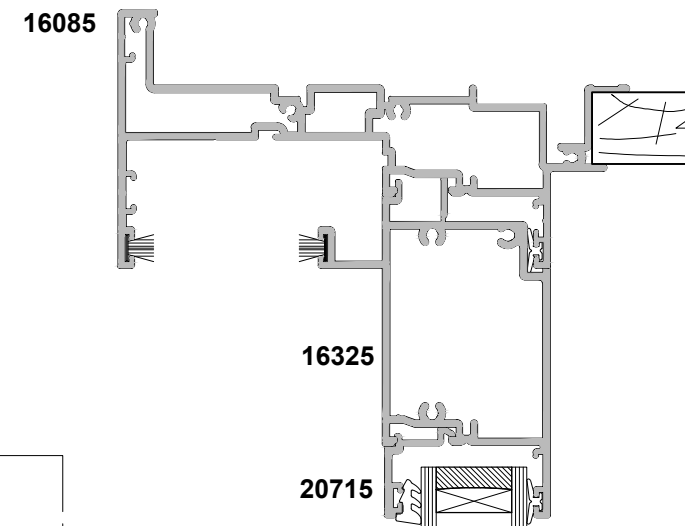


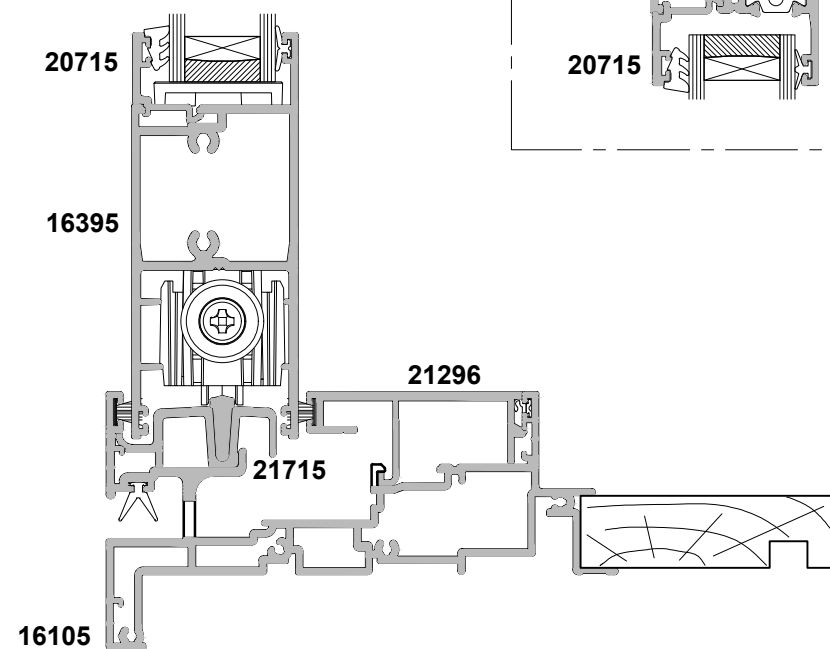


SECTION A-A

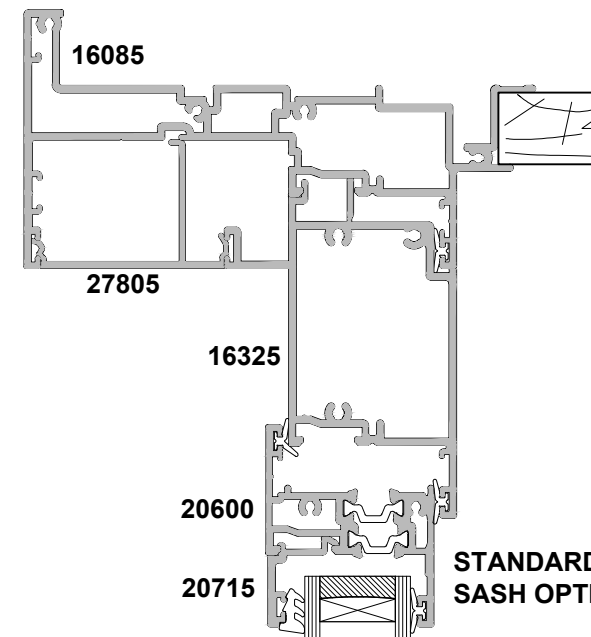




SECTION B-B

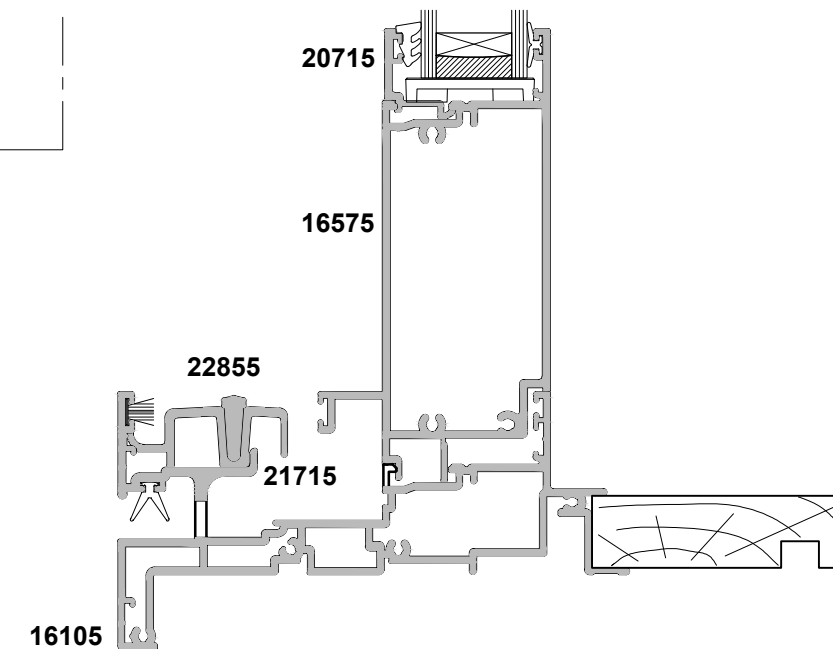


STANDARD
SASH OPTION

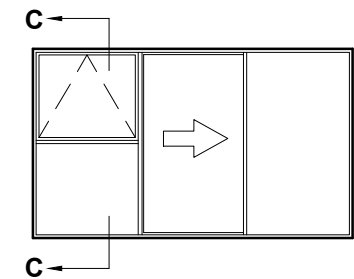


SECTION C-C

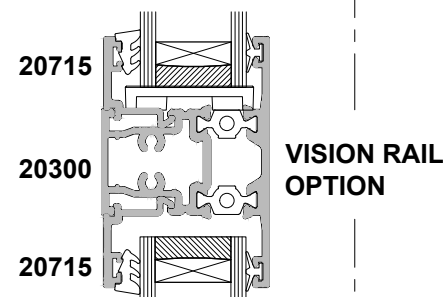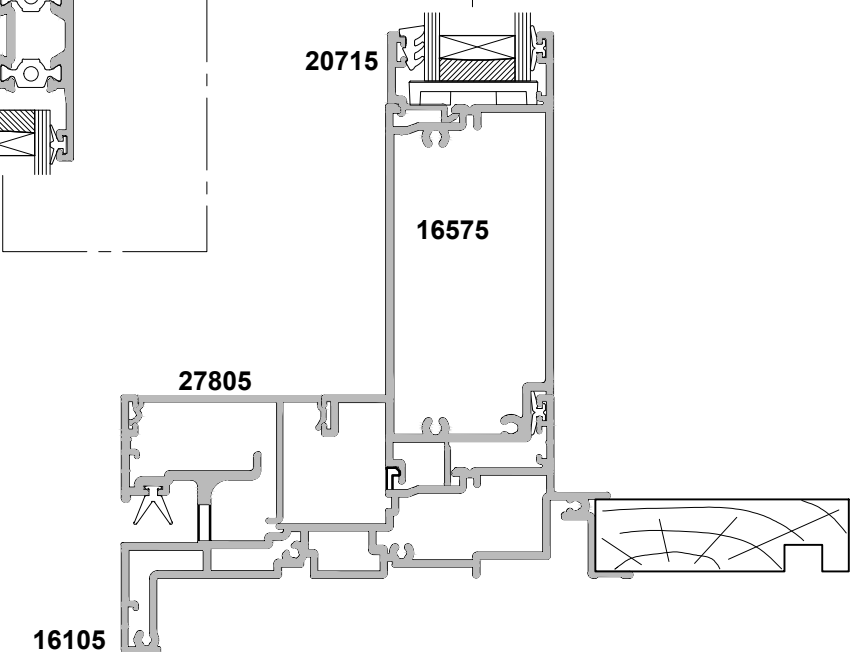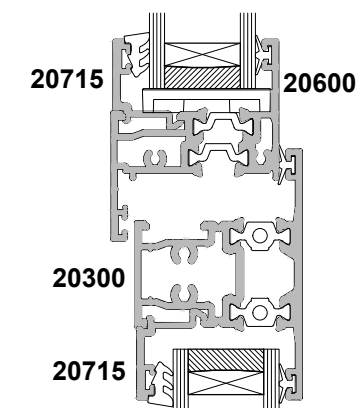


VISION RAIL
OPTION



A





B

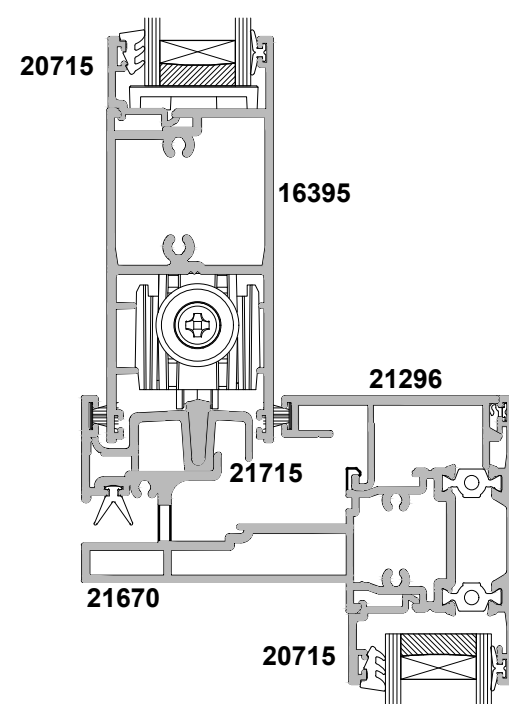


SECTION A-A

UNDERLIGHT TRANSOM

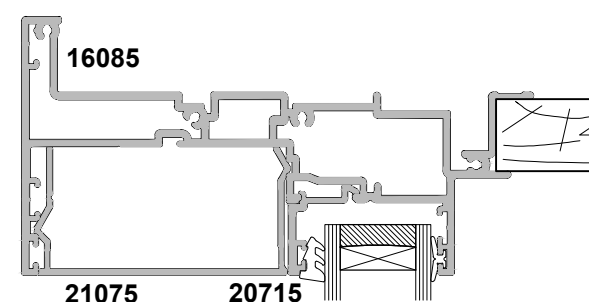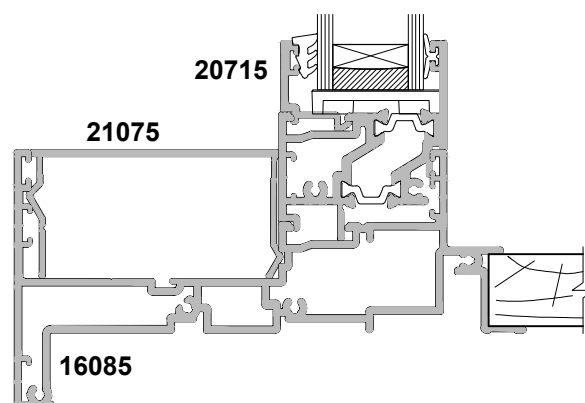


SECTION B-B




OVERLIGHT TRANSOM OPTIONS





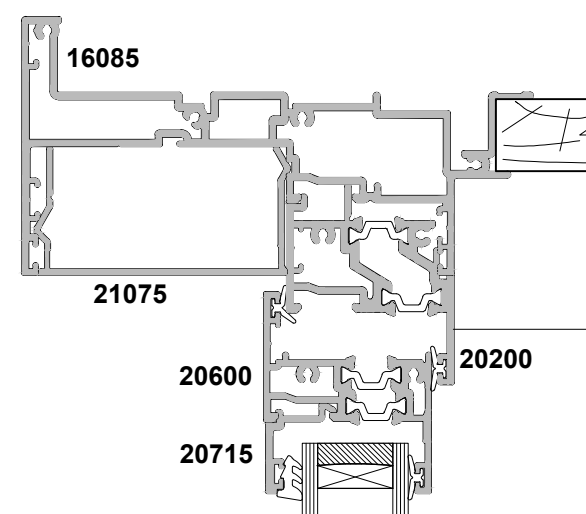


20200 Glazing Adaptor must be added to the jamb when a sash is to be fitted to the sidelight. For fixed glazing the 20200 is optional.

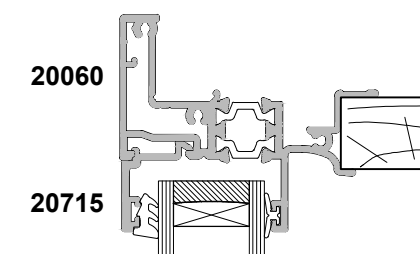

SECTION B-B
COUPLER OPTION

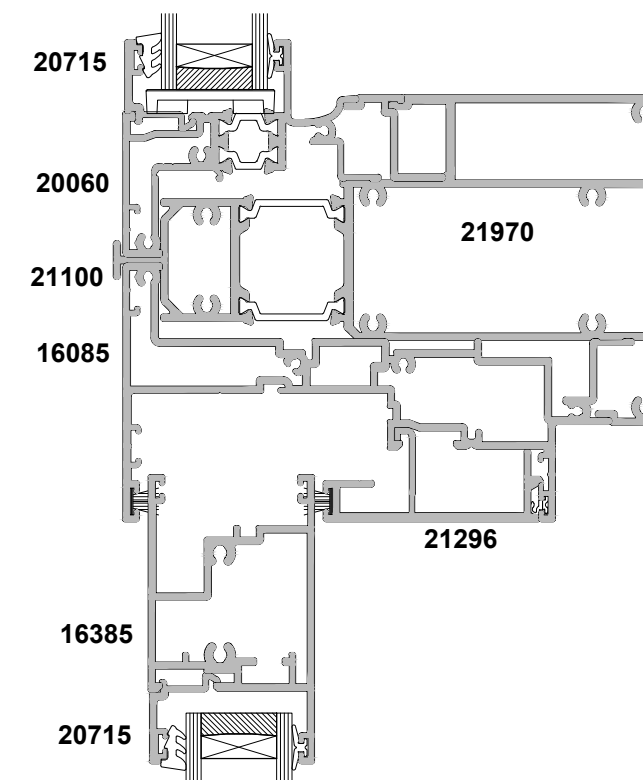
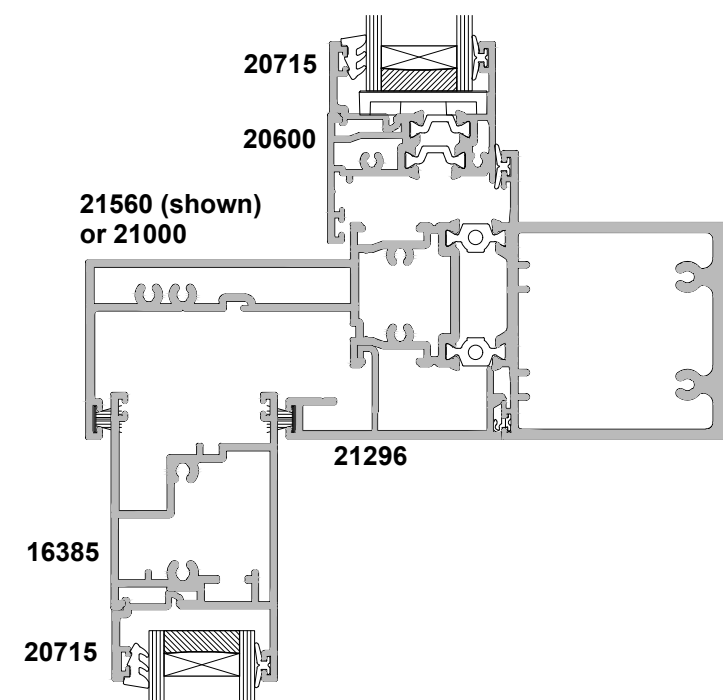
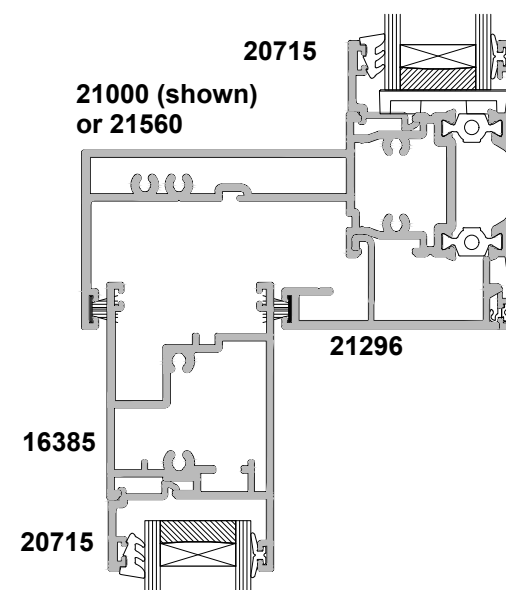


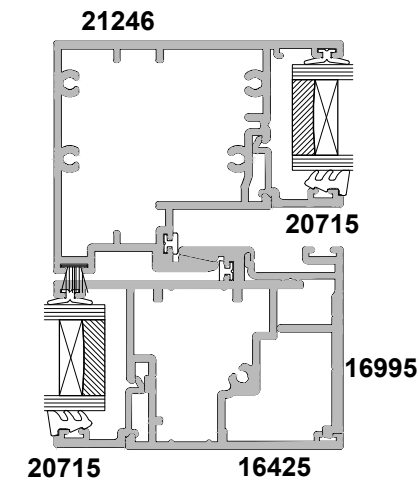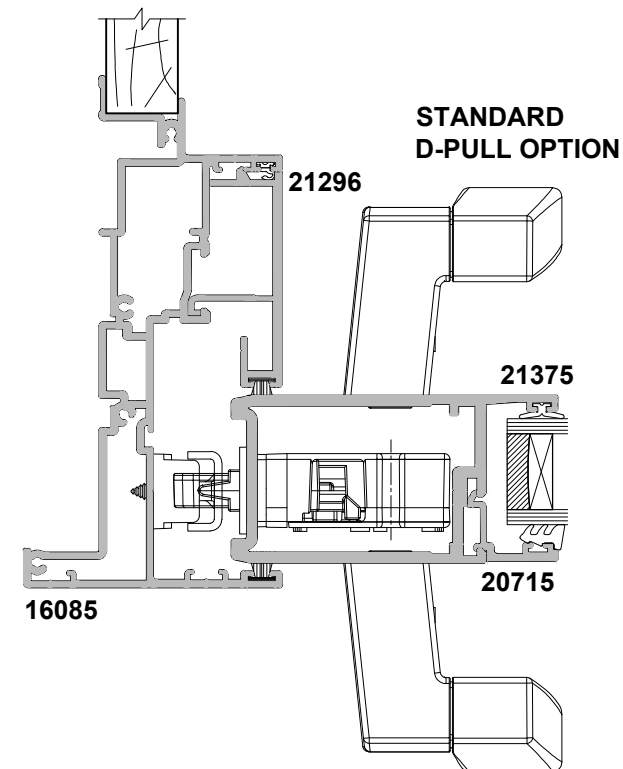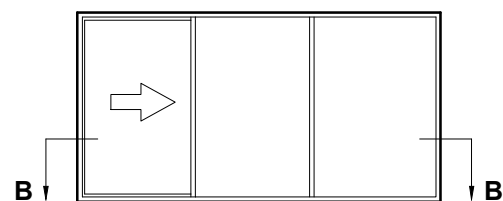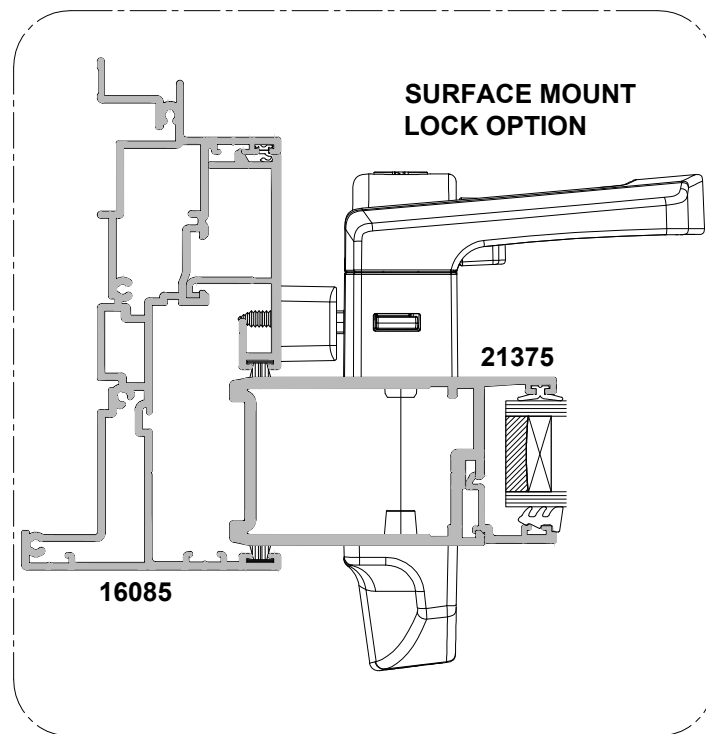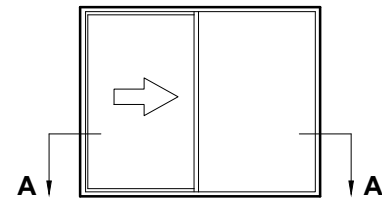

SECTION A-A

Standard
Flush Jamb
Option


20715
21075

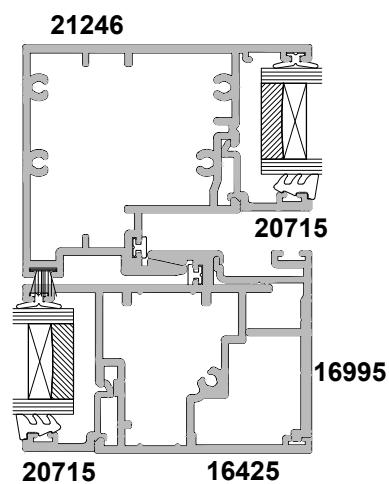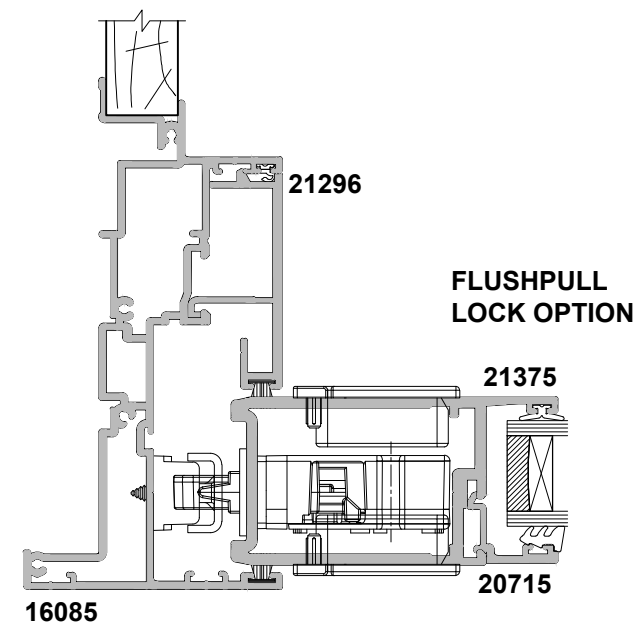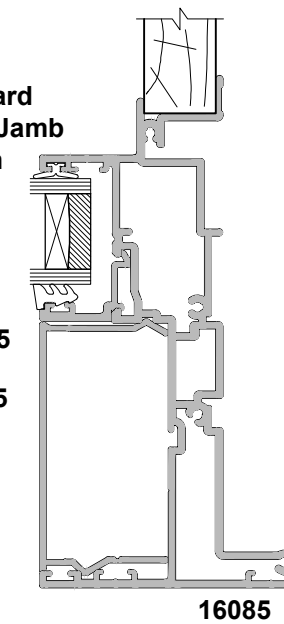



SECTION B-B



Standard
Flush Jamb
Option


20715
21075


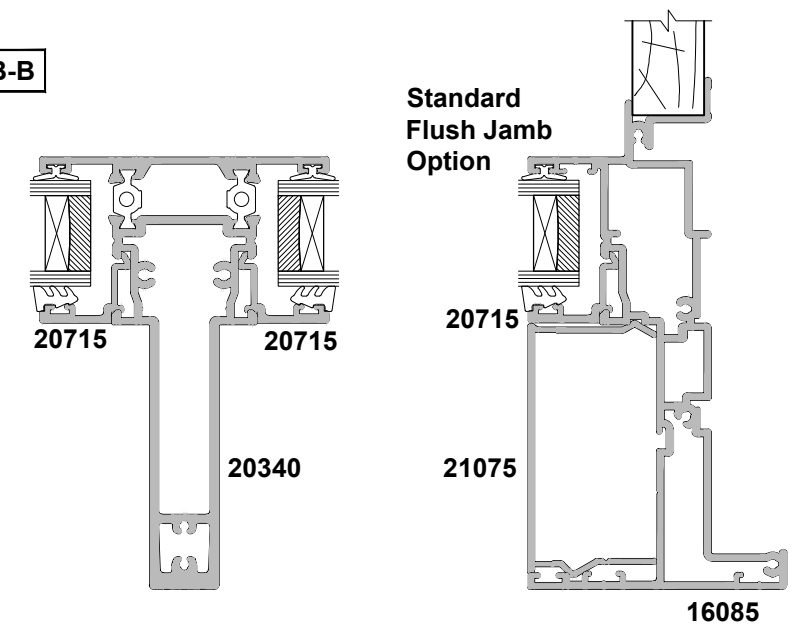


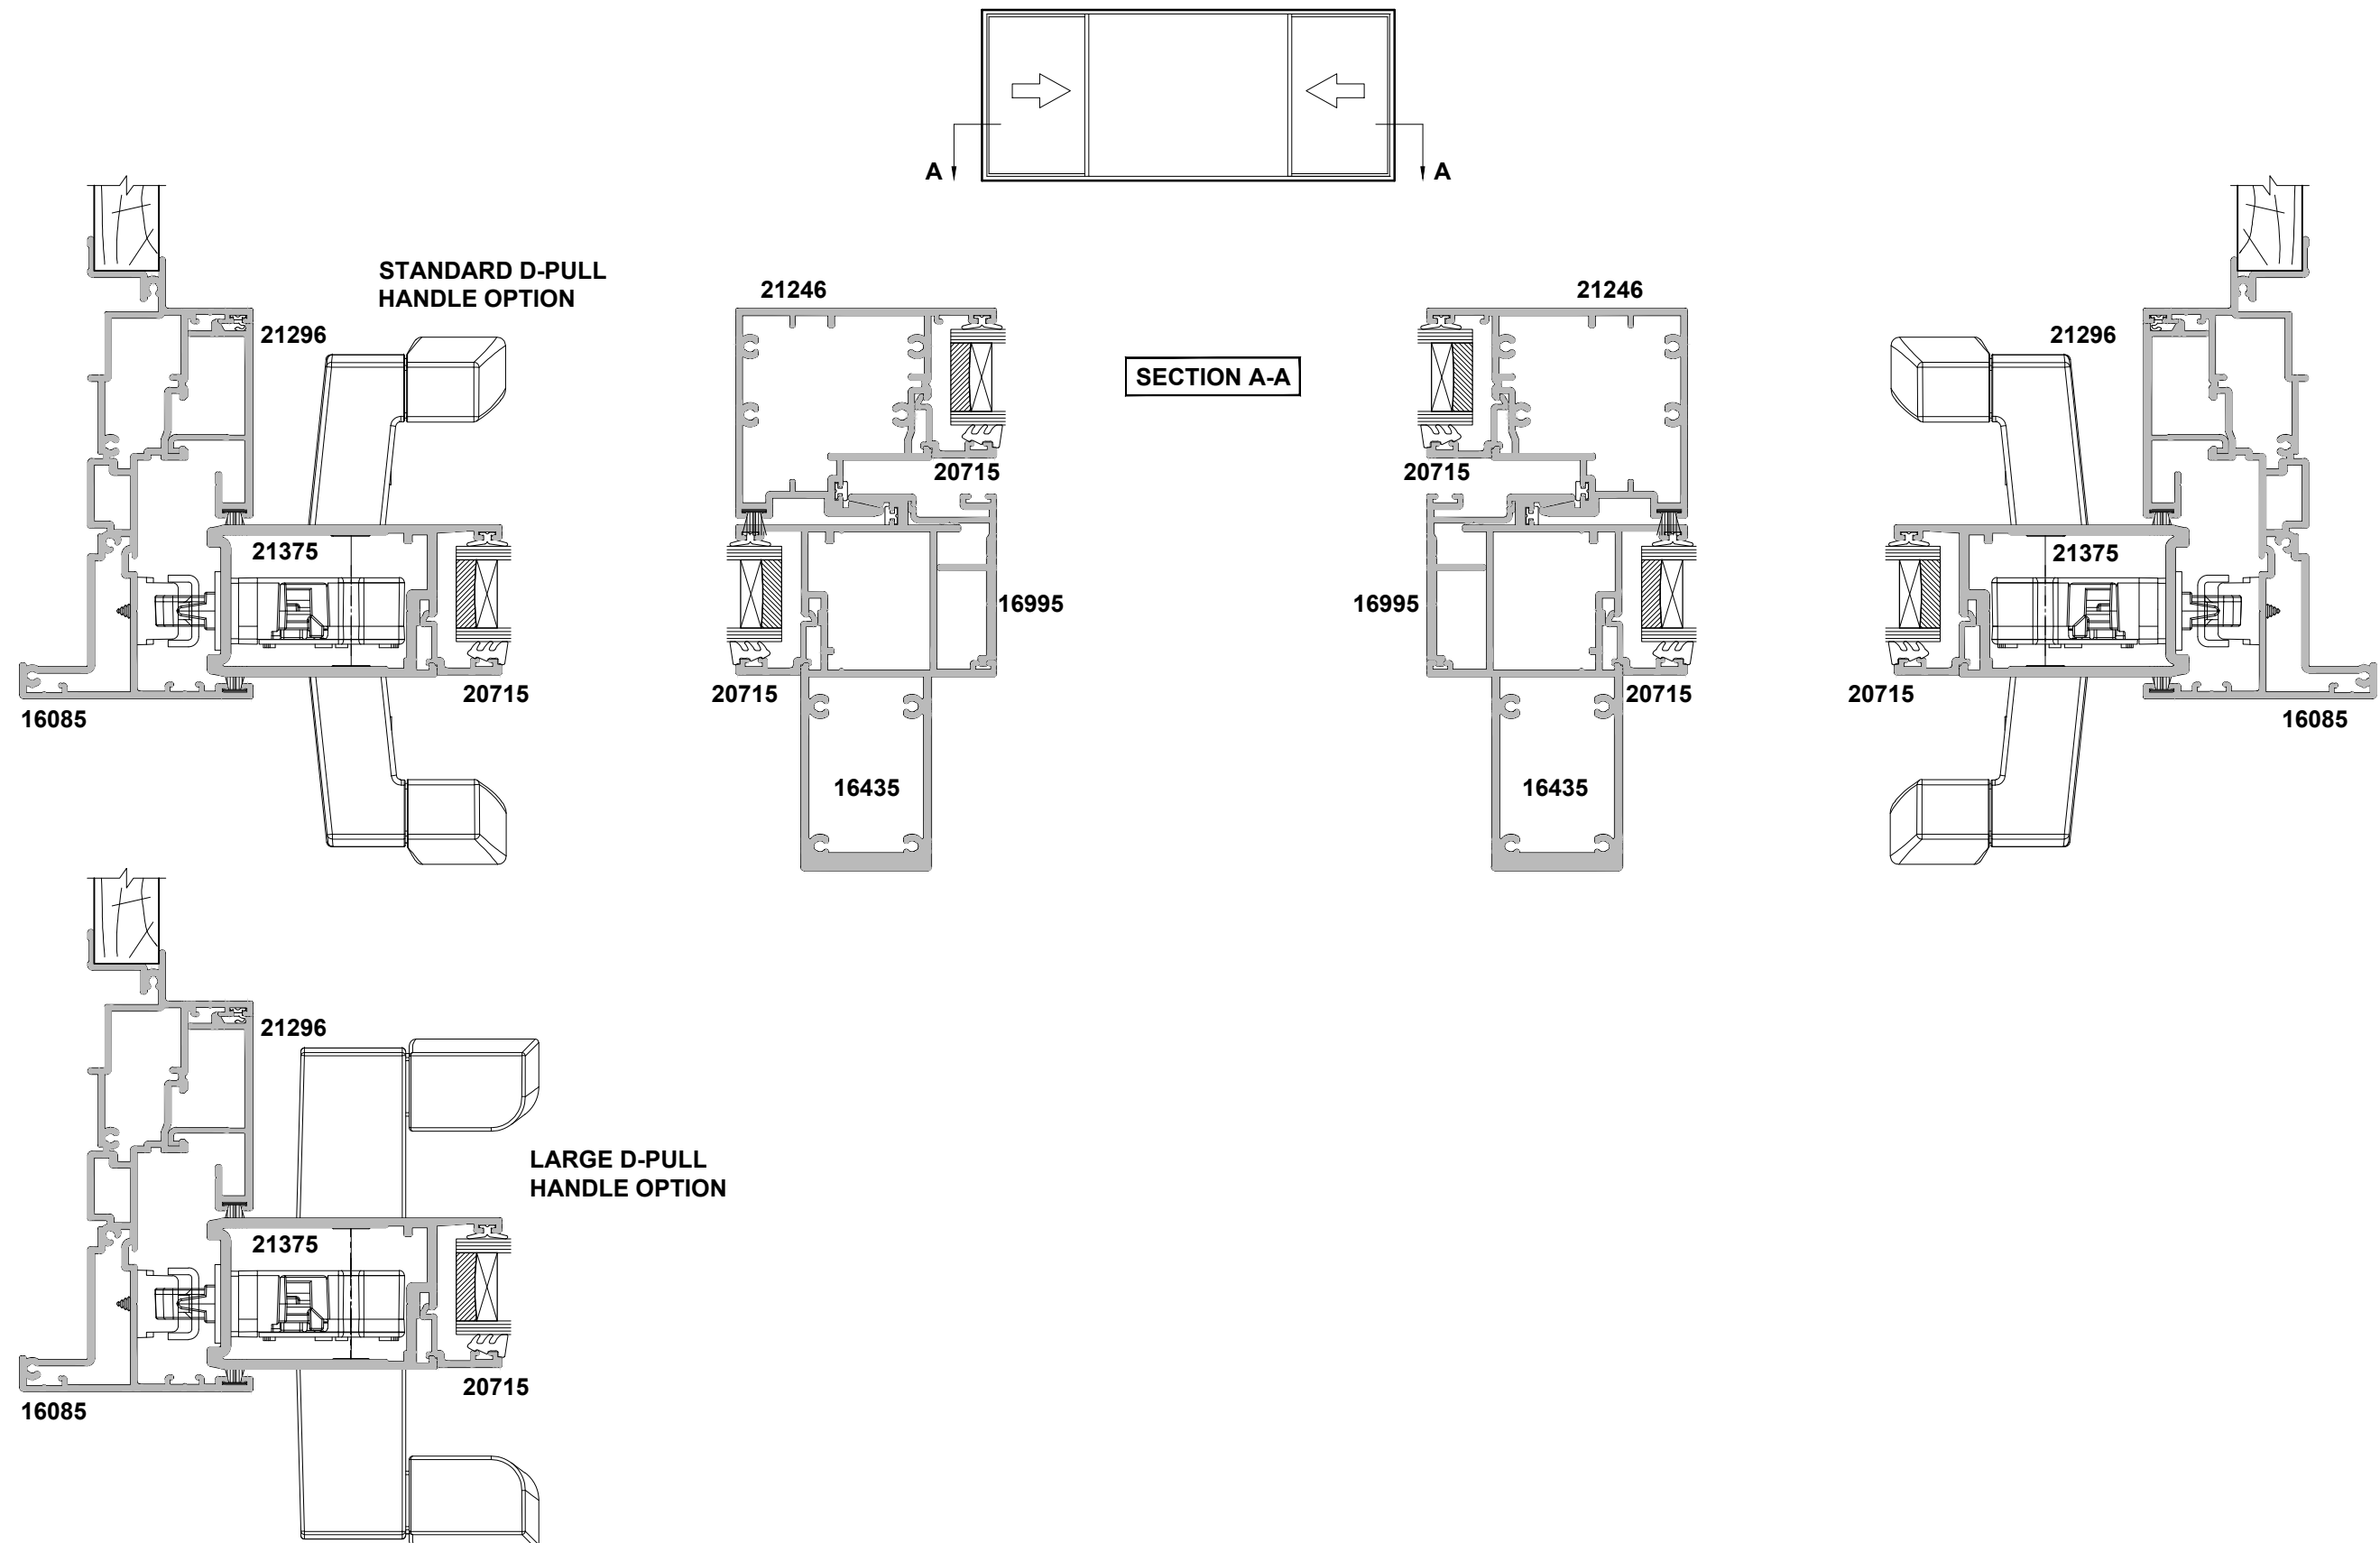

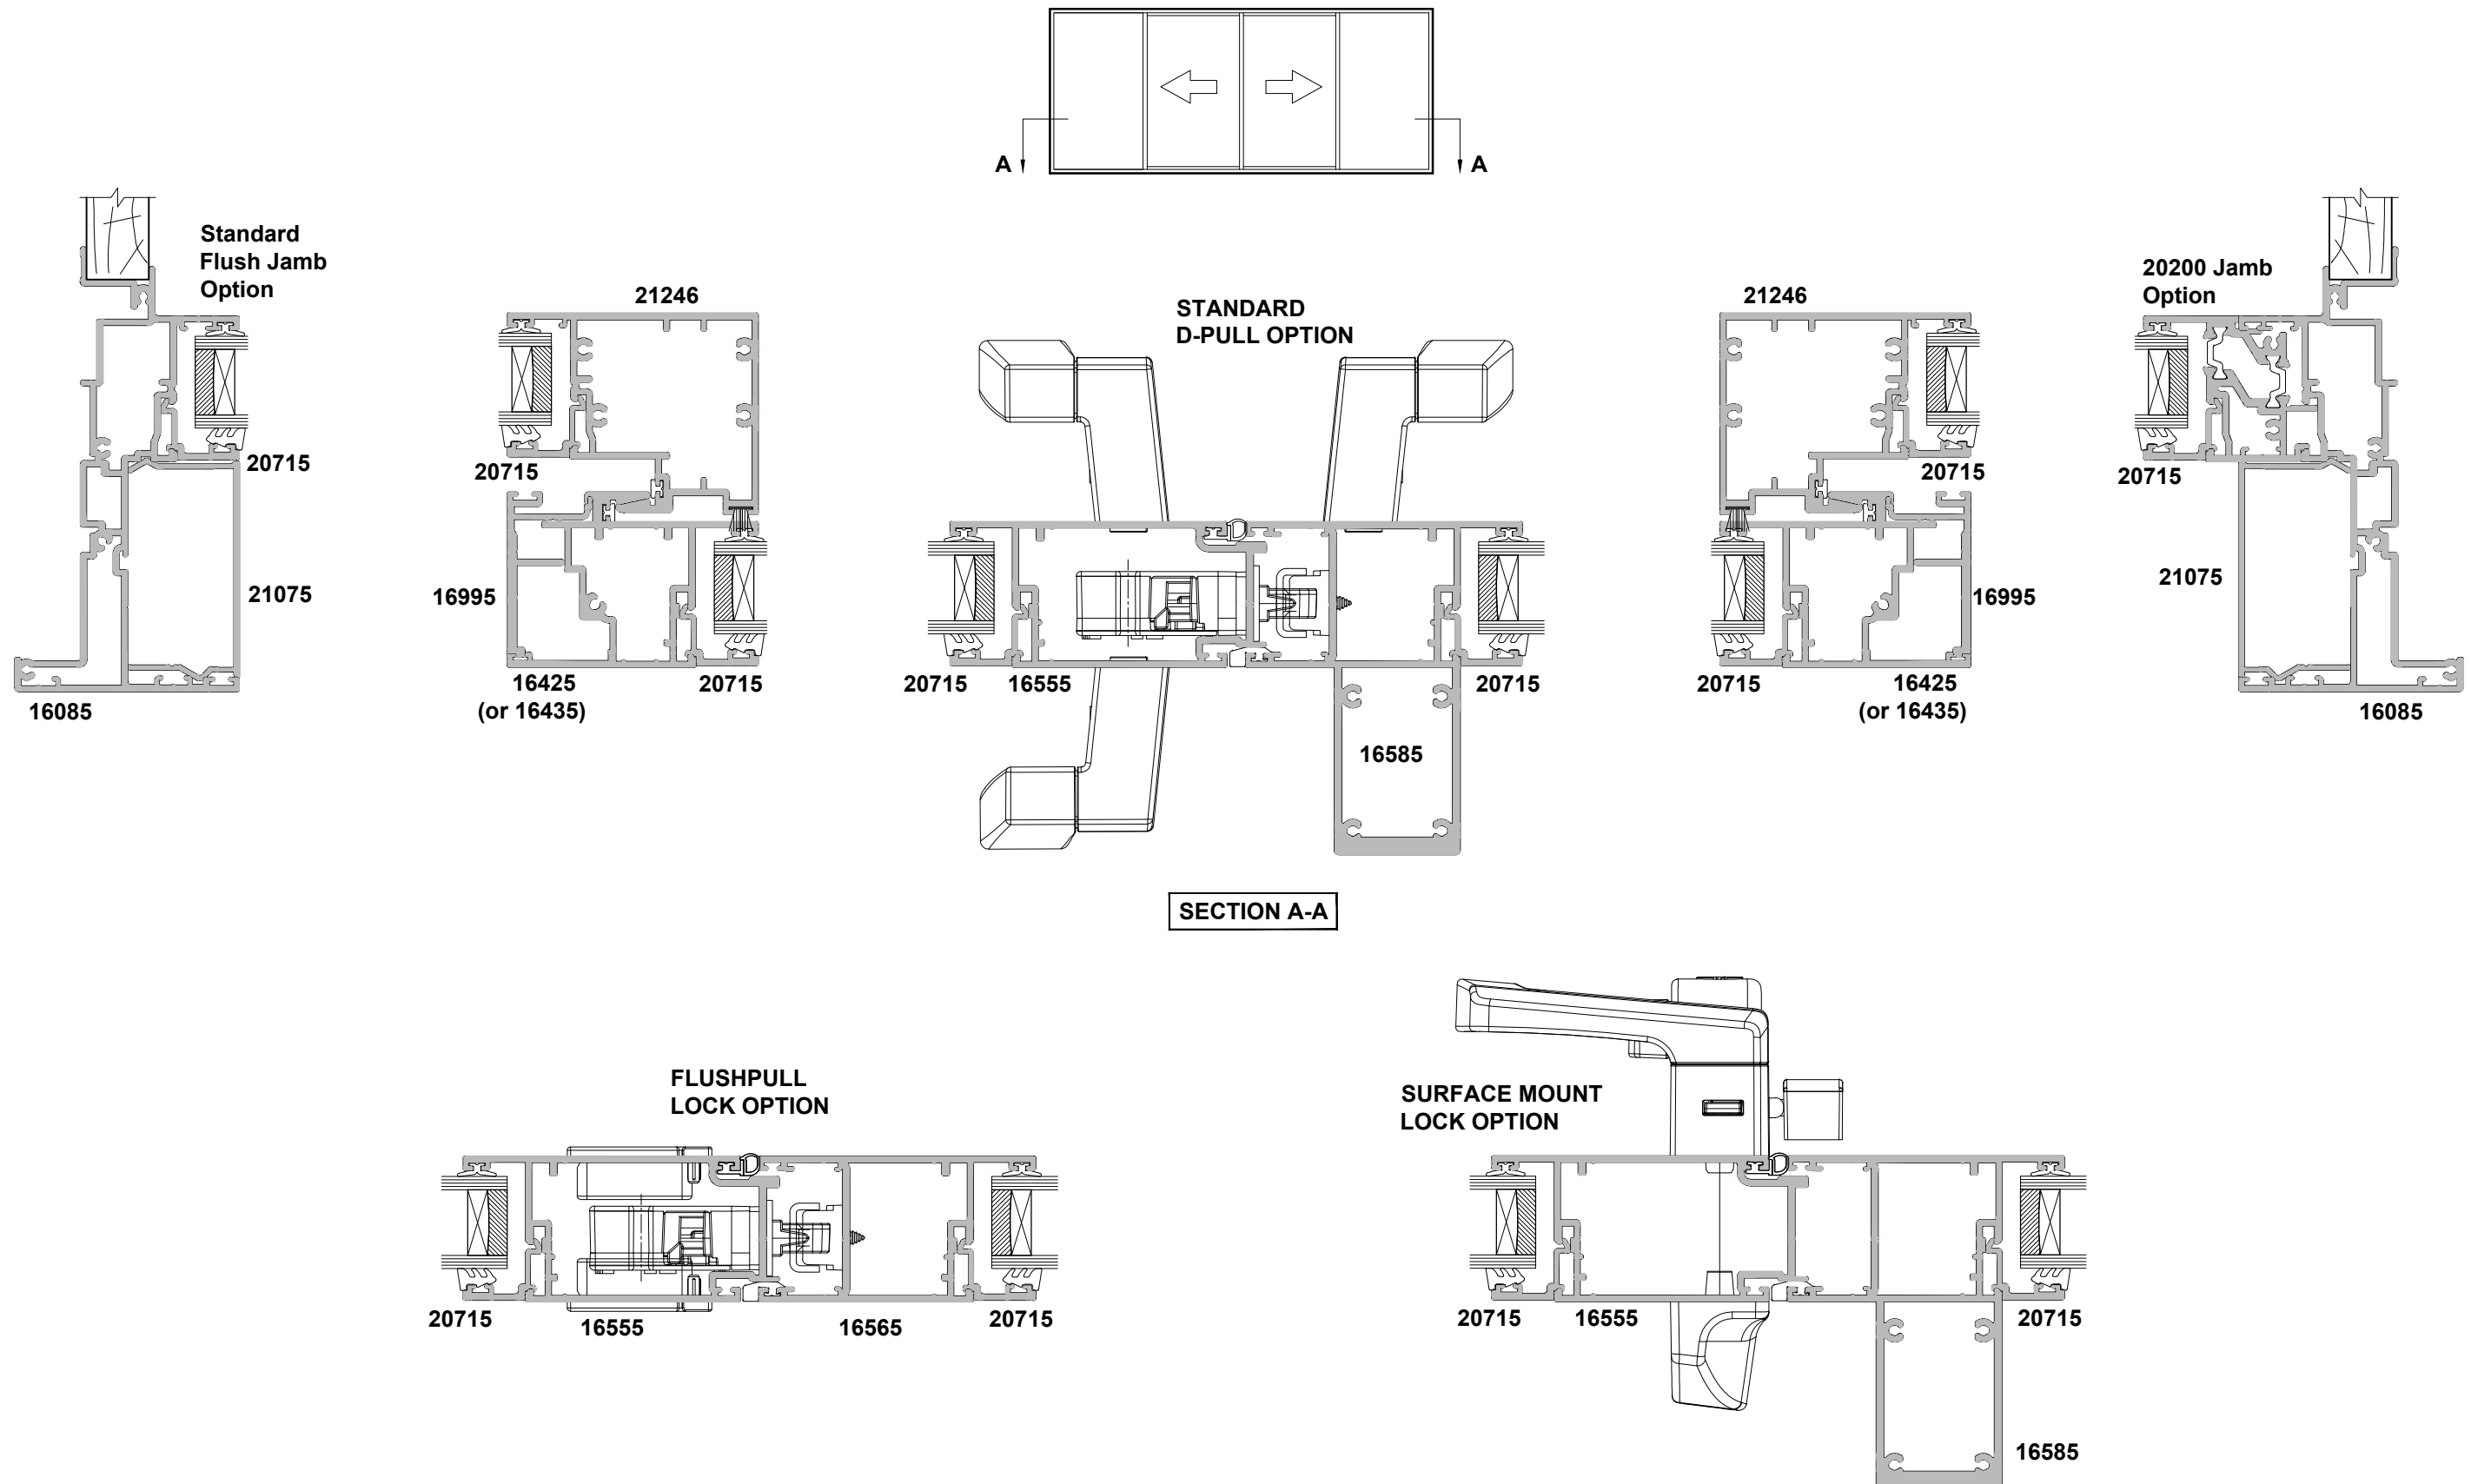


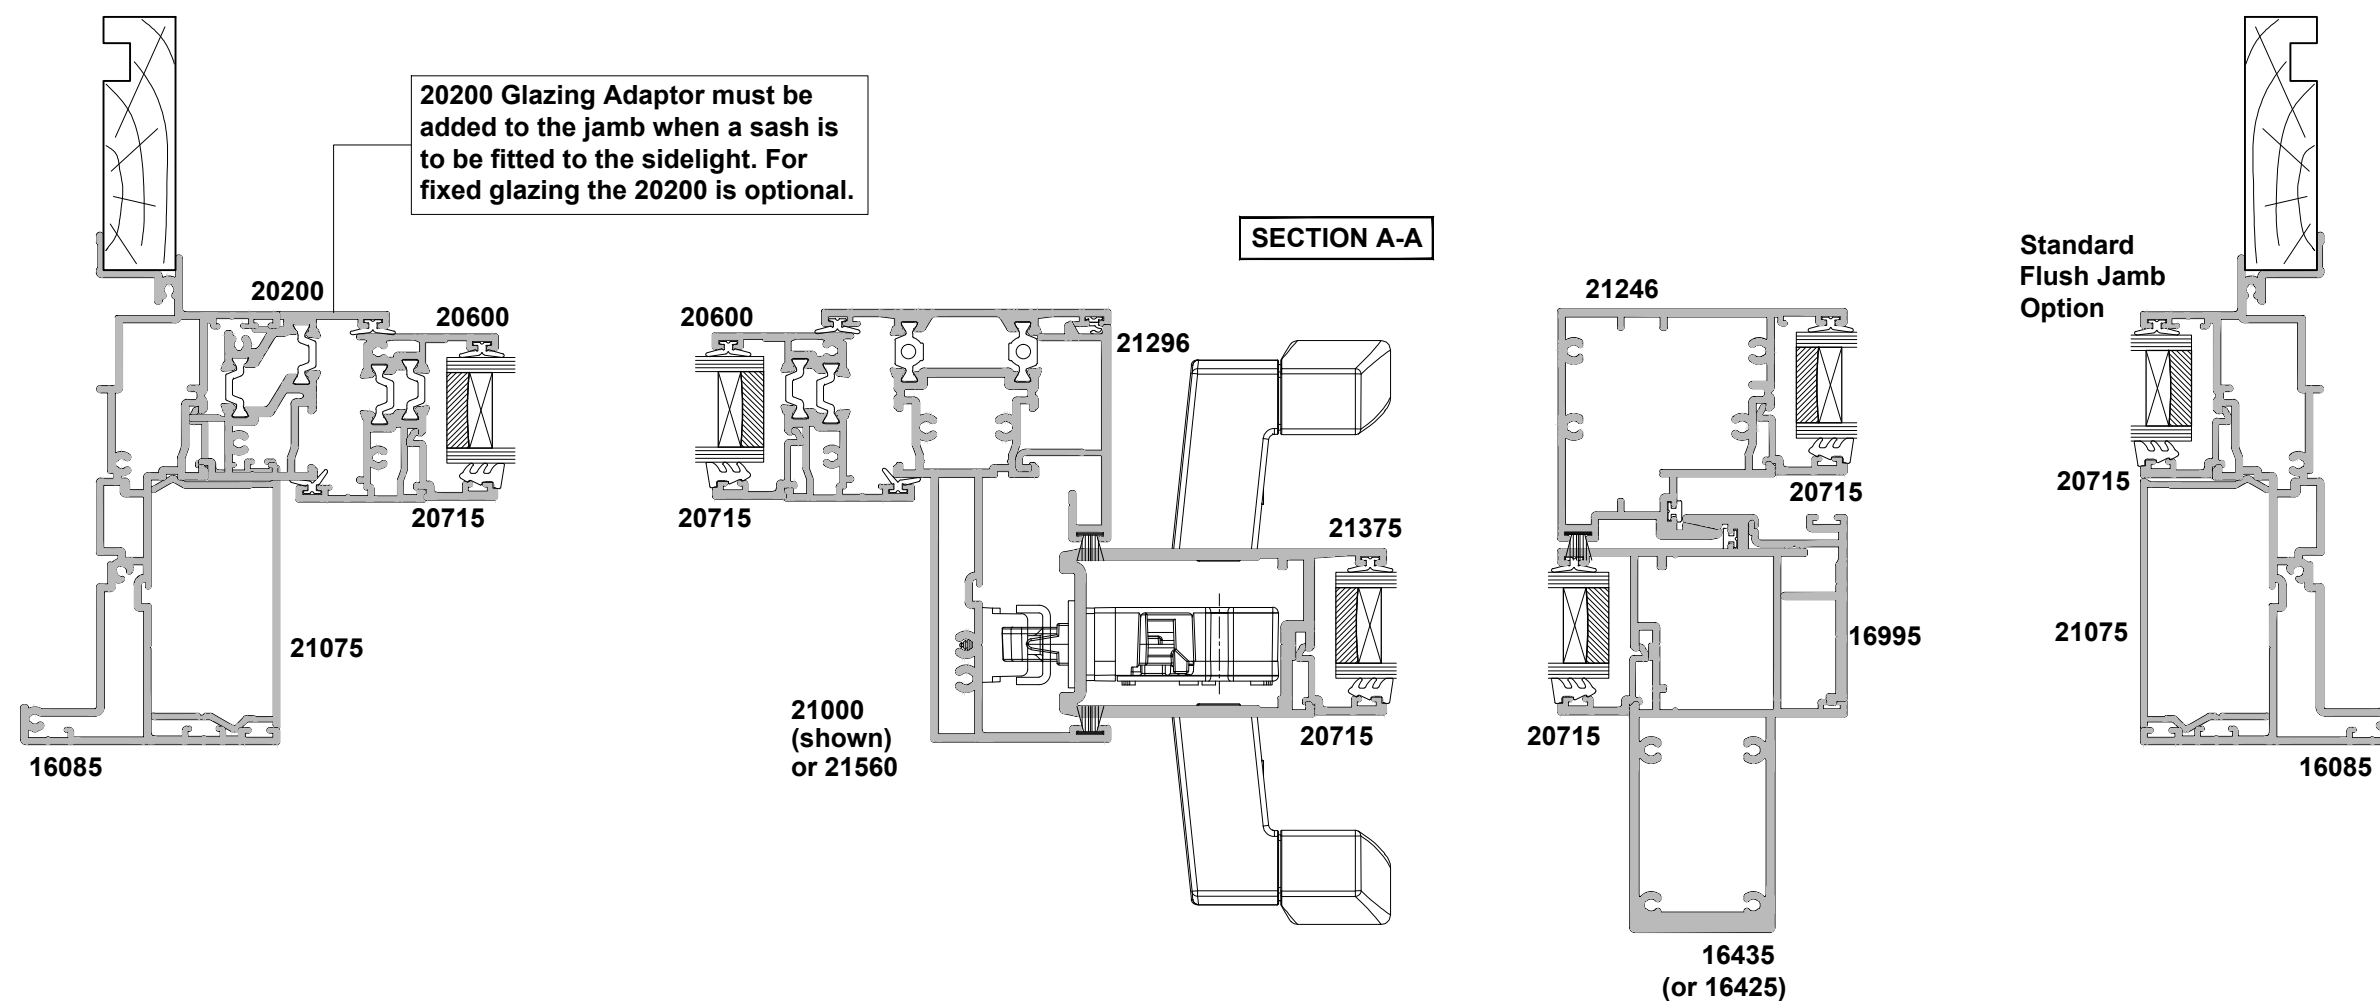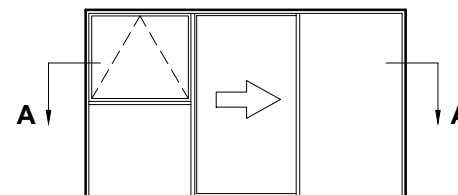

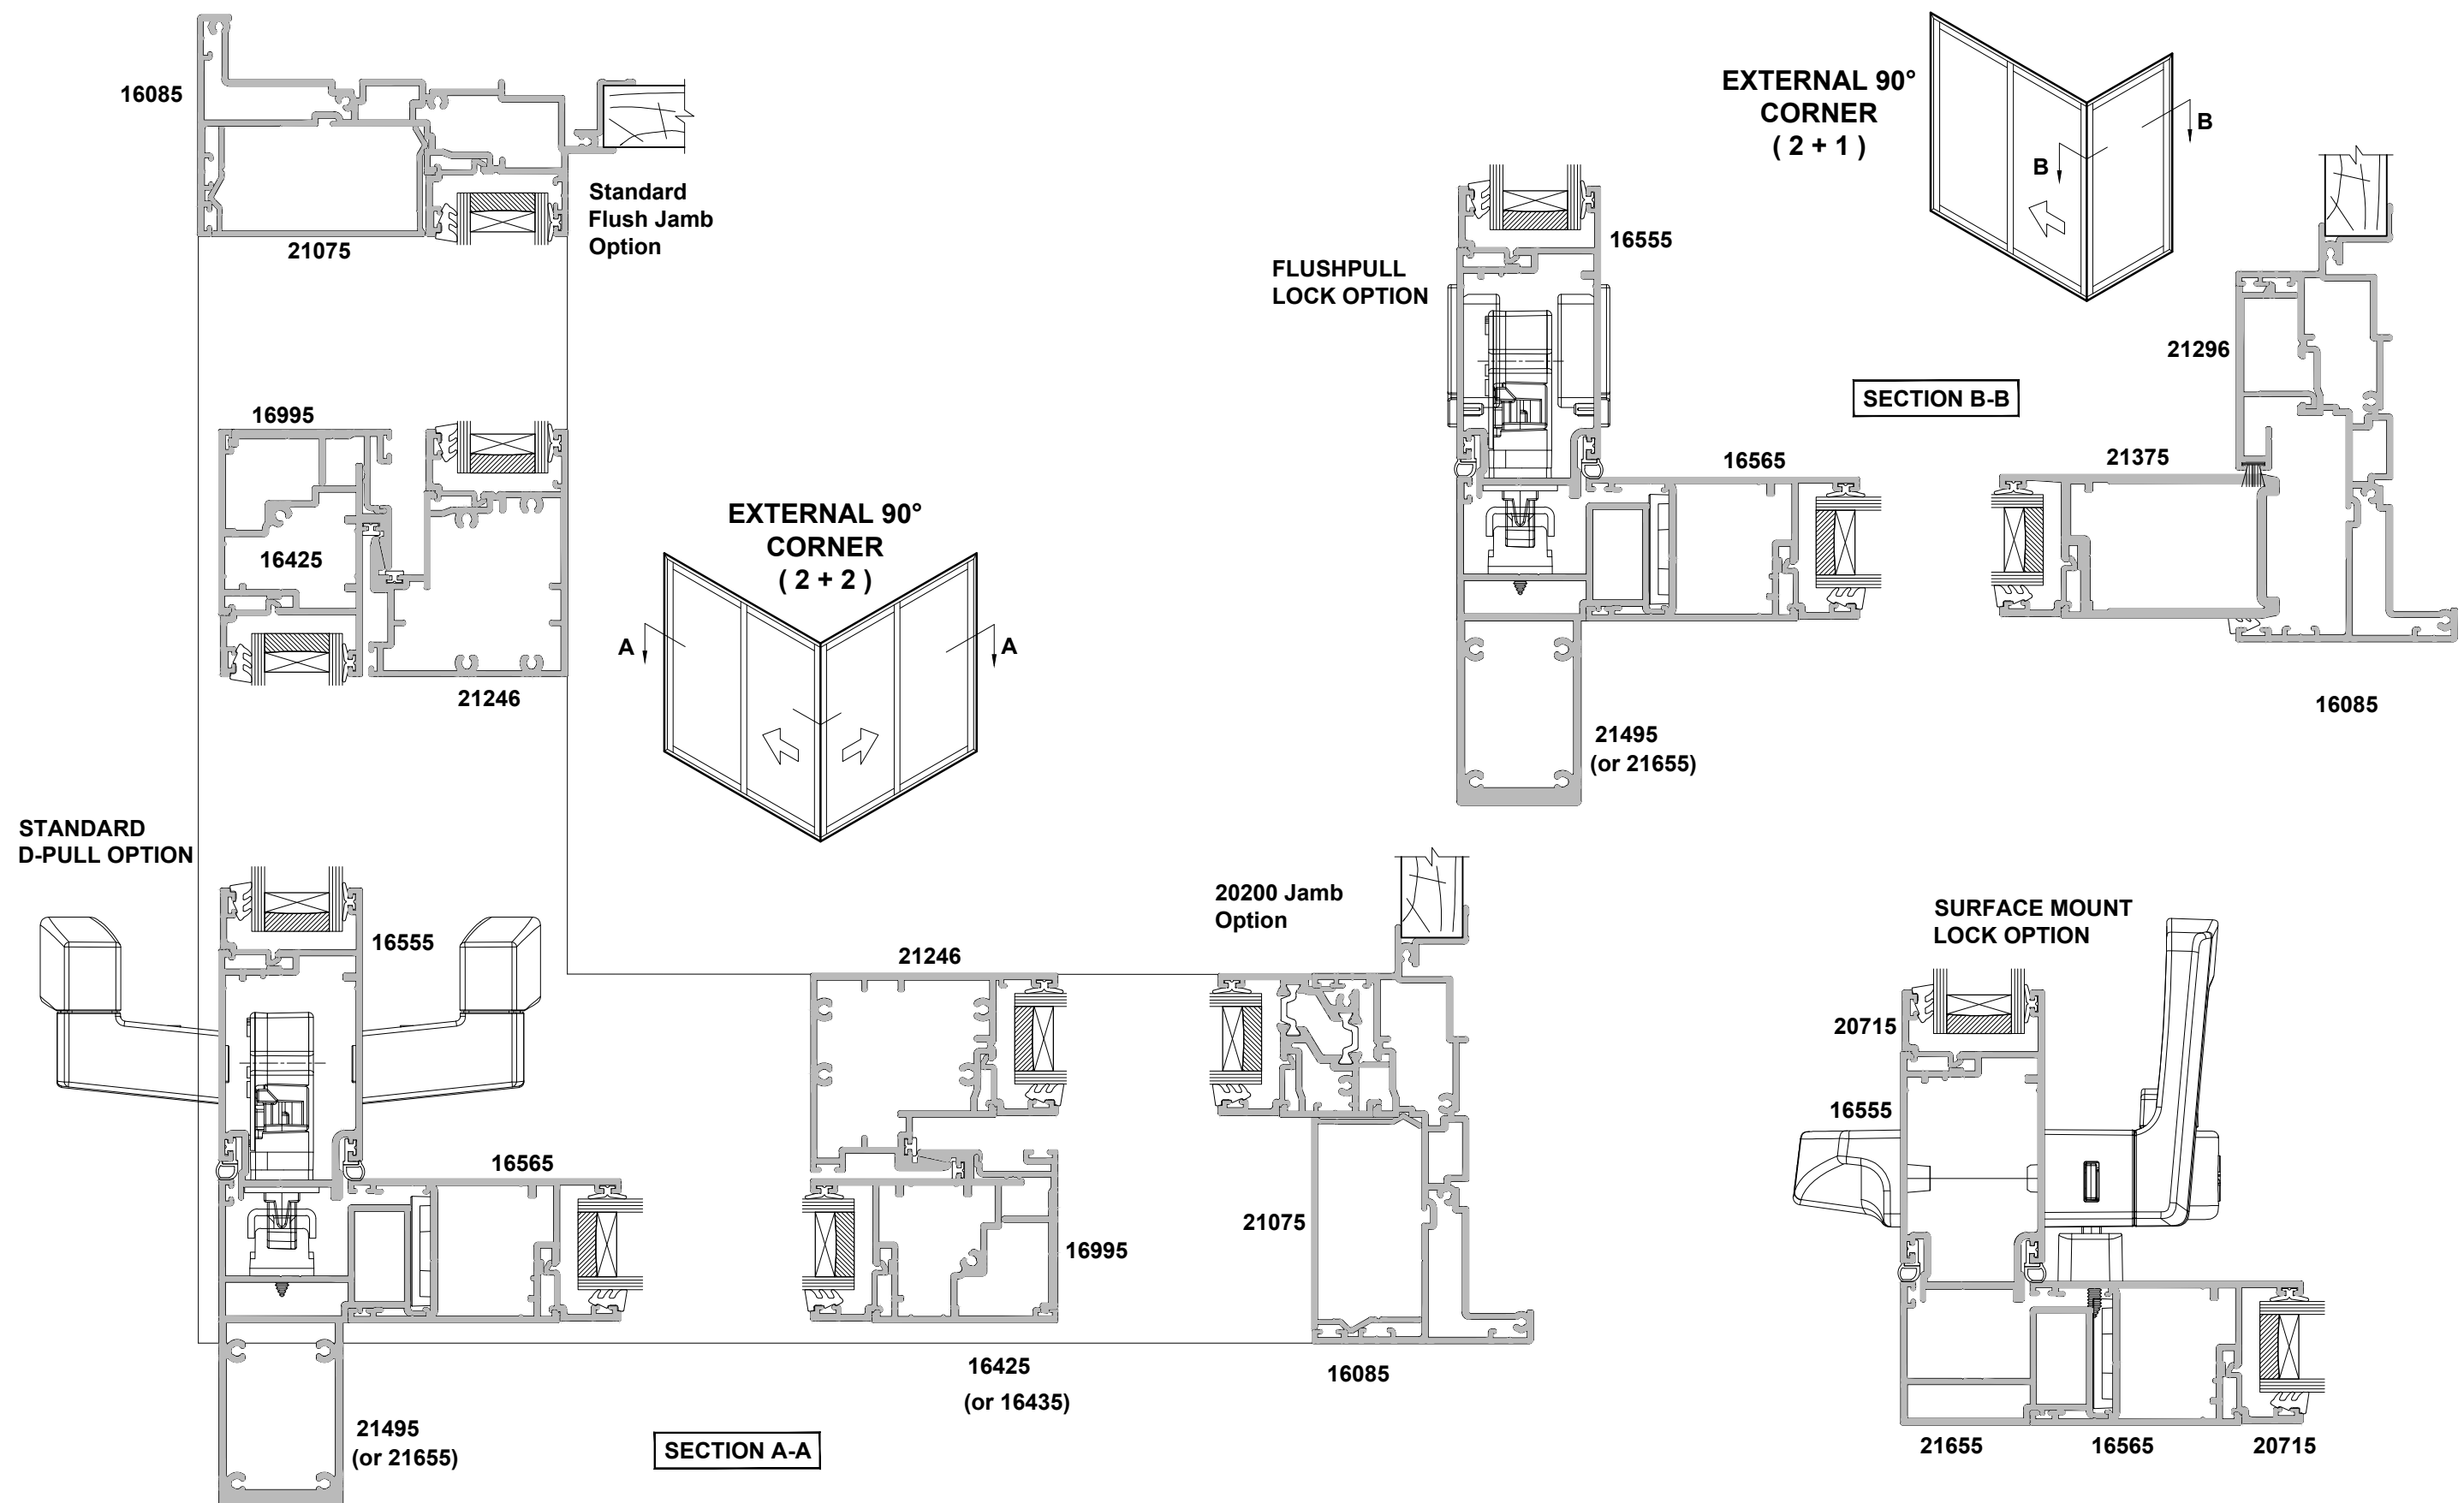


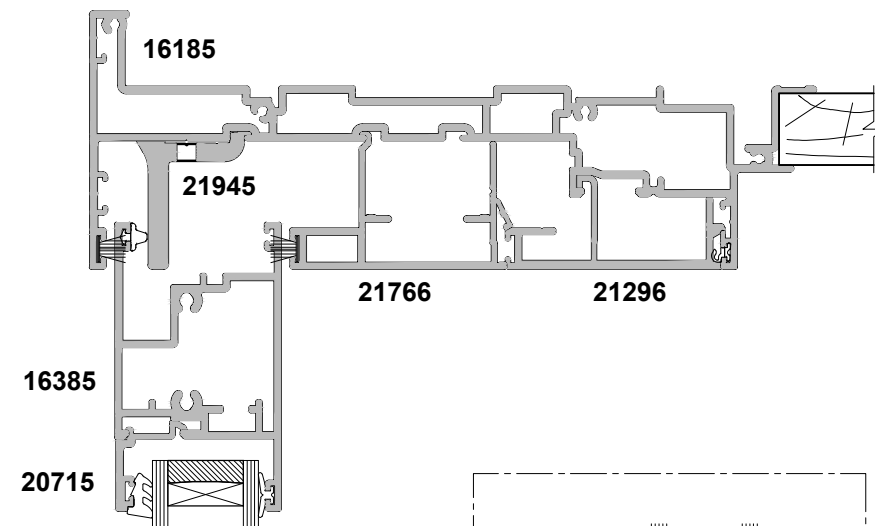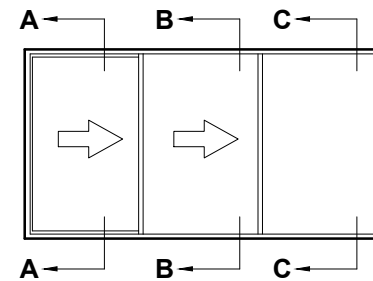




SECTION A-A



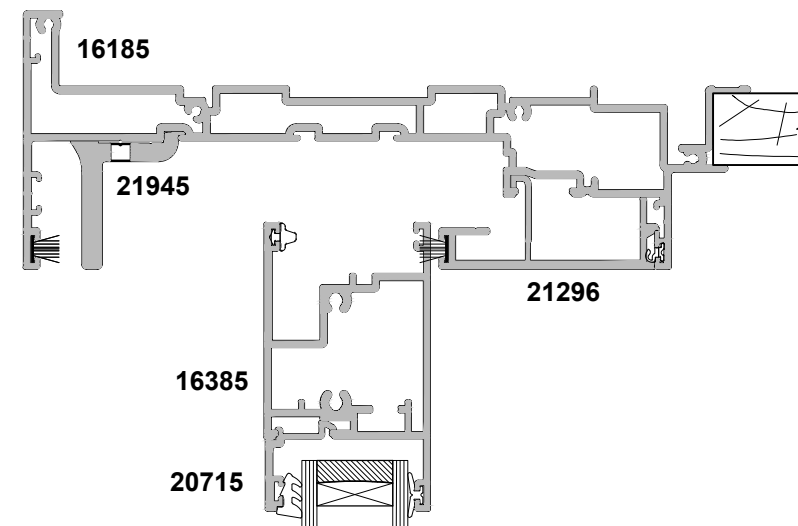


SECTION B-B


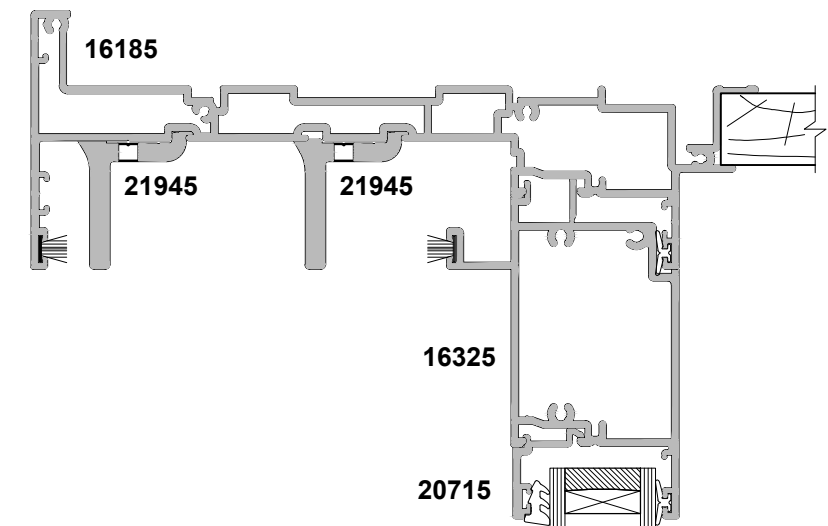


SECTION C-C

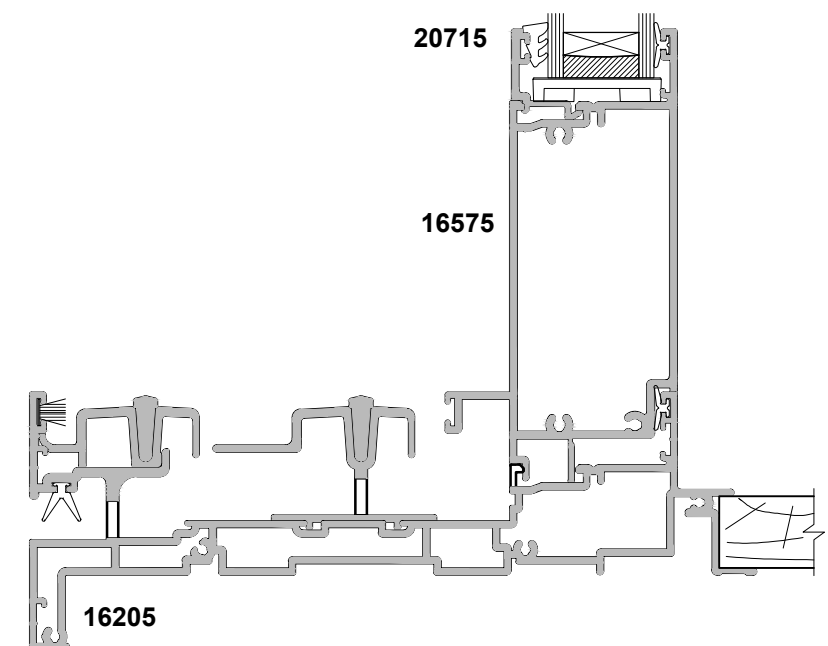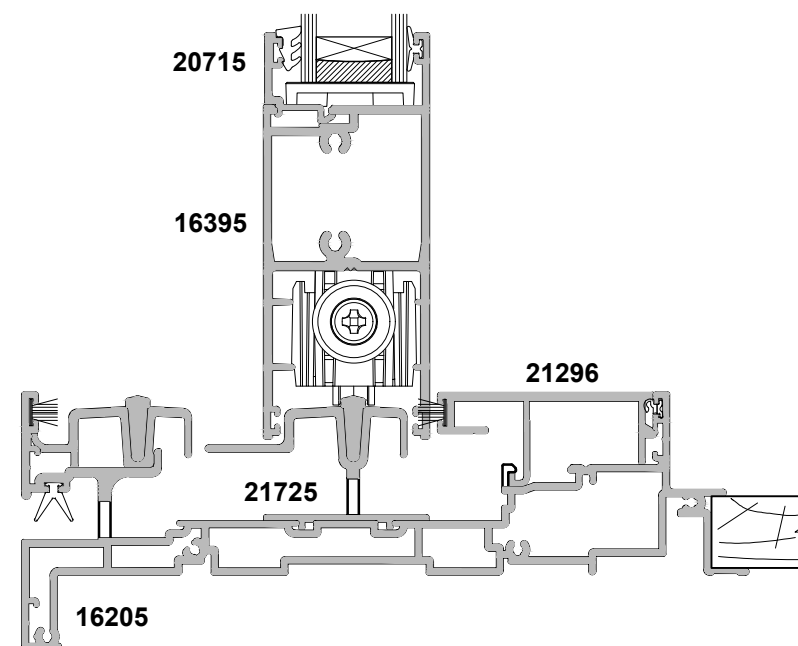
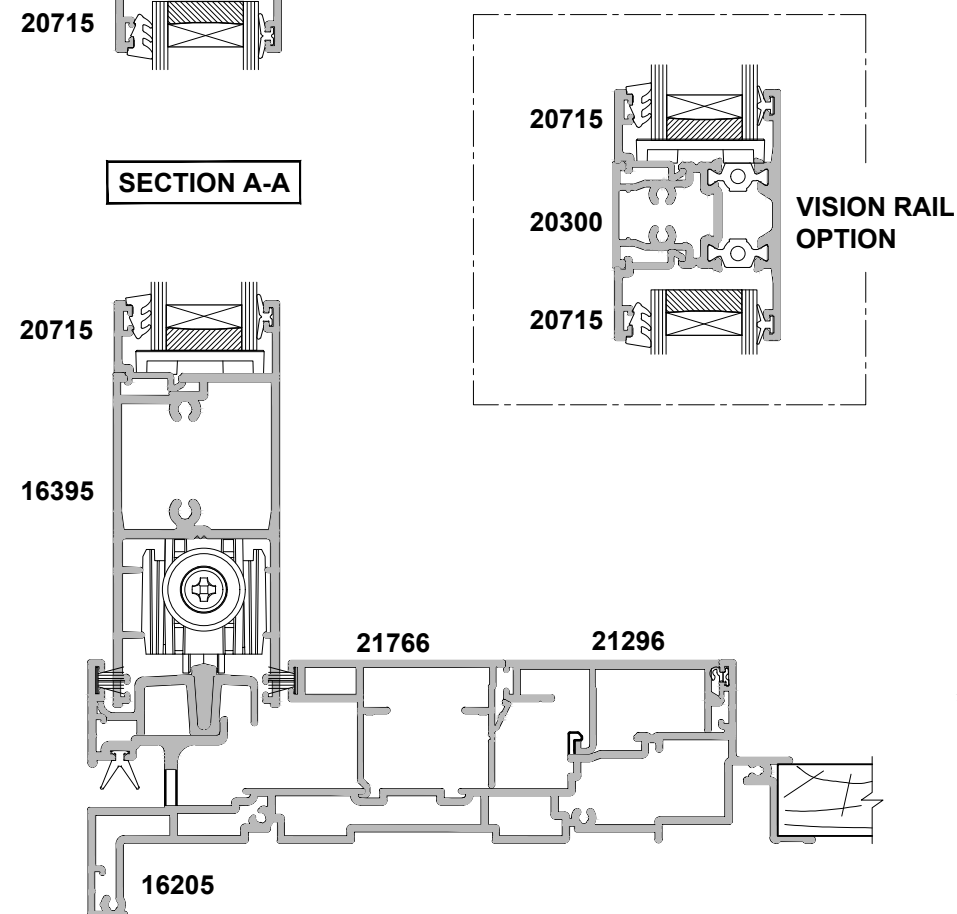


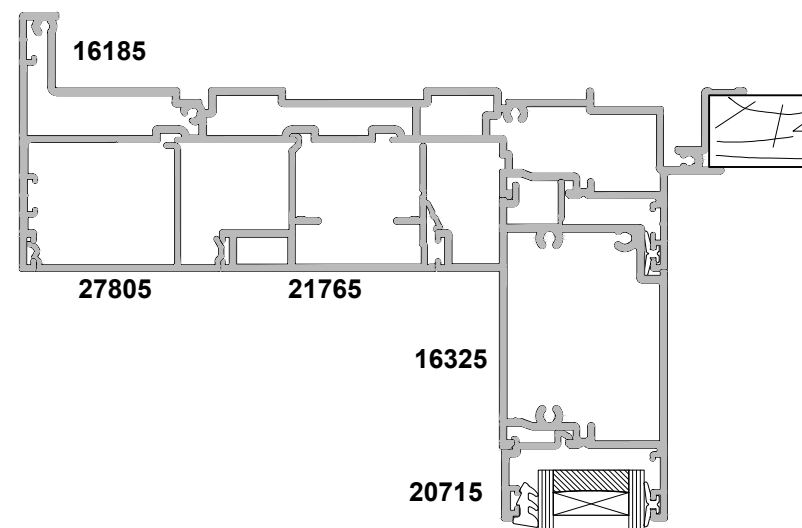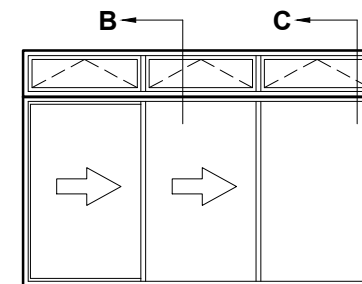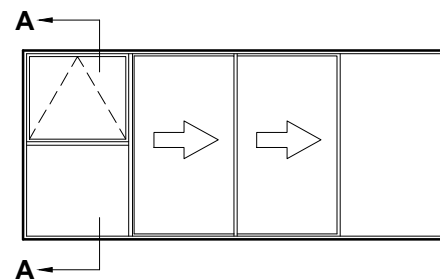


SECTION A-A



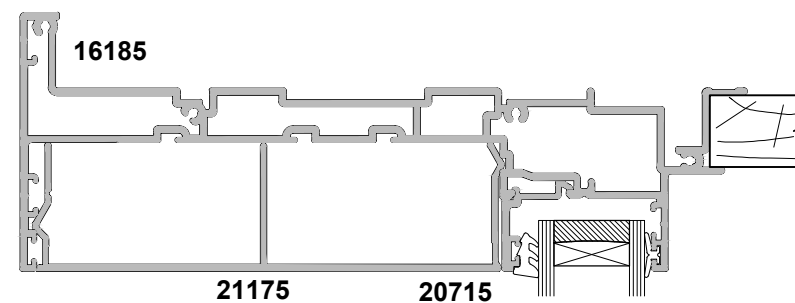
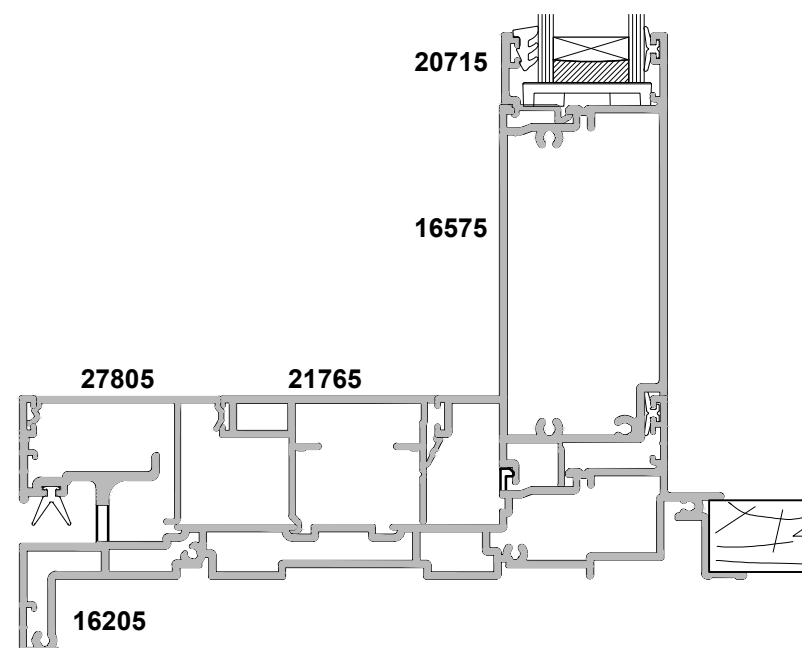


SECTION B-B

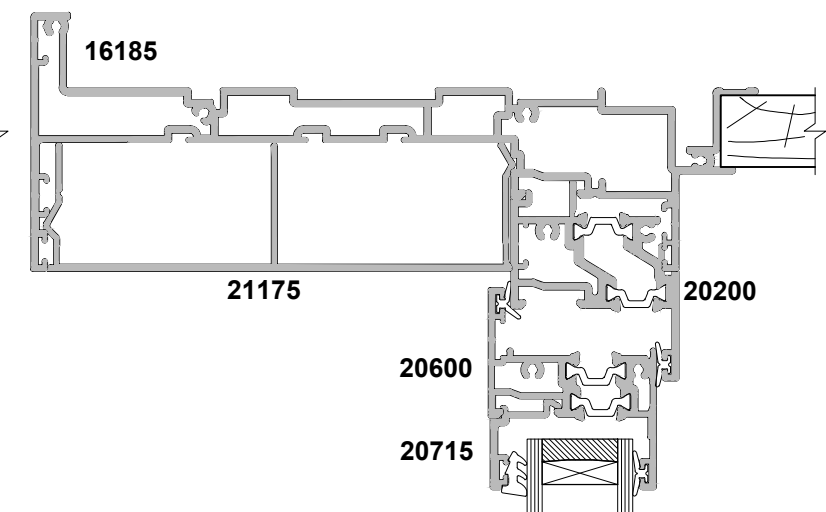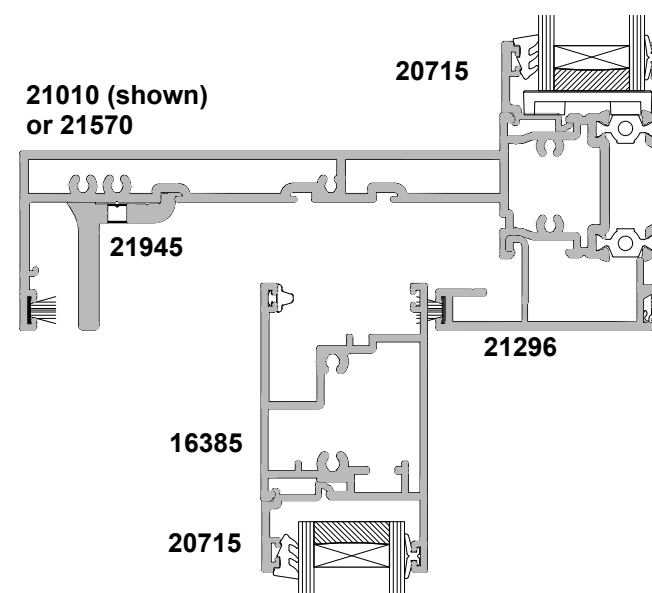


SECTION C-C


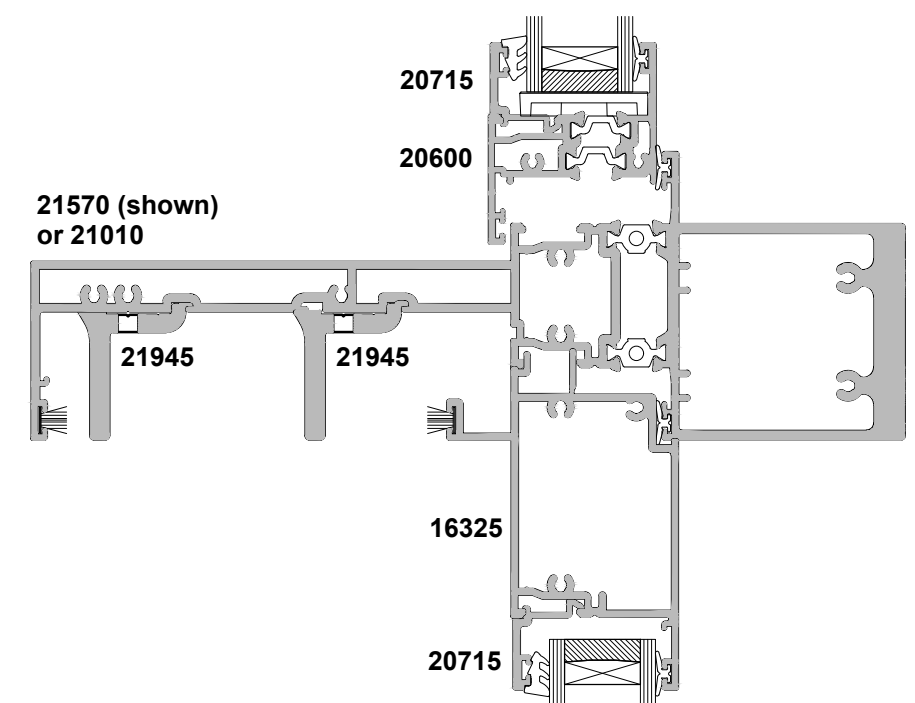


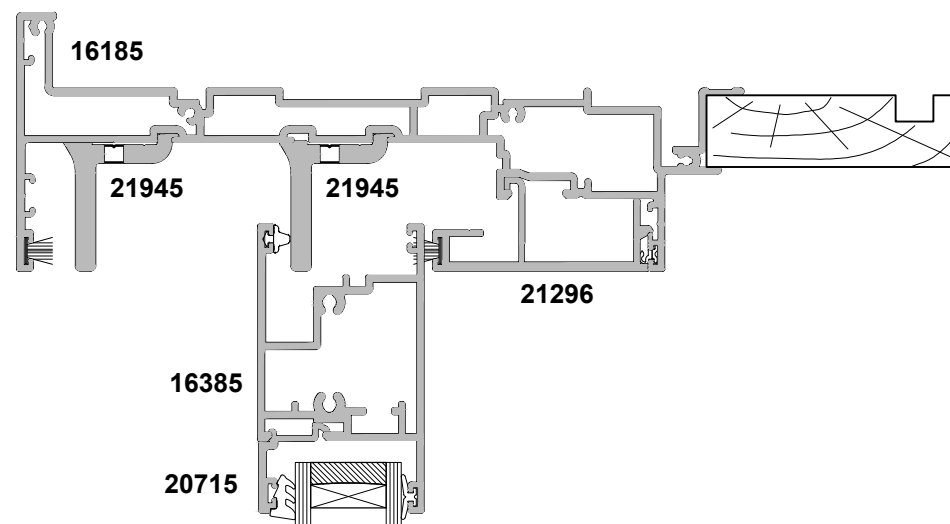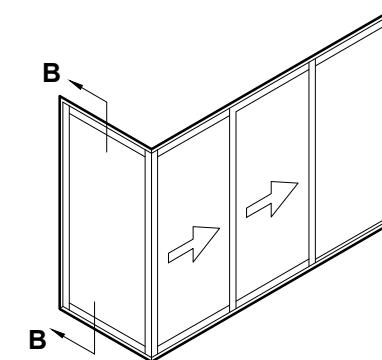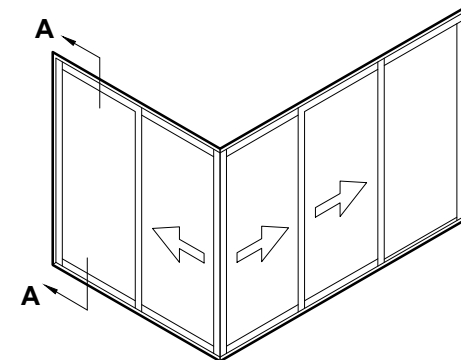
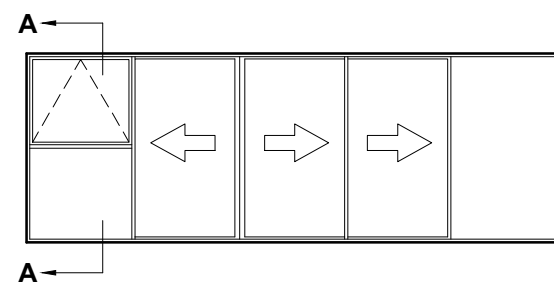


SECTION A-A

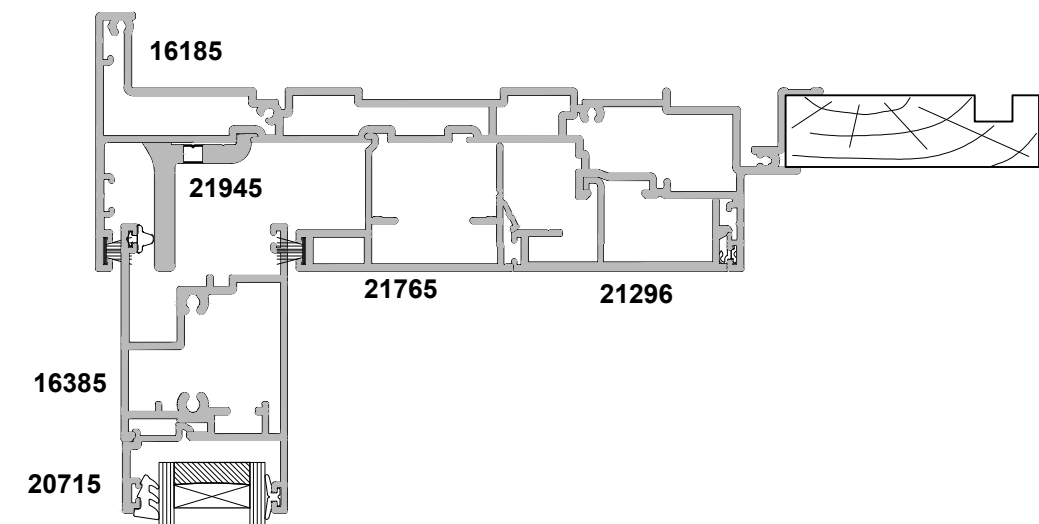


SECTION B-B


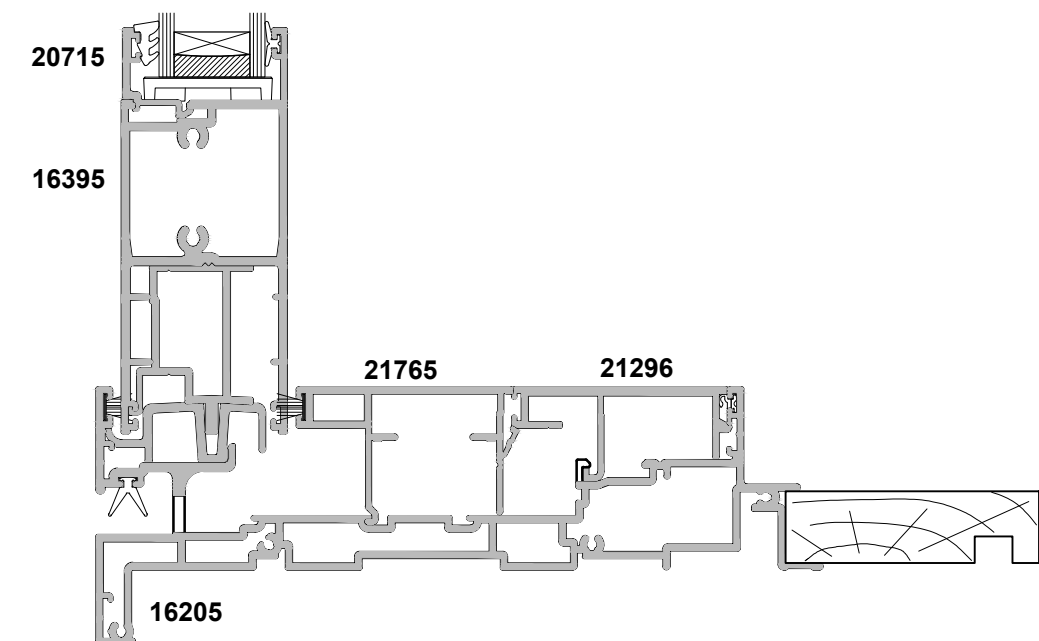
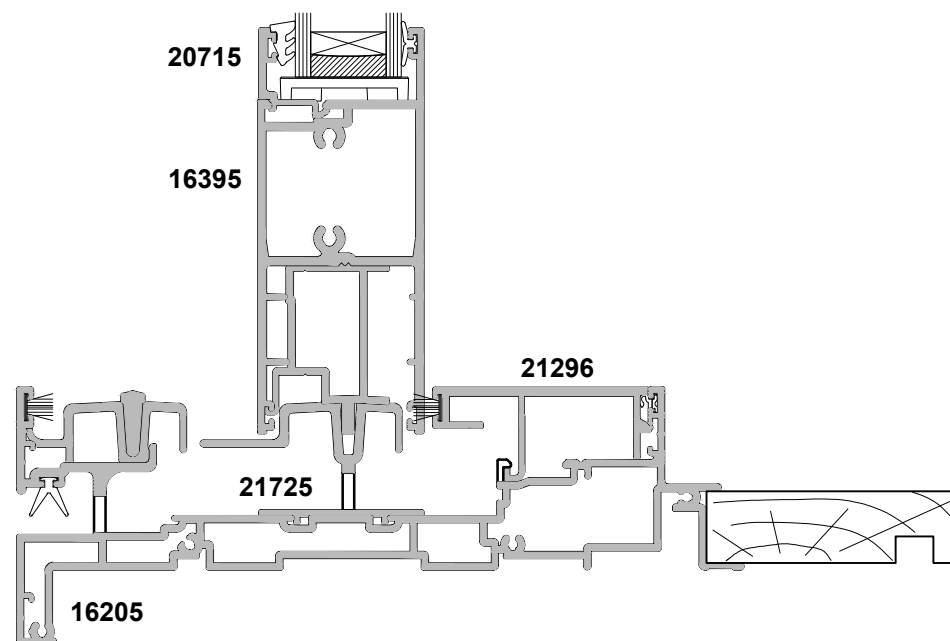


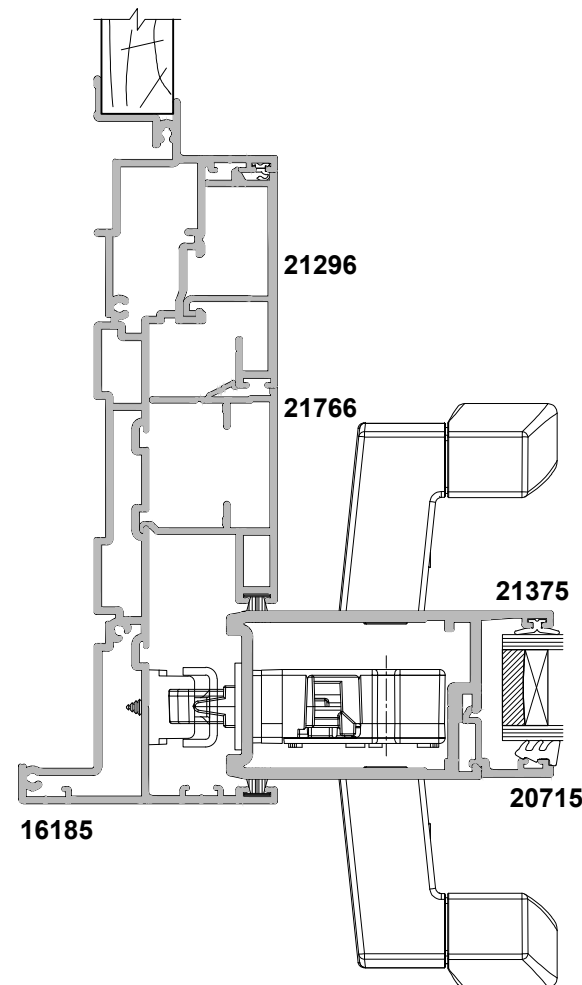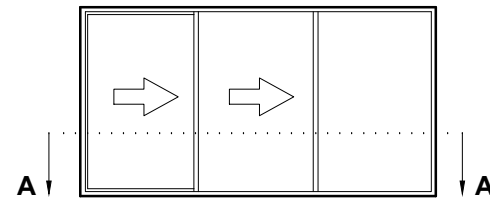


**STANDARD
D-PULL OPTION**

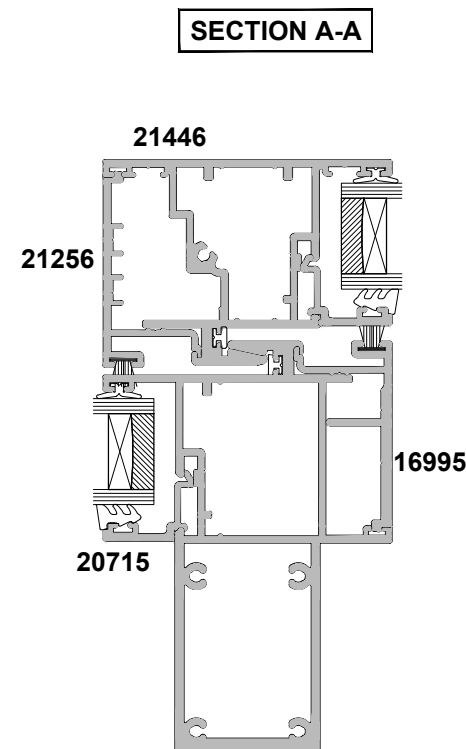

SECTION A-A

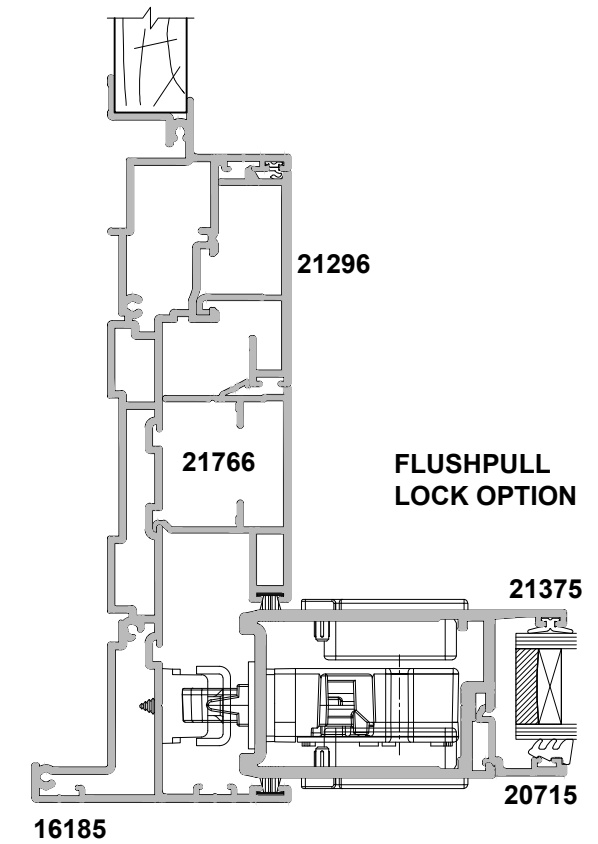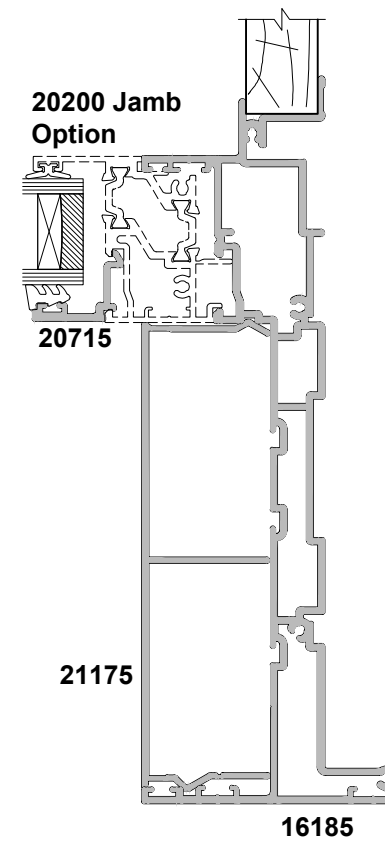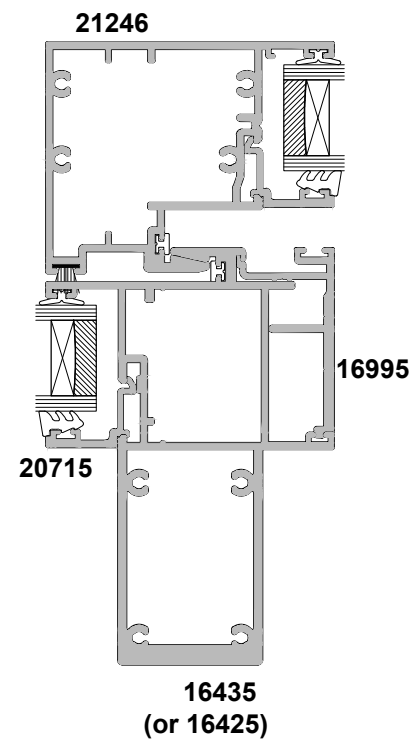

**FLUSHPULL
LOCK OPTION**

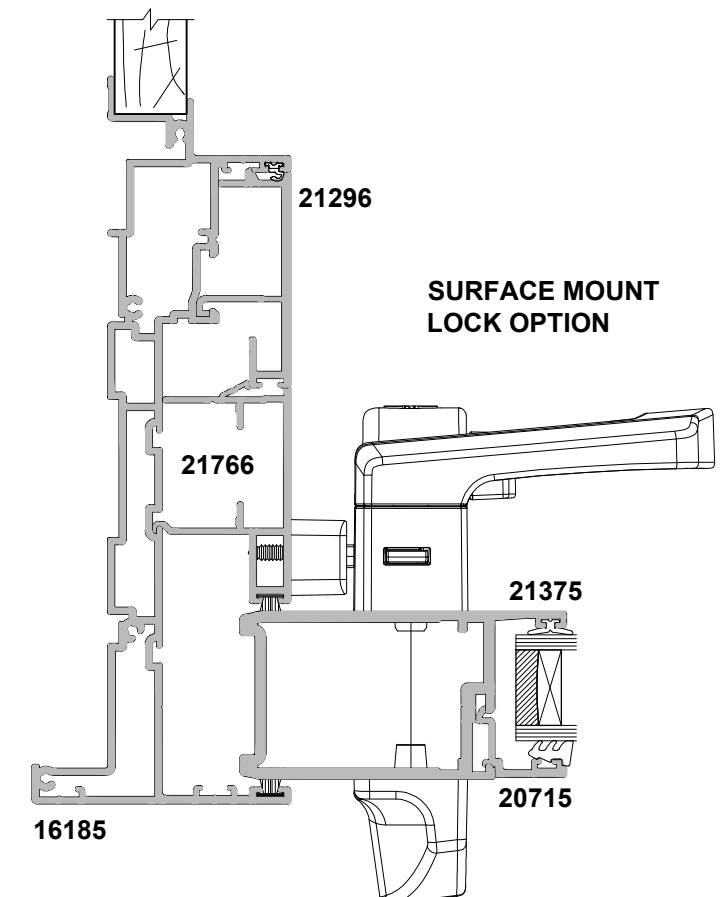

**SURFACE MOUNT
LOCK OPTION**

