


North Bath Spout Brushed Gunmetal NRT91BG





Congratulations on your purchase of this high quality product from Foreno Tapware. Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for All Pressures

Minimum Pressure = 35kPa Maximum operating Pressure = 500kPa Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION


Mains Pressure systemsInstall as supplied.Unequal Low systemsInstall as supplied.Equal Low systemsInstall as supplied.

INSTALLATION

For pressures exceeding 500kPa, install a pressure reducing valve. Failure to do so will void the warranty.

- Before commencing installation, turn off the water supply.
- Remove the brass mounting adaptor from the spout by un-screwing the grub screw underneath the spout. (see diagram on next page for detail)
- Install the adaptor onto the wall spigot, and tighten.
- Fit the spout onto the adaptor and tighten the grub screw back on.
- Turn on the water supply.
- Check for leaks.

ATTACH PROOF OF PURCHASE HERE

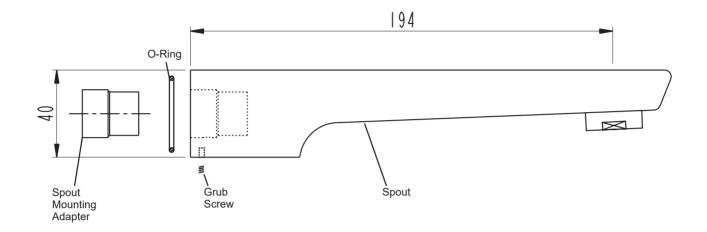

WARRANTY

Please refer to our website for warranty information: www.foreno.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

Chrome-plated finishes should not be cleaned with astringent, abrasive or citric cleaners. A soft, damp cloth is recommended for cleaning. Mild soap solutions can also be used on occasion.