

Vista™

Suspended Acoustic Panel Series



Product overview

The Vista™ range of suspended panels create a modern aesthetic with excellent acoustic performance.

Available in a range of sizes, colours and designs, Vista panels are designed to effectively reduce reverberation across a broad range of frequency.

Each Vista Panel includes an adjustable suspension kit, requiring minimal assembly for installation, that allows it to be suspended at a range of height.

Vista Panel can be used to mask services above, as a cloud-like feature in open spaces, or to effectively position over large desks and work spaces.

Applications

Ceiling:
Office Interiors, Showrooms, Hospitality, Education and Residential.

Benefits

Precise Installation

Vista Panels come with everything needed for installation, including full-size and light-weight template for quick alignment of panel and fixing locations



Better Spaces

Improved acoustics: audibly reduces reverberation time


Visual Impact: ten standard designs and a variety of available material colours offering ~78% light reflectance. Panels can be subtle or a feature design. Ask us about customisation

Future Proofing


Easy to remove. Durable panel construction with high impact resistance provides long-term stability and performance

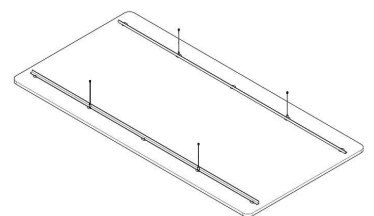

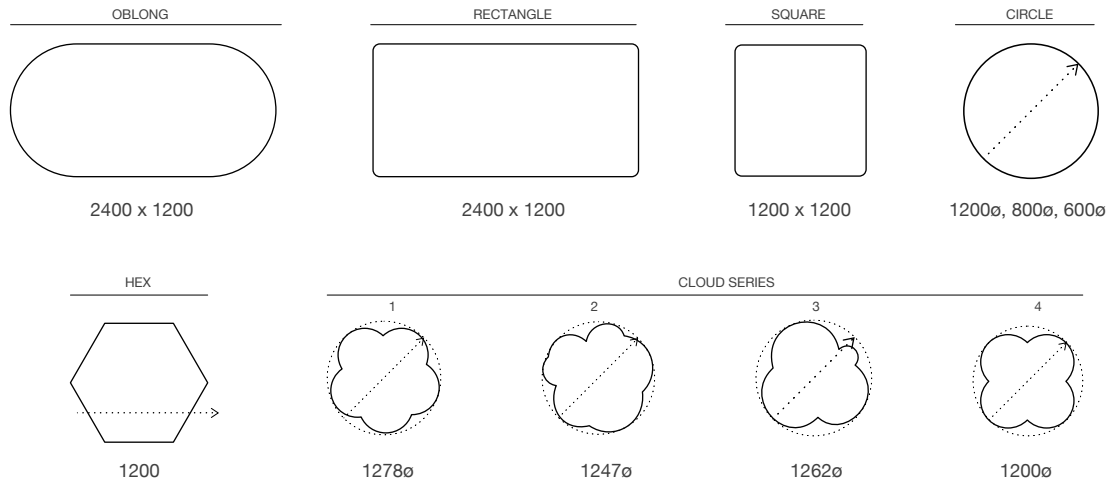

Suspended Acoustic Panel Series





*Installation as per DBSORB™ acoustic systems recommendations. Installation instructions are available on our website and in each pack.
*Options available for direct fix.


-  **Thickness:**
24mm


-  **Custom prints**


-  **NRC 1.0**
NRC 0.7 - NRC 1.0

-  **Composition:**
100% PET (up to 60% recycled content)

-  **Fire rating 24mm:**
ASTM E-84-17: Class A, FS:5 - SD:65
EN 13501-1:2007+A1:2009: B - s1, d0

-  **No loose fibres**

-  **Antibacterial**


-  **Environmental:**
Global Recycled Standard (GRS) 4.0
OEKO-TEX® Confidence In Textiles – STANDARD 100
Tested for harmful substances Annex 6**
Low VOC



2400 x 1200 Acoustic Performance*

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
150mm gap	0.39	0.8	0.99	0.86	0.94	0.98	0.9

*Acoustic Data based on 2400mm x 1200mm with 150mm suspension

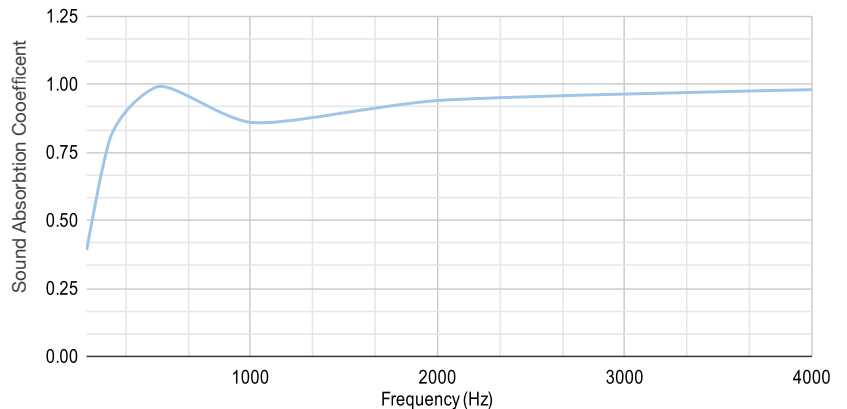

Metric Sabine per Unit:
Average 2.5 - 3.3*

*Direct Fix at 800mm suspension



DBSORB Ltd Acoustic Systems
Phone: (+64) 09 553 6775
Email: sales@dbsorb.co.nz www.dbsorb.co.nz
Address: 91b Morrin Rd, St. Johns, Auckland 1072
Copyright © 2022 DBSORB Ltd
All Rights Reserved

