
Luxury Vinyl Tile

Batiste[™] Specifications

Style Number	BBAST0136V
	LVT 5 mm
Tile Size	18 in (45.7 cm) (w) x 36 in (91.4 cm) (l)
Gauge Total Thickness	0.2 in (5 mm)
Wear Layer Thickness	22 mil (0.55 mm)
Install Type	Free Lay
Maintenance	Inherent No Wax Surface
Pieces per Carton	6 pieces
Coverage per Carton	27 ft² (2.51 m²)
Weight per Carton	49.5 lbs (22.45 kg)
Classification	ASTM F1700, Class III Type B
Dimensional Stability	ASTM F2199, < 0.02 in (0.5 mm)
Indoor Air Quality	FloorScore™ Certified

Recommended Installation Layouts for Adhesive & LVT (5 mm) Free Lay 18 in x 36 in:

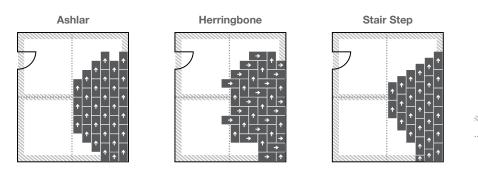

One foot strips of adhesive

··· Center points of room adjusted if necessary to ensure no perimeter pieces are less than half a tile.

Installation: All Batiste products must be installed by flooring installers who are professionally trained and experienced in current techniques and industry accepted standards for professional installation of vinyl tile flooring. Please refer to the current issue of Bentley's Batiste LVT Installation Guidelines: Plank and Free Lay.

Adhesives: All Batiste products must be installed with adhesives purchased through Bentley, and matched to the requirements of Bentley for flooring material, site and project conditions. Please refer to the current issue of Bentley's Batiste LVT Installation Guidelines: Plank and Free Lay.

Maintenance: Please refer to the most current issue of Bentley's Batiste LVT Maintenance Guidelines: Plank and Free Lay.

Warranty: Product warranted in accordance with the terms and conditions of Bentley's standard printed warranty in effect at time product is sold. All other warranties, including without limitation any implied warranties of merchantability or fitness for a particular purpose are hereby disclaimed. For complete warranty information, please refer to Bentley's Batiste LVT Limited Warranty. ©2020 Bentley Mills, Inc.

