



Frieze



Broadloom

**HERITAGE**<sup>TM</sup>  
CARPETS

Elegance & Comfort in Modern Living

**LAVETTE**<sup>TM</sup>

368-CAMEL  
501-BRIGHT RED



367-MEDIUM BEIGE  
800-BLACK

# Mix & Match



456-SILVER  
457-BROWN



367-MEDIUM BEIGE  
502-BURGUNDY




# Mix & Match



361-ANTHRACITE  
456-SILVER




700-DARK BLUE

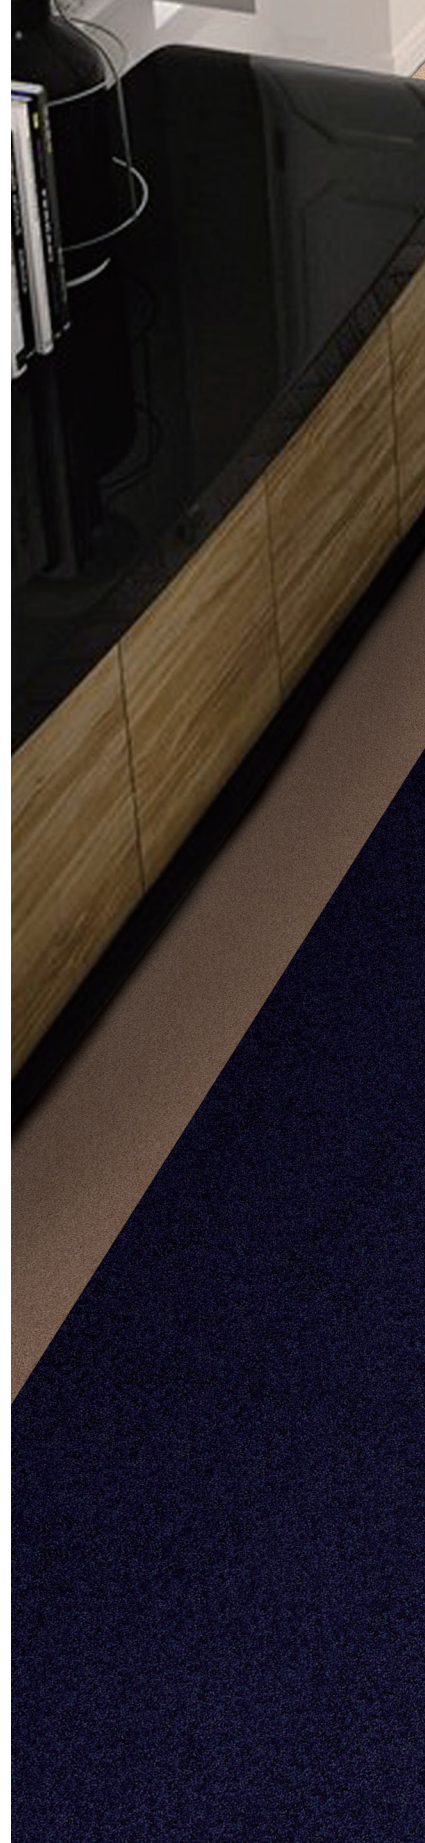

Rain, mud, snow. Dogs, kids, guests. There's always something coming for your carpet = but when your carpet has built-in Scotchgard™ Protection, you're ready for it all.


### How it works

The science behind the magic




### What to know

What sets us apart



**Repels**  
Spills stay on the surface.



**Resists**  
Dirt won't adhere to the fiber.



**Protects**  
Deep down protection from top to bottom of the fiber.



**367-MEDIUM BEIGE**  
**700-DARK BLUE**



- 100% Solution Dyed Nylon •
- Stain-Resistant •
- Anti-Static •
- Flame-Retardant •





LOGO

ANNE TRUIT

ARCHIST

800-BLACK



501-BRIGHT RED



457-BROWN

# LAVETTE

## SWATCHES



700-DARK BLUE



361-ANTHRACITE




367-MEDIUM BEIGE



368-CARMEL



456-SILVER



457-BROWN



501-BRIGHT RED



502-BURGUNDY



800-BLACK

## LAVETTE Specifications

|                               |  |
|-------------------------------|--|
| Construction                  | 1/10" Tufted Cut Pile Frieze                       |
| Yarn Composition              | 100% Solution Dyed Nylon                           |
| Yarn Count                    | 1440 / 2 ply                                       |
| Tufted Pile Weight            | Ca. 1085 g/m <sup>2</sup> (32 oz/yd <sup>2</sup> ) |
| Total Weight                  | Ca. 1950 g/m <sup>2</sup> (58 oz/yd <sup>2</sup> ) |
| Pile Height                   | Ca. 5.7 mm (+/- 0.5 mm)                            |
| Total Height                  | Ca. 8.2 mm (+/- 0.5 mm)                            |
| Stitch Rate                   | 13 per inch  |
| Density                       | 5133 oz/yd <sup>3</sup>                            |
| Primary Backing               | PP Woven Cloth                                     |
| Secondary Backing             | ActionBac®   |
| Standard Roll Size            | 3.66m (+/-2%) x 30m (+/-2%)                        |
| Stain, Oil & Water Resistance | 3M Scotchgard™ Protector                           |

## Performance (as tested by ITTS Inc. USA)

|                         |                                   |
|-------------------------|-----------------------------------|
| Stain Resistance        | 7 (AATCC-175-2003)                |
| Static Control          | Pass - Max. 4 kV (AATCC 134-1996) |
| Tuft Bind               | Pass - 3.3 lbs (ASTM-D-1335)      |
| Dimensional Stability   | Pass - Max. 0.1% change (AACHEN)  |
| Indoor Air Quality      | CRI Green Label Plus              |
| Flammability            |                                   |
| - Pill Test             | Pass - 8 (ASTM-D-2859-96)         |
| - Radiant Panel         | Pass - Class I (ASTM-E-2648-10)   |
| - Smoke Density         | Pass - Max. 450 (ASTM-E-662-06)   |
| Colourfastness          |                                   |
| - to light              | Excellent - 5 (AATCC-16E)         |
| - to wet & dry crocking | Excellent - 5 (AATCC-165)         |
| - to Ozone              | Excellent - 5 (AATCC-129)         |

## Warranties

10 Year Carpet Wear Warranty  
Lifetime Antishock Carpet Warranty  
Ideal for Contract Use.

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing. Where seaming is necessary, a seam sealant must be used for all such installations. Due to dye lot variations, actual material may vary slightly from the samples. Chair pads are recommended to prevent premature wear of carpet.

