

IMPORTANT INSTALLATION NOTES:




AFTER INSTALLATION, PLEASE CHECK AND TEST:

1. Open the door leaf to its maximum opening angle and release. The door leaf should close fully into the door frame and overcome the latch.
2. Open the door leaf and rest the latch bolt on the striker plate. Release the door leaf. The door closer should have sufficient power to latch the door leaf closed.
3. Back-check provides a cushioning effect when the door is forcibly thrown open but does not serve as substitute for a door stop.



WARNING:

1. The mechanical hold open devices must NOT be installed on fire/smoke door.
2. Door closer should NOT be opened beyond the max. Opening angle of the fixing type you selected.
3. This door closer contains a powerful spring, which is inserted into the body under pressure. Under no circumstances should any attempt be made to dismantle the door closer.



MAINTENANCE:


1. Check the door closer every three months to ensure all fixings are secure and adjust, if necessary, adjust the closing and latching speed and check the doors functionality and smooth operation.
2. Apply light oil to arm knuckle joint and door hinges.

Froce	Max. door width	Max. door weight	Max. opening angle*	Number of turns	Direction
NO.1	750mm	20kg	180°	12	Anticlockwise
EN2	850mm	40kg	180°	6	Anticlockwise
EN3	950mm	60kg	180°	0	—
EN4	1100mm	80kg	180°	8	Clockwise


⊕ FACTORY PRE-SET *Pull Side Regular & Transom Fixing

Briton 1130B-T Door Closer


Regular Fixing-Pull Side

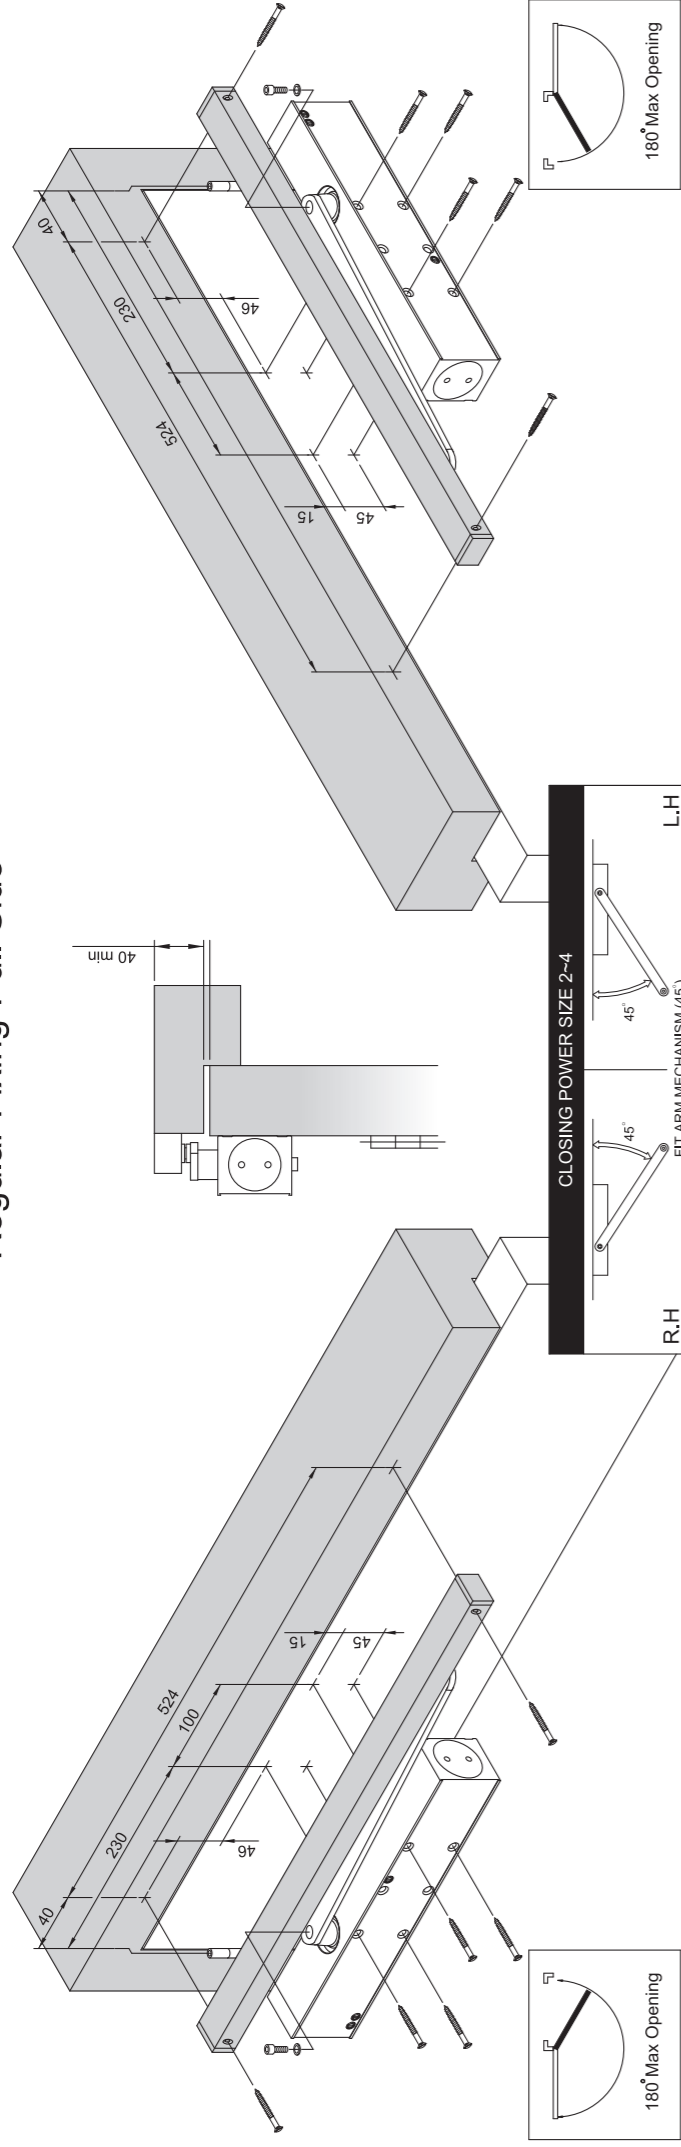

Transom Fixing-Pull Side

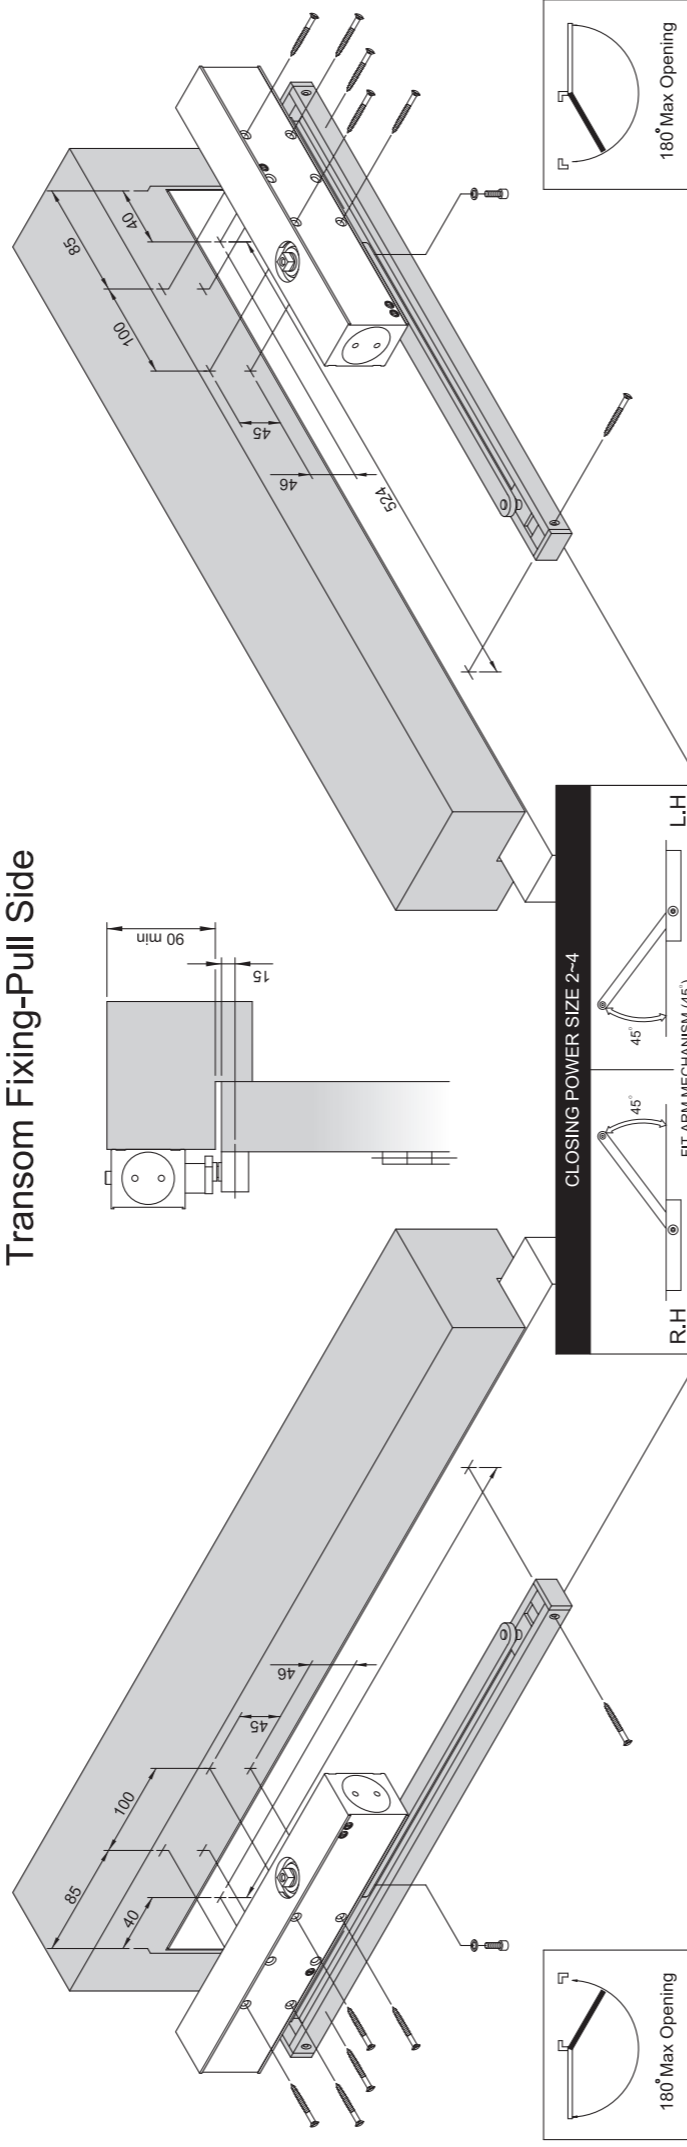

Regular Fixing-Push Side

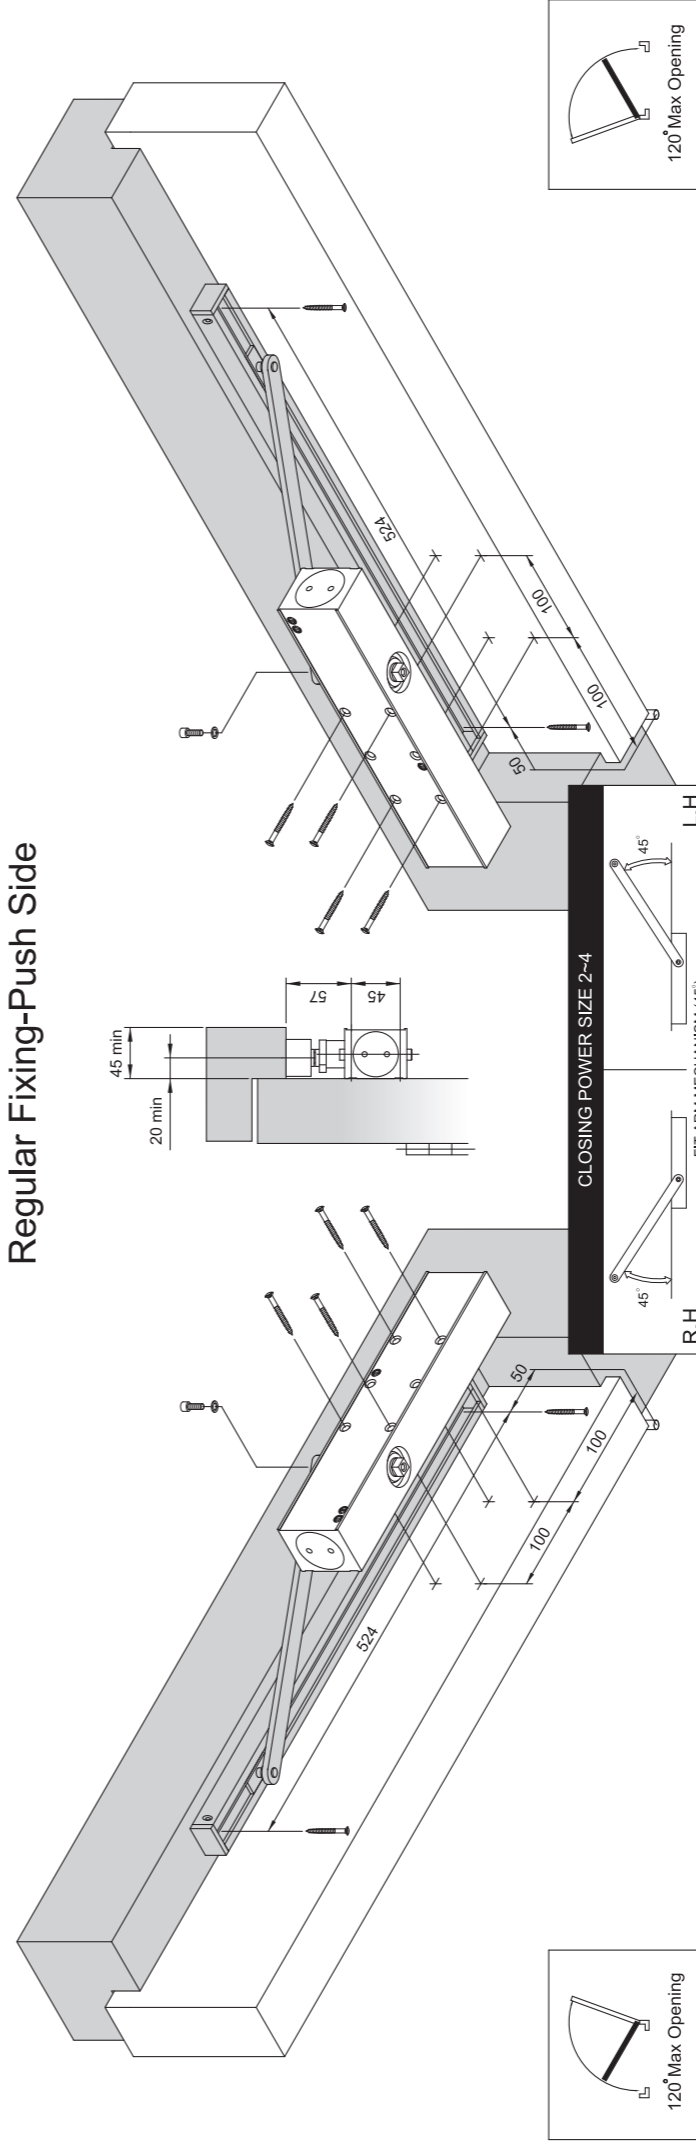

Transom Fixing-Push Side

