



FEL990

Electric Mortise Lock

The FEL990 Series Electric Mortise Lock is a true multi-functional locking device. It has been developed for simplicity - simplicity for the stockist, the installer and the end-user. Only two options are available – either monitored or non-monitored.



Features

The FEL990 Series locks can be easily site configured as follows:

- single-sided locking (Vestibule) / double-sided locking (Combination)
- power to lock (fail safe) / power to open (fail secure)
- left hand / right hand operation

FEL990M also includes comprehensive monitoring:


- Door position monitoring by reed switch
- Lock status monitoring by a combination of 3 locking parameters
 - locking bar (Hub/Handle/s locked)
 - deadlatching bolt (depressed)
 - latchbolt (out)
- Dual key override monitoring (KOM)
- Request to exit (REX) via hub/handle(s)
- LED indication

Warranties	
Mechanical	10 years
Finish	allegion.co.nz/finisheswarranty
Electronic	1 year

Technical specifications

Part Number	FEL990M	FEL990
Certifications / Approvals	C-tick Conforms when used with equivalent S3 keying system	
Function	Vestibule and Combination lock (field selectable of either/or both sides locked) Lock handed (Left Hand/Right Hand field selectable)	
Lock Operation	FAIL SAFE / FAIL SECURE adjustable on site – one product for both applications	
Voltage / Current	Multi-voltage - 12-24VDC / 350mA momentary, 100mA operating including LED furniture if applicable Reverse polarity protected Lock secure status and key override microswitch max. rating 500mA@30VDC Door status reed switch max. rating 100mA operating	
Monitoring (990 version only)	<ol style="list-style-type: none"> 1. Door position monitoring by reed switch 2. Lock status monitoring by a combination of <ul style="list-style-type: none"> · Locking bar (hub/handle/s locked) · Deadlatching bolt (suppressed) · Latchbolt (out)locking parameters 3. Dual key override monitoring (KOM) 4. Request to exit (REX) via hub/handle(s) 5. LED indication 	
Environmental	-20 to +60 degrees C	
Door Thickness	32 – 50mm (Extended spindles available for up to 65mm)	
Backset	60mm Optional: 70mm, 89mm and 127mm	
Cabling	3m cable with 12 pin plug supplied	
Standard Finish	Satin stainless steel (other finishes on request)	
Factory Configuration	Vestibule 60mm backset Fail safe Left handed Satin stainless steel finish	

Finishes

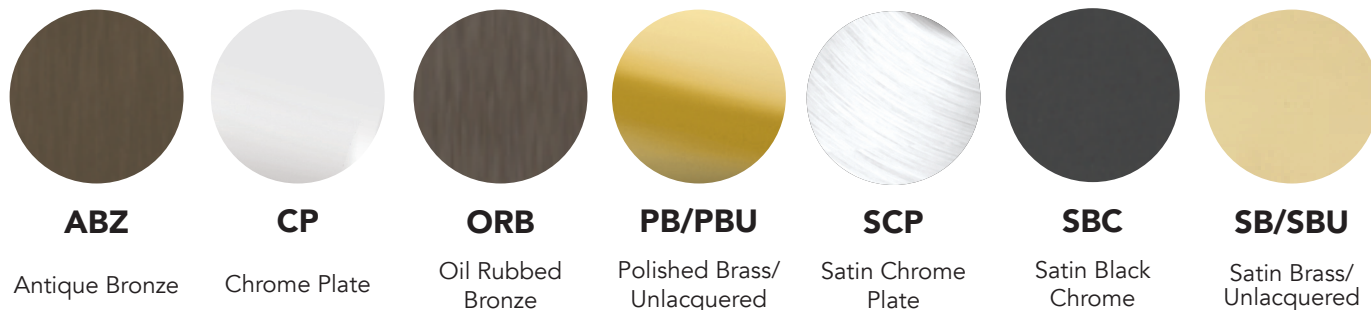

Testing and Compliance



Fire:

Tested to 4 hour on fire door assemblies as specified in AS/NZ 1905.1 – 1997 Part 1 Fire Resistant Doorsets



Durability:

Conforms to S3* (Security) and D3 (Durability) Australian Lock Standard (AS4145.2 : 1993)

