


| Specifications | Jacobsen | Shaw Pixel* & Shaw Pacific | | Tarkett | Tarkett Eclipse | Tarkett Primo |
|-----------------|---|---|---|---|---|---|
| | Acoustiwall | Ecoworx | Ecologix | iQ Optima | Premium Spirit | Premium |
| SIZE | 1.22 x 25LM | 610 x 610mm | 610 x 610mm | 2m x 25LM | 2m x 23LM | 2m x 23LM |
| PACK | Roll | 12 tiles (4.46m ²) | 12 tiles (4.46m ²) | Roll | Roll | Roll |
| THICKNESS | 10-12mm | 5.3mm | 9.0mm | 2mm | 2mm | 2mm |
| FIRE RESISTANCE | ISO 9705 Group 1-S | ISO 9239-1:2010 CRF 5.8 kW/m ² | ISO 9239-1:2010 CRF 7.7 kW/m ² | ISO 9239-1:2010 CRF 9.5 kW/m ² | ISO 9239-1:2010 CRF ≥ 11 kW/m ² | ISO 9239-1:2010 CRF 10.4 kW/m ² |
| ACOUSTIC | ISO 11654 NRC 0.40 | ISO 717-2:2013 26dB | ISO 717-2:2013 33dB | N/A | N/A | N/A |
| ENVIRONMENTAL | ISO 14001 Green Tag Level A Green Tag Phd Declare Red List Free | ISO 14001 GECA Declare - LBC Compliant Cradle to Cradle - Silver | ISO 14001 GECA Declare - LBC Red List Approved Cradle to Cradle - Bronze | ISO 14001 Green Tag Level A Phthalate Free Best Practice PVC | ISO 14001 Green Tag Level A Phthalate Free Best Practice PVC | ISO 14001 Green Tag Level A Phthalate Free Best Practice PVC |

* Recommended install for Pixel carpet tile is "quarter turn"
Refer to website for installation information www.jacobsen.co.nz

Jacobsen Acoustiwall

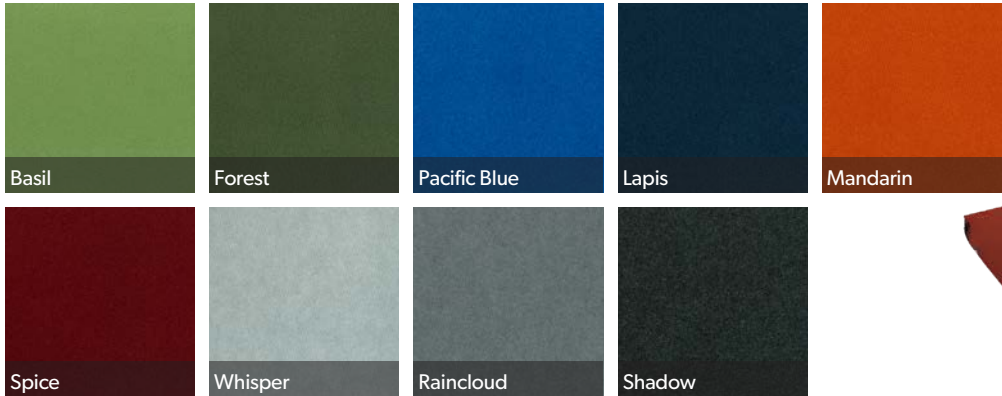

Shaw Carpet Tile | All colours available on Ecoworx or Ecologix cushion backing



Tarkett Vinyl

