



 JURALCO

## **JURALCO BANNETTE AWNING SYSTEM**

ISSUE 10-23 v1



## Juralco Bannette Awning System

Juralco Aluminium Building Products Ltd designs and distributes specialist aluminium joinery systems through a national network of franchised fabricators and agents.

For more than 25 years we have been at the forefront of specialist aluminium door and window products suitable for New Zealand joinery and building methods. Our comprehensive product range includes security and insect screens, balustrades and gates, shutters and awnings, shower screens, wardrobe doors and organisers and internal doors.

The Juralco Bannette Awning is a compact, ready-to-install, system designed for outside use anywhere protection is needed from sun or rain. All of the components are made of aluminium alloy or powder coated/galvanised steel forming a highly-resistant, lightweight, rust-proof construction. The awning is designed to adapt to all types of openings regardless of the dimensions. Installation is straightforward. Bannette awnings operation is either manual or by a tubular electric motor, fitted with remote control. A wide range of attractive mildew and UV resistant 100% acrylic fabrics are available, all with a 5 year guarantee.



Bannette Drop Arm Shade Awning

### Important information - Powder Coating systems.

**Powdercoat Systems** The new standard Dulux powder coating system used by Juralco is Duralloy Plus®. Also Duralloy® and Duratec®. Juralco Powder coated prices are for Duralloy Plus® and Duralloy® (same pricing). Duratec® prices on application. The following specs apply to Building Exteriors.

- Dulux Duralloy Plus® powder coating systems are suitable for properties greater than 10m from high tide level. Residential and Light commercial buildings, 3 levels max. Warranty 15 yrs
- Dulux Duratec® powder coating systems are suitable for properties greater than 10m from high tide level All Residential and Commercial buildings. Warranty 25 yrs.

**Attachment to structures** A PVC Tape or similar material spacer must be used to separate powder coated aluminium items from all concrete and steel structures. Failure to do so can lead to the chemicals in the structure affecting the powder coating, leading to corrosion.

**Swimming Pools** The chlorinated water in swimming pools can cause the deterioration of powder coated surfaces, leading to corrosion of the underlying surface. It is recommended that Powder coated surfaces be 1200mm min from a pool.

**Care** The Dulux powder coating warranty period is conditional upon the surface being maintained in accordance with the Dulux 'Care and Maintenance Instructions'. Download from Dulux or refer to the back page of this manual.

# Juralco Bannette Awning System - General and Index

## General Description - Pages 3 - 7

- There are two Juralco Bannette Awning systems - A Drop Arm shade awning and a vertical Drop Down curtain system.
- The Drop Arm system is available as a single unit up to 5mt wide.
- The Drop Down system is available as a single unit up to 4mt wide, and comes in three types.
- The basic Clear Drop system, no side guides. The horizontal drop bar is secured to the floor.
- The Clear Drop Zipped system, has side guides and side zippers. The sides and top are permanently installed into a face or reveal mounted extrusion. The Clear Panel can be unzipped at each side and manually rolled up. Retained with clear plastic straps. No floor clips needed. Draught proof.
- Typical applications include Decks, Bars, Shops, Terraces, or anywhere needing protection from the sun, wind or unexpected rain showers.
- Standard finishes - Aluminium Extrusions - Natural anodised. Cast aluminium items Bright Polished.

## Bannette Drop Arm Shade Awning - Pages 8 - 11

The awning is supplied pre assembled with all necessary brackets, awning roll and two arm units.

- **Axle Assembly** - Roller tube axle. Mounting brackets and axle holders.
- **Awning fabric** - Many styles available, all mildew, UV resistant and Scotchguard treated.
- **Arms** - Supplied with spring loaded arms to more evenly tension the fabric cover, and control movement in windy conditions. Four arm lengths from 750mm to 1500mm, mounting bracket attached.
- **Drive - Manual** - A gearbox fitted to the end of the roller tube assists the operator to raise/lower the curtain.
- **Drive - Motorised** - An inline tubular motor raises or lowers the awning automatically. Switch or remote wireless controls available.
- **Wind** - As for all Awnings, care must be taken when installing in Wind prone areas. A Volo wind sensor is strongly recommended.


## Bannette Clear Drop Down Awning - Pages 12 - 14

- The awning is supplied pre assembled with all necessary brackets, awning roll and tie downs.
- **Axle Assembly** - Roller tube axle. Mounting brackets and axle holders.
- **Awning fabric** - Clear plastic, or Fabric with sewn border in a selection of colours or a standard awning material.
- **Tie Downs** - A variety of clips are available.
- **Drive - Manual** - A gearbox fitted to the end of the roller tube assists the operator to raise/lower the curtain.


## The Banette Clear Drop Down Zipped Awning - Pages 15 - 16

- The awning is supplied complete with all necessary extrusion, awning roll and tie ups.
- **Awning fabric** - Clear plastic, or Fabric with sewn border in a selection of colours.
- **Track Extrusion** - A selection of, Natural anodized only, Black or White.
- **Tie Ups** - Clear Plastic straps and mounted clips. A variety of clips are available.


## Building Consent Guide - Page 17

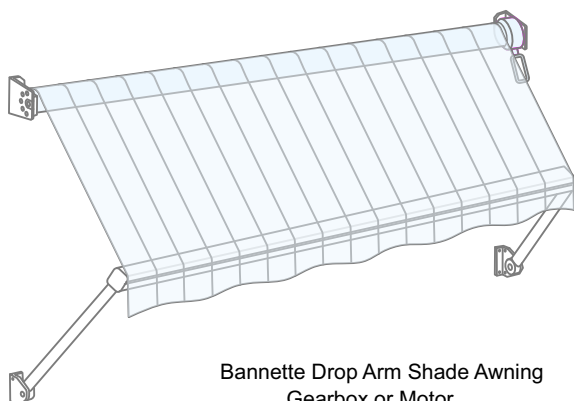

Bannette Drop Arm Shade Awning  
Gearbox or Motor

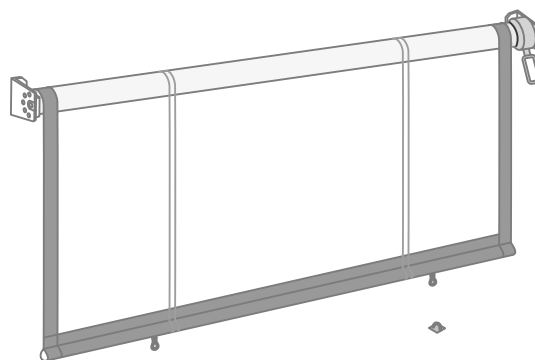


Bannette Clear Drop Shade Awning  
Gearbox only

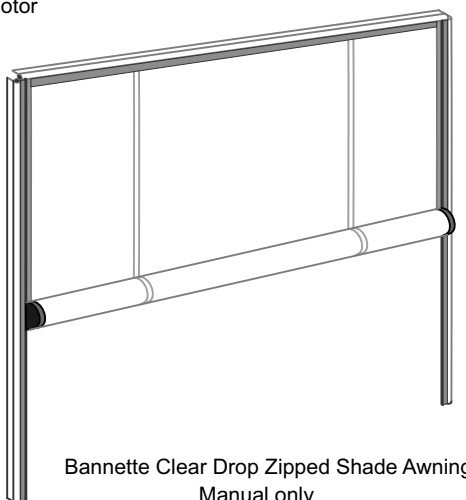

Bannette Clear Drop Zipped Shade Awning  
Manual only



## Juralco Bannette Awning System - General Descriptions

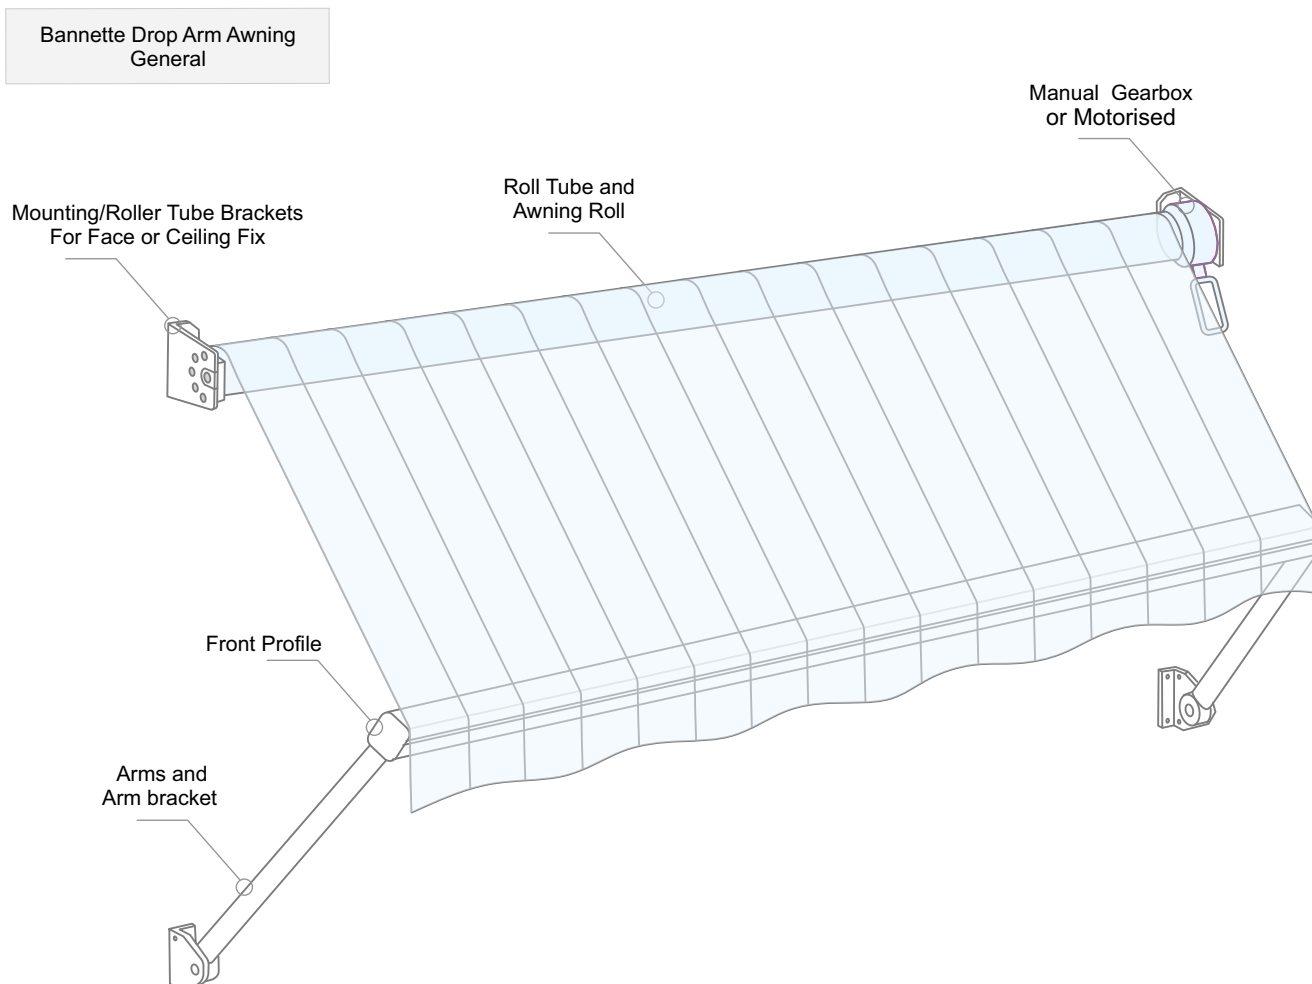

Bannette Drop Arm	
Overall Width, max	5.9m

The Juralco Bannette Drop Arm awning consists of :

**Mounting /Roller Tube Brackets**, made of cast aluminium suitable for face or ceiling installation. Supports the ends of the Roller Tube.

**Operation** by means of a gearbox/handle, R1/7 and R1/13 gearbox, or tubular motor (with or without manual override).

**Roller tube**, 2mm wall aluminium extrusion 80mm dia, with a groove to fix the awning fabric. One end equipped with the operating system and the other mounted with a circular shaft.

**Arms**, made of extruded aluminium profile connected to an aluminium pivot bracket. A tension spring integrated into the bracket guarantees a perfect tension of the fabrics in all positions.

Arm dimensions 1500 mm only

**Front profile**, from extruded aluminium, 45mm sq cross section to which are connected the arms, the fabrics cover and a valance.

**Awning Fabric - Dickson or Planosol** fabric ranges.

A selection of many fabrics in various colourways.

Awning fabrics will withstand wind, rain and pollution.

The fabrics are colour durable and resistant to most common chemicals, mildew, and UV degradation; all have a minimum five-year guarantee.

**Finishes**, Cast aluminium parts - bright Polished. Aluminium extrusions - natural anodised.

### OPTIONS.

**Controls** for the tubular motor; switch or wireless controls can be mounted alongside or at a remote location. Also available are remote wind actuated controls.


Refer page 7 for Fabric information

**Note:** It is recommended that eyelets are fitted to the front edge of the fabric, to promote draining.

## Juralco Bannette Awning System - General Descriptions

### Bannette Drop Down Awning General

No side guides, as shown below.

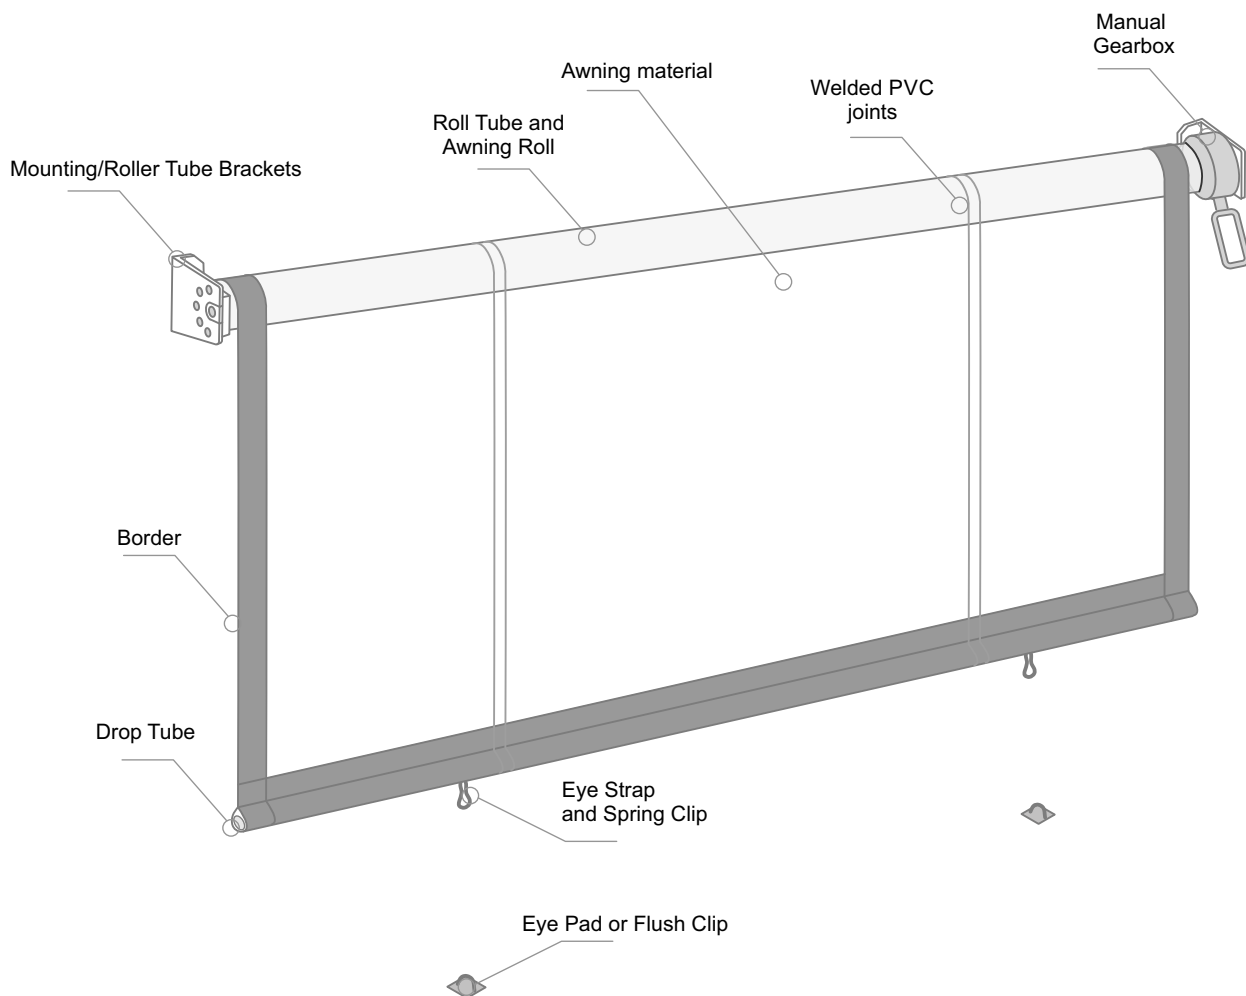

Bannette Clear Drop	
Overall Width, max	4mt
Overall Drop, max	3mt
Sq meterage, max	10sq mt

The Juralco Bannette Clear Drop awning consists of :

**Mounting /Roller Tube Brackets**, made of cast aluminium suitable for face or soffit installation. Supports the ends of the Roller Tube.

**Operation** by means of a R1:7 gearbox/handle, only

**Roller tube**, 2mm wall aluminium extrusion 80mm dia, with a groove to fix the awning fabric. One end equipped with the operating system and the other mounted with a circular shaft.

**Front profile**, from extruded aluminium, 32mm dia to which are connected the drop tube clips.

**Awning**, either a clear plastic panel, complete with sewn in coloured border, or a standard awning material.

**Awning Fabric - Dickson, Planosol or Solarview** fabric ranges.

A selection of many fabrics in various colourways.

Awning fabrics will withstand wind, rain and pollution.

The fabrics are colour durable and resistant to most common chemicals, mildew, and UV degradation; all have a minimum five-year guarantee.

**Finishes**, Cast aluminium parts - powder coated Grey. Aluminium extrusions - natural anodised.


**PVC Joints**, Max PVC width 1350mm. Wider curtains will have welded vertical PVC joints. Joints may only be vertical - horizontal joints void PVC manufacturers warranty.

Refer page 7 for Fabric information

## Juralco Bannette Awning System - General Descriptions

### Bannette Clear Drop Down Zipped Awning - General

Side guides and zipper, as shown below  
Manual lift/drop only.  
Plastic Tie ups are used to hold curtain roll in the raised position

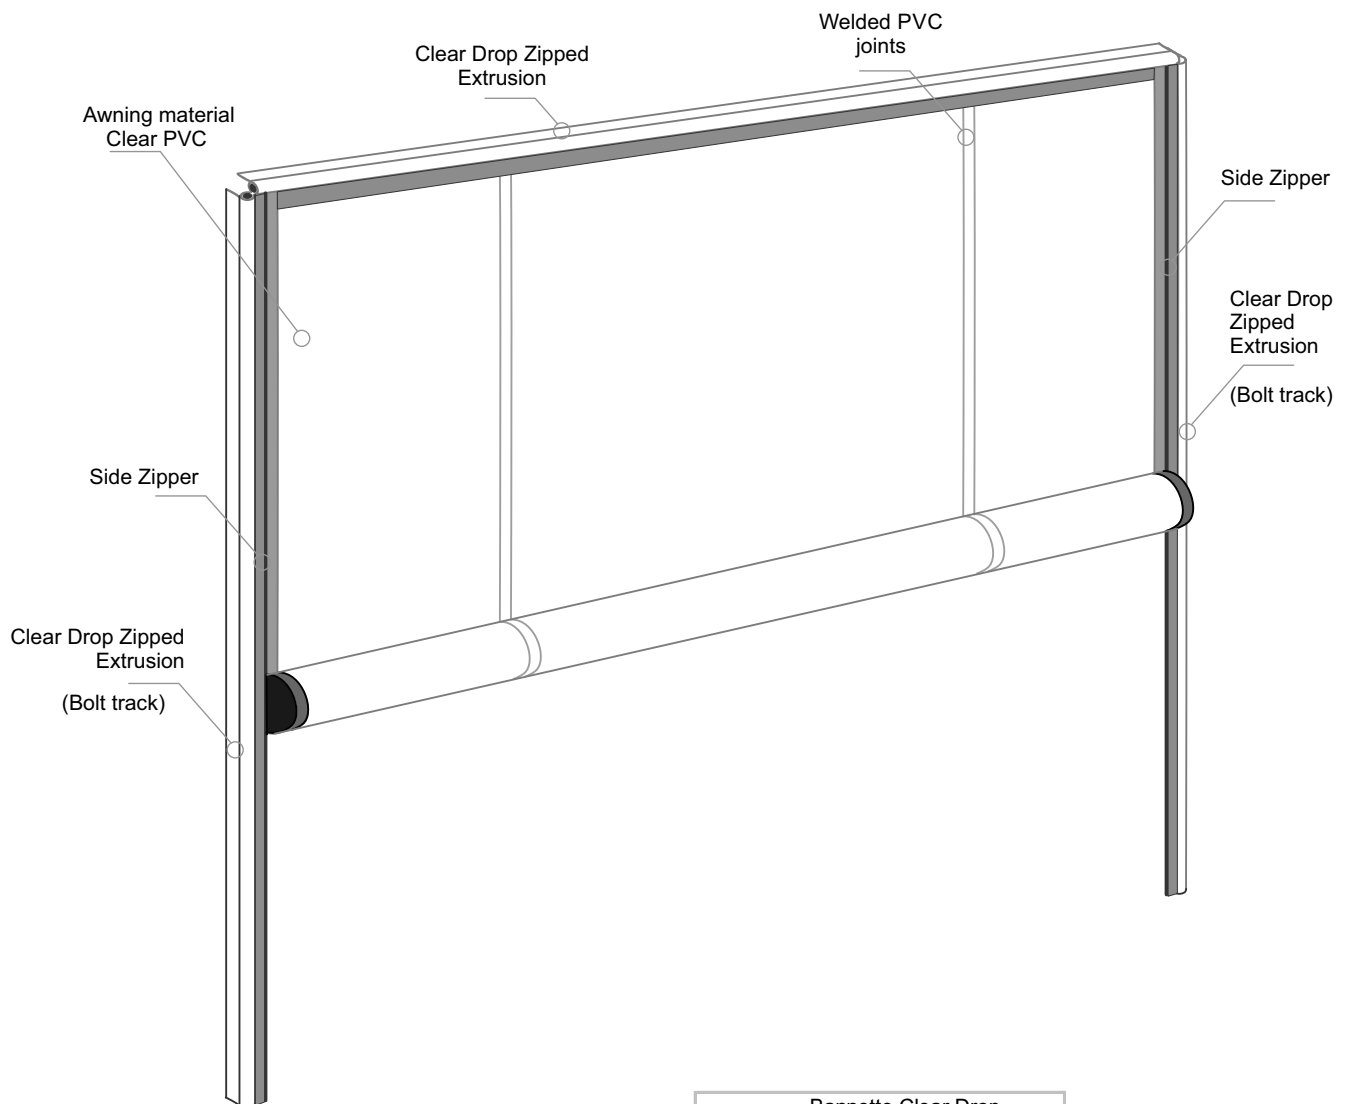

Bannette Clear Drop	
Overall Width, max	4mt
Overall Drop, max	3mt
Sq meterage, max	10sq mt

**Awning**, either a clear plastic panel, complete with sown in coloured border, or a standard awning material.

#### **Awning Fabric - Clear PVC only**

**Finishes**, Cast aluminium parts - powder coated Grey. Aluminium extrusions - natural anodised.

**PVC Joints**, Max PVC width 1350mm. Wider curtains will have welded vertical PVC joints. Joints may only be vertical - horizontal joints void PVC manufacturers warranty.

The Juralco Bannette Clear Drop Zipped awning consists of :  
**Clear Drop Zipped Extrusion, JDA 11079** made of aluminium suitable for face or soffit installation. Installed on 3 x sides. Awning has ropes sown in the Top and both sides. These are permanently attached to the extrusion.

Refer page 7 for Fabric information

## Juralco Bannette Awning System - Fabric Descriptions

### Fabric Range

#### Planosol Awning Fabric

Planosol is manufactured from 100% acrylic fibre and will retain a light fastness rating of 6-8 on a 1-8 scale.

Planosol is very tightly woven, with minimal light transmission, resulting in excellent UV protection. It has Ultraviolet Protection factor of 50+, maximum value granted for percentage of protection against UV ray and SPF 100. Planosol fabric will remain rot resistant for 5 years under normal exposure conditions.

#### Dickson Orchestra Awning & Outdoor Canvas

The outdoor fabric of choice when it comes to solar protection, offering long- term protection against UV rays, heat, glare and inclement weather. Its solution-dyed Sunacryl acrylic fibres and special Cleangard treatment give it exceptional long-term colour fastness and superior resistance to tearing, water damage and dirt.

Sunacryl, 100% solution-dyed acrylic: the colour is locked right into the very core of the fibres during manufacture (in contrast to the traditional yarn-dyeing process whereby colours are applied to the finished yarn and remain on the surface). Dyed all the way through, this type of yarn ensures exceptionally long-lasting, ultra vivid colours.

### Clear PVC Film


- A Thick hard wearing transparent PVC film. Principal use; for Clear Drop and Clear Drop Zipped
- Can be joined (vertical joints only) to 4mt wide max.
- Sewn on 50mm borders, Black or White

Clear Drop Material	Thickness	Spec
Polished, Flexible, Clear PVC Film x 1350mm wide	0.75mm	No Cadmium formulation. Incorporates UV Inhibitor



# Juralco Bannette Awning Systems - Drop Arm Awning Extrusions, Components

## Shade Awning Extrusions

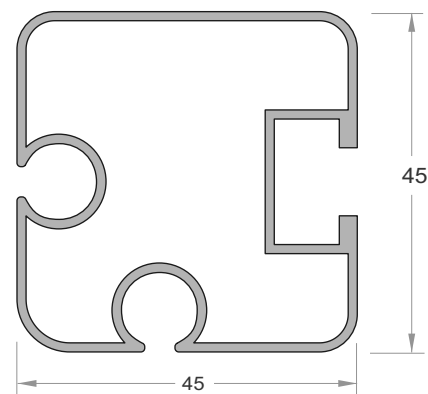

FRONT BAR  
JDA/110 71/4/NAT  
JDA/110 71/5.82/NAT

## Gearbox Handle




Gearbox Handle  
Clip, Pt No  
JDA/402 6500



JDA/403 0431 - 1200mm  
JDA/403 0592 - 1400mm  
JDA/403 0593 - 1600mm  
JDA/403 0595 - 2000mm

## Bannette Drop Arms, Sprung Loaded

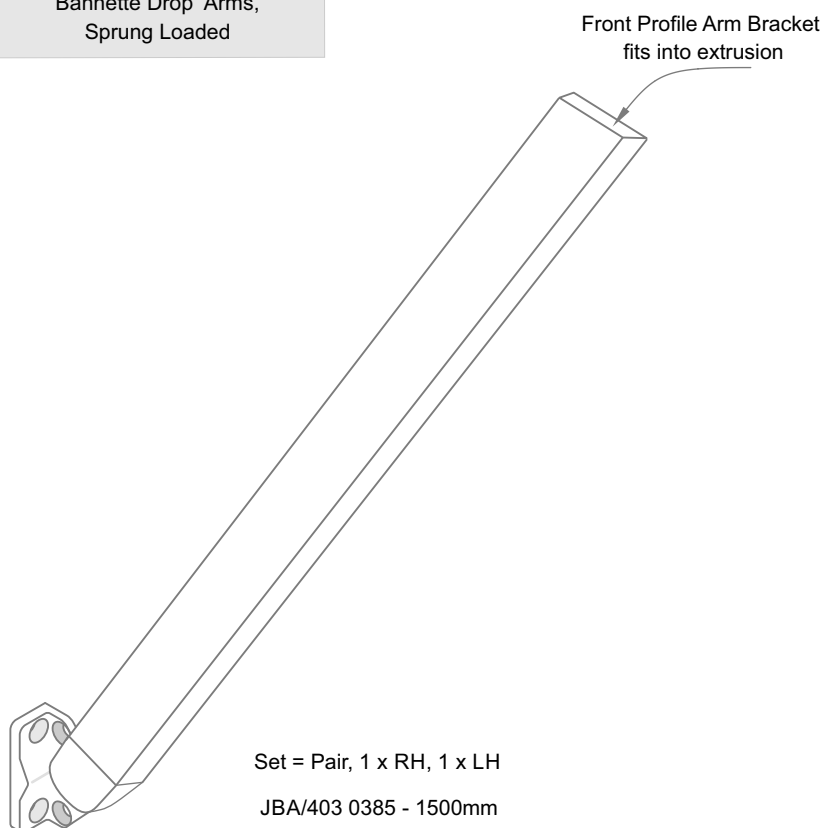

Set = Pair, 1 x RH, 1 x LH

JBA/403 0385 - 1500mm  
Available, also cut down as  
750mm, 1000mm and 1250mm arms



**JURALCO**

www.juralco.co.nz ph (09) 478 8018


**Juralco Bannette Awning System**

Issue 10-23 v1  
Page 8




## Juralco Bannette Awning System - Drop Arm Awning Components

Roller Tube End Cap  
JDA/403 1325



80mm dia, 13mm sq shaft

Roller Tube End Cap  
JDA/403 1326




80mm dia, 12mm dia shaft


Front Profile  
End Cap, Pt No  
JDA/314 05/PC




Front Profile with  
Spring  
JBA/403 0491



Roller Tube Support  
JBA/403 1542

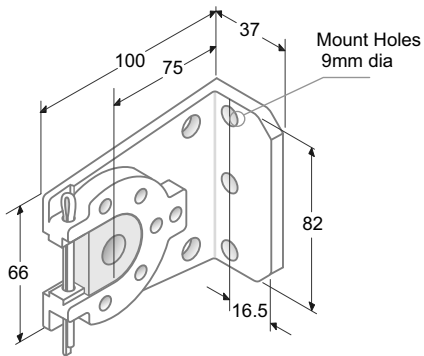

Gearbox, 1/7 reduction  
JDA/403 6607




## Juralco Bannette Awning System - Drop Arm Awning Measuring, Installation

### Drop Arm Measuring

#### Awning on site Check List:

- 1 - Check the desired width and installation area, making sure there are no obstructions.
- 2 - Check that the Mounting brackets have secure fixing points.
- 3 - Check the desired coverage making sure there are no obstructions.
- 4 - Check the stowed position.
- 5 - Check the desired awning material.
- 6 - Check the desired method of operation.  
Manual, 1:7 gearbox.  
Motor, choice of switch or wireless controls.  
Motor, optional extra sensor for wind.
- 7 - Check width, max overall = 5mt

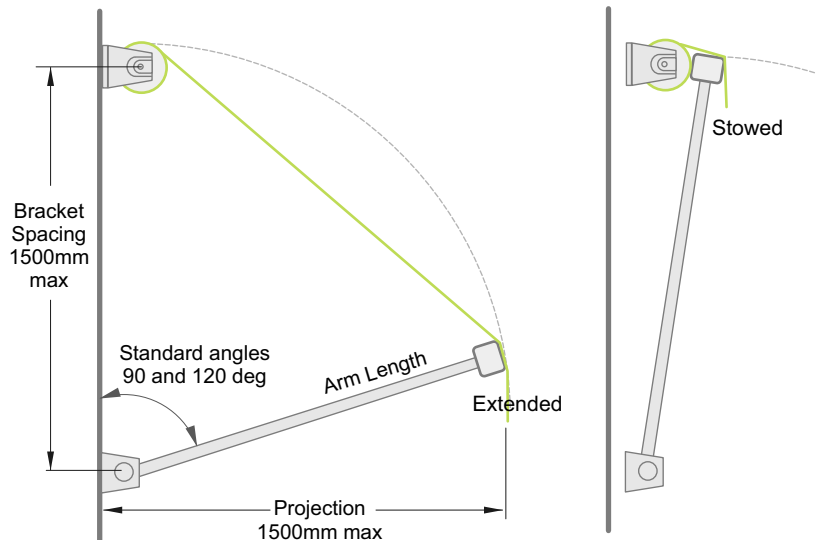


### Drop Arm Awning Installation

#### Note: Prior to delivering to site, unpack and check all items

- 1 - Carefully unpack and check for damage. Note - BE VERY CAREFUL THE AWNING IS NOT ACCIDENTALLY CUT during unpacking.
- 2 - Check the awning, making sure it has been made to site measurements.
- 3 - Mark out Roller Tube Mounting Bracket positions on Wall/Ceiling. Install. Note - Brackets must be firmly mounted into the building structure.
- 4 - Mark Arm Bracket positions on wall. Must be compatible with stowing position and vertically below the Roller brackets above. Install.
- 5 - Insert the Awning/Roller tube 13mm dia axle into the bearing. Attach the Gearbox or Motor to the other bracket.
- 6 - Set limits on motor if used. Follow manufacturers instructions.
- 7 - Insert and tighten all screws.
- 8 - Test the awning opens and closes easily.
- 9 - Always clean off all fingermarks, leave the site clean and tidy.

## Juralco Bannette Awning System - In Line Motors and Controls

### Tubular Motors JNICE ERA M 3017 and 5012

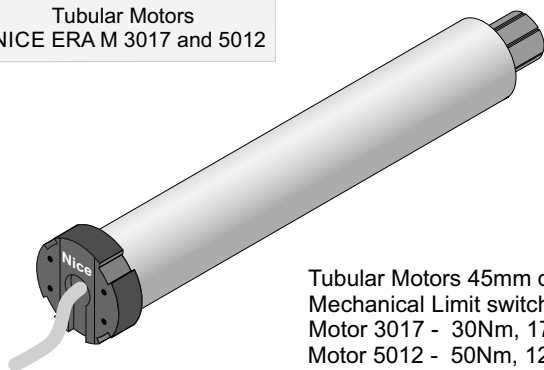


Tubular Motors 45mm dia  
Mechanical Limit switches  
Motor 3017 - 30Nm, 17rpm  
Motor 5012 - 50Nm, 12rpm

#### POWER CABLE

Length 2.5 m, 4 wires in cable



### Tubular Motors JNICE ERA PLUS 3017 and 5012

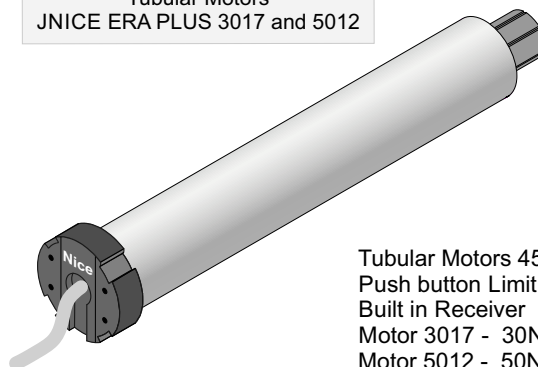

Tubular Motors 45mm dia  
Push button Limit switches  
Built in Receiver  
Motor 3017 - 30Nm, 17rpm  
Motor 5012 - 50Nm, 12rpm


#### POWER CABLE

Cable length 2.5 m, 6 wires in cable



### Motor Mount Brackets JNICE/BRKT/ERAM


For 45mm dia Motors  
Compact aluminium  
support. 2 x holes M6 at  
48 and 60mm CL

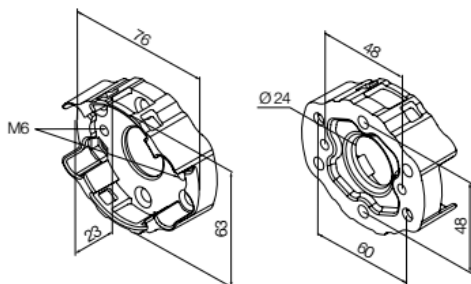

### Manual Controls Switch Controls

#### Wall Controls

3 position Rotary Wall Switch  
Up - Off - Close  
Cover Plate - SSW 770 CPSM  
Switch - SSW 770 RSB



### Wireless Remote Controls

#### Wireless Receiver




JNICE/BIDIAWNING. Nice controller for  
Wireless operation. Can be added to  
Switch operation and Manual override  
Motors to make for wireless control

### Drive Wheel and Crown JNICE/45ROUND78



### Wireless Remote Controls

#### Portable Wireless Transmitters



- P1 Portable transmitter to control 1 electrical load system or automation group
- P6 Portable transmitter to control 6 electrical load systems or automation groups for activation in single or multigroup mode
- P18 Portable transmitter to control 18 electrical load systems or automation groups for activation in single or multigroup mode

### Motor Remote Control Sensors



JNICE/WIND/S  
Volo Wind Sensor

Wind Sensor threshold has  
3 wind speed settings  
15, 30, 45 Kph



JNICE/NEMOVIBE  
Vibration Sensor

NEMO VIBE does not require any additional  
connections because it is battery powered.  
It screw attaches to the front of the awning.  
During windy conditions, a signal (adjustable)  
is sent via radio sensor to the motor mounted  
in the awning, which then retracts the awning.



**JURALCO**

www.juralco.co.nz ph (09) 478 8018

**Juralco Bannette Awning System**

Issue 10-23 v1  
Page 10

## Juralco Bannette Awning System - In Line Motors and Controls

### Manual Control HPM Rotary Switch Controls




One switch per Single Motor only.  
Use relays if more than single Motor  
**Motor fully tested  
and Limits set at factory**

Tubular Motors  
JNICE ERA M 3017 and 5012

### Motor Power Cable

Length 2.5 m, 4 wires in cable

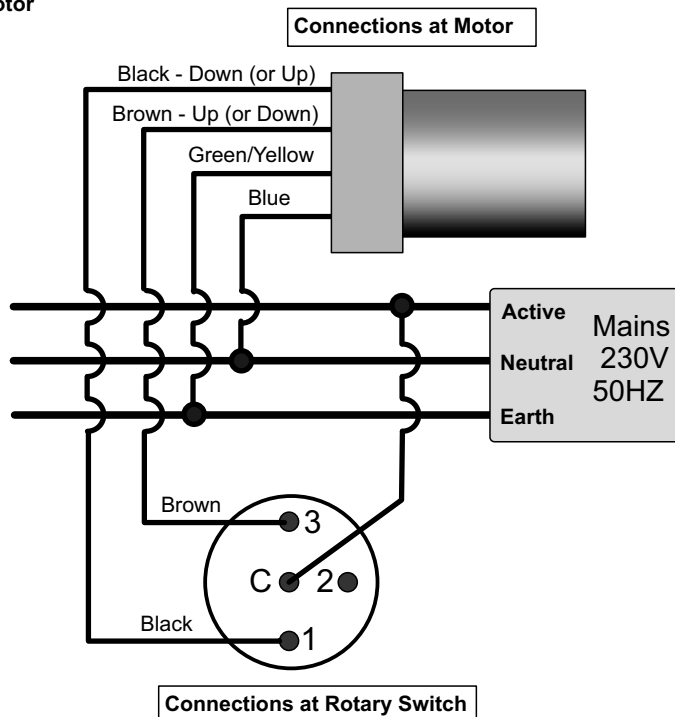

### Remote Control Wireless Controls TTBus

Volo Wind Sensor 15kph Limit set at factory  
(set limits available 5,10,15,30,45kph)  
**Motor fully tested  
and Limits set at factory**

Wireless Remote Control  
Portable Wireless Transmitters




P1 P6 P18

Tubular Motors  
JNICE ERA PLUS 3017 and 5012

### Motor Power Cable

Cable length 2.5 m, 6 wires in cable

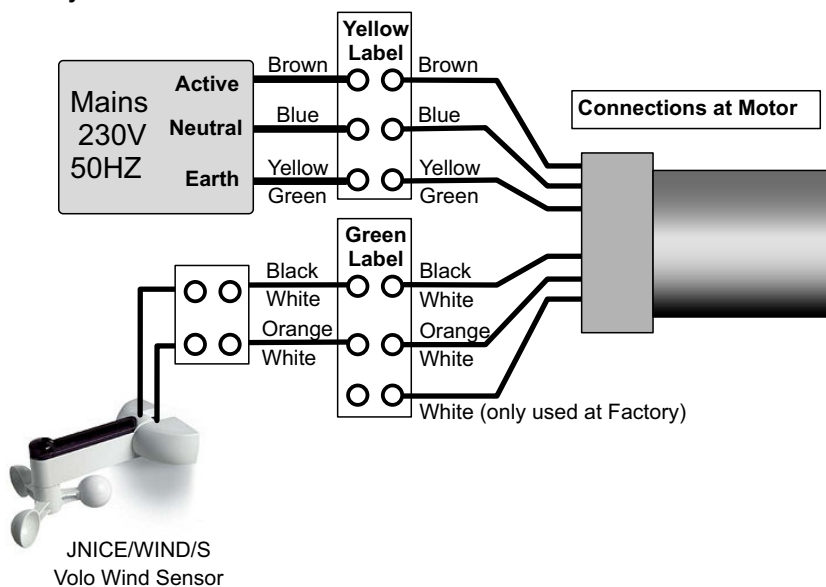



## Wind Speed Adjustment - Awning Retraction settings

At the factory, the intervention threshold is set at level 3 and to change it you must take the following steps

01. Keep the **n** key pressed and wait for the motor to perform 2 movements. Upon completion, release the key.
02. Keep the **t** key pressed and wait for the motor to perform 3 movements. Upon completion, release the key.
03. Briefly press the **s** key a few times, depending on the level you want to set for wind threshold.


- 1 press = wind, 5 km/h
- 2 presses = wind, 10 km/h
- 3 presses = wind, 15 km/h (factory settings)\*
- 4 presses = wind, 30 km/h
- 5 presses = wind, 45 km/h

After about 10 seconds, the motor performs the number of movements indicated by the level number selected

Note – If this does not occur, cancel the procedure.

This way, the adjustment is completed without changing the factory setting.


04. Keep the **n** key pressed and wait for the motor to perform 3 movements. Upon completion, release the key.

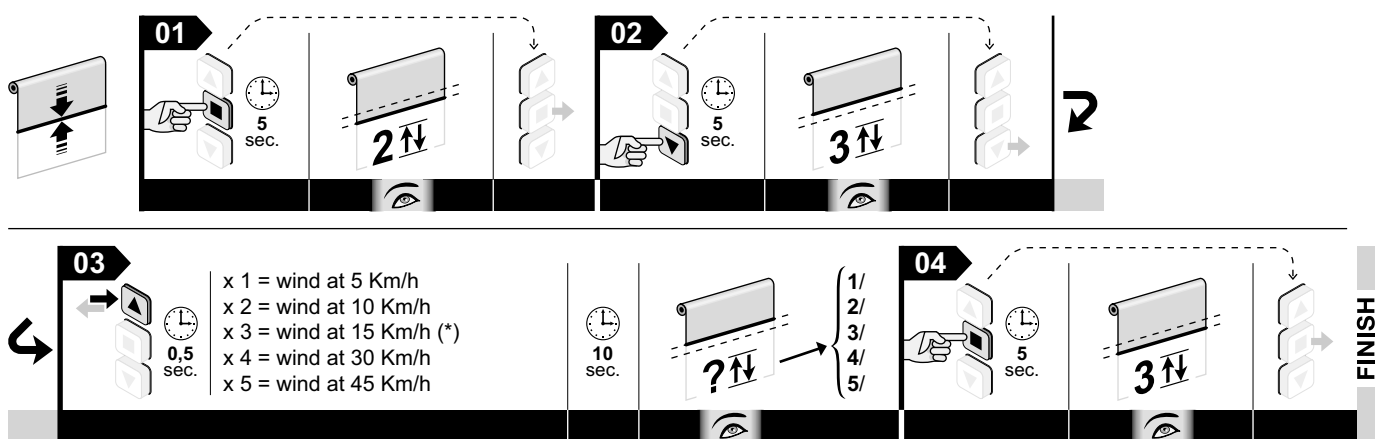

### Notes.

- When performing the procedure, you can cancel it at any time by keeping the **n** and **t** keys pressed simultaneously for 4 seconds.
- Otherwise, do not press any key and wait 60 seconds for the motor to perform 6 movements.
- If you use a sensor equipped with a "trimmer", you must read the sensor instructions and adjust the threshold directly on the sensor.

<b>BANNETTE</b>		Drop Arm Awning System - Order Form		<b>AW #</b>	
Customer			Contact		
Order No			Date		
<b>WO</b> Juralco		<b>SO</b> Juralco		<b>\$</b> Juralco	
Select/Enter Dimensions below. Enter details/selections into all boxes. Then scan and send to <a href="mailto:sales@juralco.co.nz">sales@juralco.co.nz</a>					
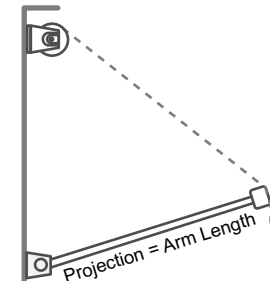
<b>1</b>	<p style="text-align: center;"><b>Unsuitable for use in Strong Wind Areas</b></p> <div style="display: flex; justify-content: space-between;"> <div style="width: 30%;"> <p>Select Projection then enter desired Overall Width dimension</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Select Projection (Arm Length)</th> <th style="width: 50px;"></th> </tr> </thead> <tbody> <tr><td>750mm</td><td></td></tr> <tr><td>1000mm</td><td></td></tr> <tr><td>1250mm</td><td></td></tr> <tr><td>1500mm</td><td></td></tr> </tbody> </table> </div> <div style="width: 30%;"> <p>Enter Overall width</p> <div style="border: 1px solid black; height: 20px; width: 100%;"></div> </div> <div style="width: 35%;"> <ul style="list-style-type: none"> <li>- Overall width 1000mm min, 5920mm max.</li> <li>- Awning - enough material supplied to arm horizontal.</li> </ul> </div> </div> <div style="text-align: right; margin-top: 20px;">  <p><b>Gearbox or Motor</b></p> </div>	Select Projection (Arm Length)		750mm		1000mm		1250mm		1500mm	
Select Projection (Arm Length)											
750mm											
1000mm											
1250mm											
1500mm											

<b>5</b>	Select Fabric Type and Colour <div style="display: flex;"> <div style="border: 1px solid black; padding: 2px; margin-right: 5px;">Planasol</div> <div style="border: 1px solid black; width: 30px; height: 15px;"></div> </div> <div style="display: flex;"> <div style="border: 1px solid black; padding: 2px; margin-right: 5px;">Dickson</div> <div style="border: 1px solid black; width: 30px; height: 15px;"></div> </div>	<p style="text-align: center;"><b>Specify Fabric Colour and Code</b></p> <div style="border: 1px solid black; height: 25px; width: 100%;"></div>
----------	---	--

<b>3</b> Select Gear Box or Motor <div style="display: flex; justify-content: space-between; margin-top: 5px;"> <div style="border: 1px solid black; padding: 2px;">Gearbox</div> <div style="border: 1px solid black; padding: 2px;">Motor + Switch</div> </div> <div style="border: 1px solid black; padding: 2px; margin-top: 5px; width: 100%;">Motor + Wireless</div>	<b>4</b> Select Motor or Gearbox End, viewed from Front <div style="display: flex; justify-content: space-around; margin-top: 5px;"> <div style="border: 1px solid black; padding: 2px;">LH</div> <div style="border: 1px solid black; padding: 2px;">RH</div> </div>	<b>5</b> If Gearbox, Select Handle Length <div style="display: flex; justify-content: space-between; margin-top: 5px;"> <div style="border: 1px solid black; padding: 2px;">1200mm</div> <div style="border: 1px solid black; padding: 2px;">1400mm</div> <div style="border: 1px solid black; padding: 2px;">1600mm</div> </div> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> <div style="border: 1px solid black; padding: 2px;">2000mm</div> <div style="border: 1px solid black; padding: 2px;">Wall clip?</div> </div>
---	--	---


**If Motor + Wireless selected, these options apply**

<b>6</b> Volo Wind sensor, if required <div style="display: flex; justify-content: space-between; margin-top: 5px;"> <div style="border: 1px solid black; padding: 2px;">Yes</div> <div style="border: 1px solid black; padding: 2px;">No</div> </div>	<b>7</b> NemoVibe sensor, if required <div style="display: flex; justify-content: space-between; margin-top: 5px;"> <div style="border: 1px solid black; padding: 2px;">Yes</div> <div style="border: 1px solid black; padding: 2px;">No</div> </div>	<b>8</b> Nemo Sun/Rain sensor, if required <div style="display: flex; justify-content: space-between; margin-top: 5px;"> <div style="border: 1px solid black; padding: 2px;">Yes</div> <div style="border: 1px solid black; padding: 2px;">No</div> </div>	<b>9</b> Additional Motor Remote Control? BIDI/Awning + Portable controller. Tick to select <div style="display: flex; justify-content: space-around; margin-top: 5px;"> <div style="border: 1px solid black; padding: 2px;">P1</div> <div style="border: 1px solid black; padding: 2px;">P6</div> <div style="border: 1px solid black; padding: 2px;">P18</div> </div>
---	--	---	--

<b>10</b>	Notes: <div style="border: 1px solid black; height: 300px; width: 100%; margin-top: 10px;"></div>
-----------	---

# Juralco Bannette Awning Systems - Drop Down Extrusions, Components

## Clear Drop Extrusions



FRONT PROFILE  
JA248

## Gearbox Handles




Gearbox Handle  
Clip, Pt No  
JDA/402 6500




JDA/403 0431 - 1200mm  
JDA/403 0592 - 1400mm  
JDA/403 0593 - 1600mm  
JDA/403 0595 - 2000mm

## Roller Tube End Cap JDA/403 1325



80mm dia  
12mm dia shaft  
(adjustable)

## Roller Tube End Cap JDA/403 1326



80mm dia  
13mmsq shaft

## Eye Strap JCA 2



Standard Attachment  
to underside of drop tube

## Eye Pad JCA 1



Fixed Full  
Hook Clip

## Spring Clip JCA 3




Carabineer Clip

## Pad Eye, Folding JCA 4




Flush Full  
Hook Clip

## Gearbox, 1/7 reduction JDA/403 6607



## Roller Tube Mounting Bracket JBA/403 1542

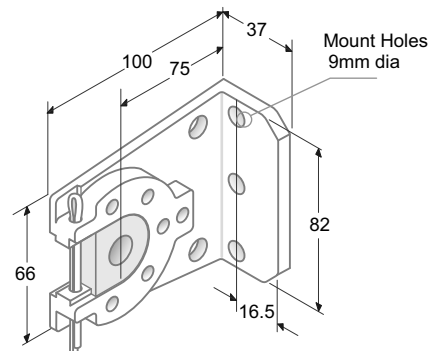

Suitable for Ceiling or Face Fix



**JURALCO**

www.juralco.co.nz ph (09) 478 8018

**Juralco Bannette Awning System**

Issue 10-23 v1  
Page 14




## Juralco Bannette Awning System - Drop Down Measuring, Installation

### Clear Drop Measuring

#### Clear Drop on site Check List:

- 1 - Check the desired width and installation area, making sure there are no obstructions.
- 2 - Check that the Mounting brackets have secure fixing points.
- 3 - Check the base clips operation.
- 4 - Check the desired awning material.
- 5 - Check end for gearbox operation (no motor option).
- 6 - Check overall width 4mt max, overall drop 3mt max, Area 10sqmt max.

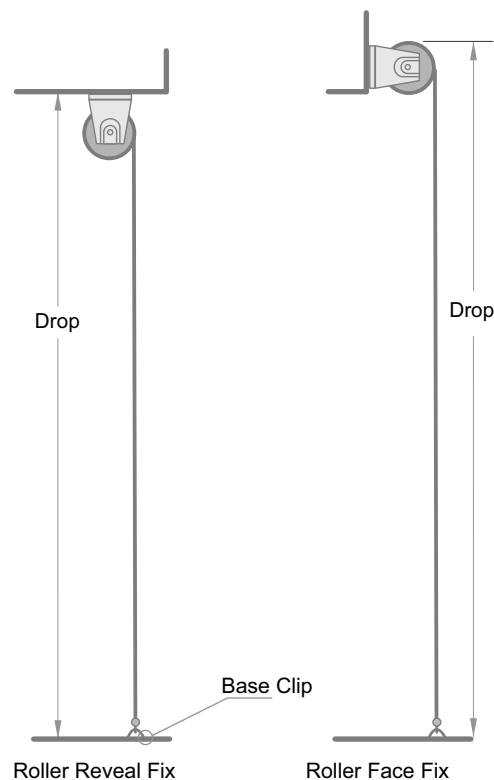

### Clear Drop Installation


- 1 - Carefully unpack and check for damage. Note - **BE VERY CAREFUL THE AWNING IS NOT ACCIDENTLY CUT** during unpacking.
- 2 - Check the awning, making sure it has been made to site measurements.
- 3 - Mark out Roller Tube Mounting Bracket positions on Wall/Soffit. Install. Note - Brackets must be firmly mounted into the building structure.
- 4 - Insert the Awning/Roller tube 13mm dia axle into the bearing. Attach the Gearbox/Motor to the other bracket. Screw in place.
- 5 - Insert and tighten all screws.
- 6 - Test the awning opens and closes easily.
- 7 - Mark position of Base clips. Install. Check awning clips down easily.
- 8 - Always clean off all fingermarks, leave the site clean and tidy.






## Juralco Bannette Awning Systems - Clear Drop Zipped Extrusions, Components

### Clear Drop Zipped Extrusion




11.2mm dia Bolt TRack  
JDA/110 79/5

### Clear Drop Zipped Components

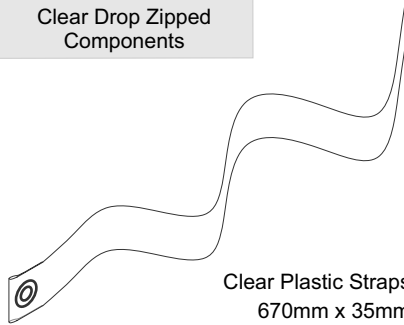


Clear Plastic Straps x 2  
670mm x 35mm  
Part No JBA/STRAP



Clear Drop Down Hooks x 2  
Base 35mm x 16mm  
JBA/FOLD/HOOK

### Clear Drop Zipped Curtain Features

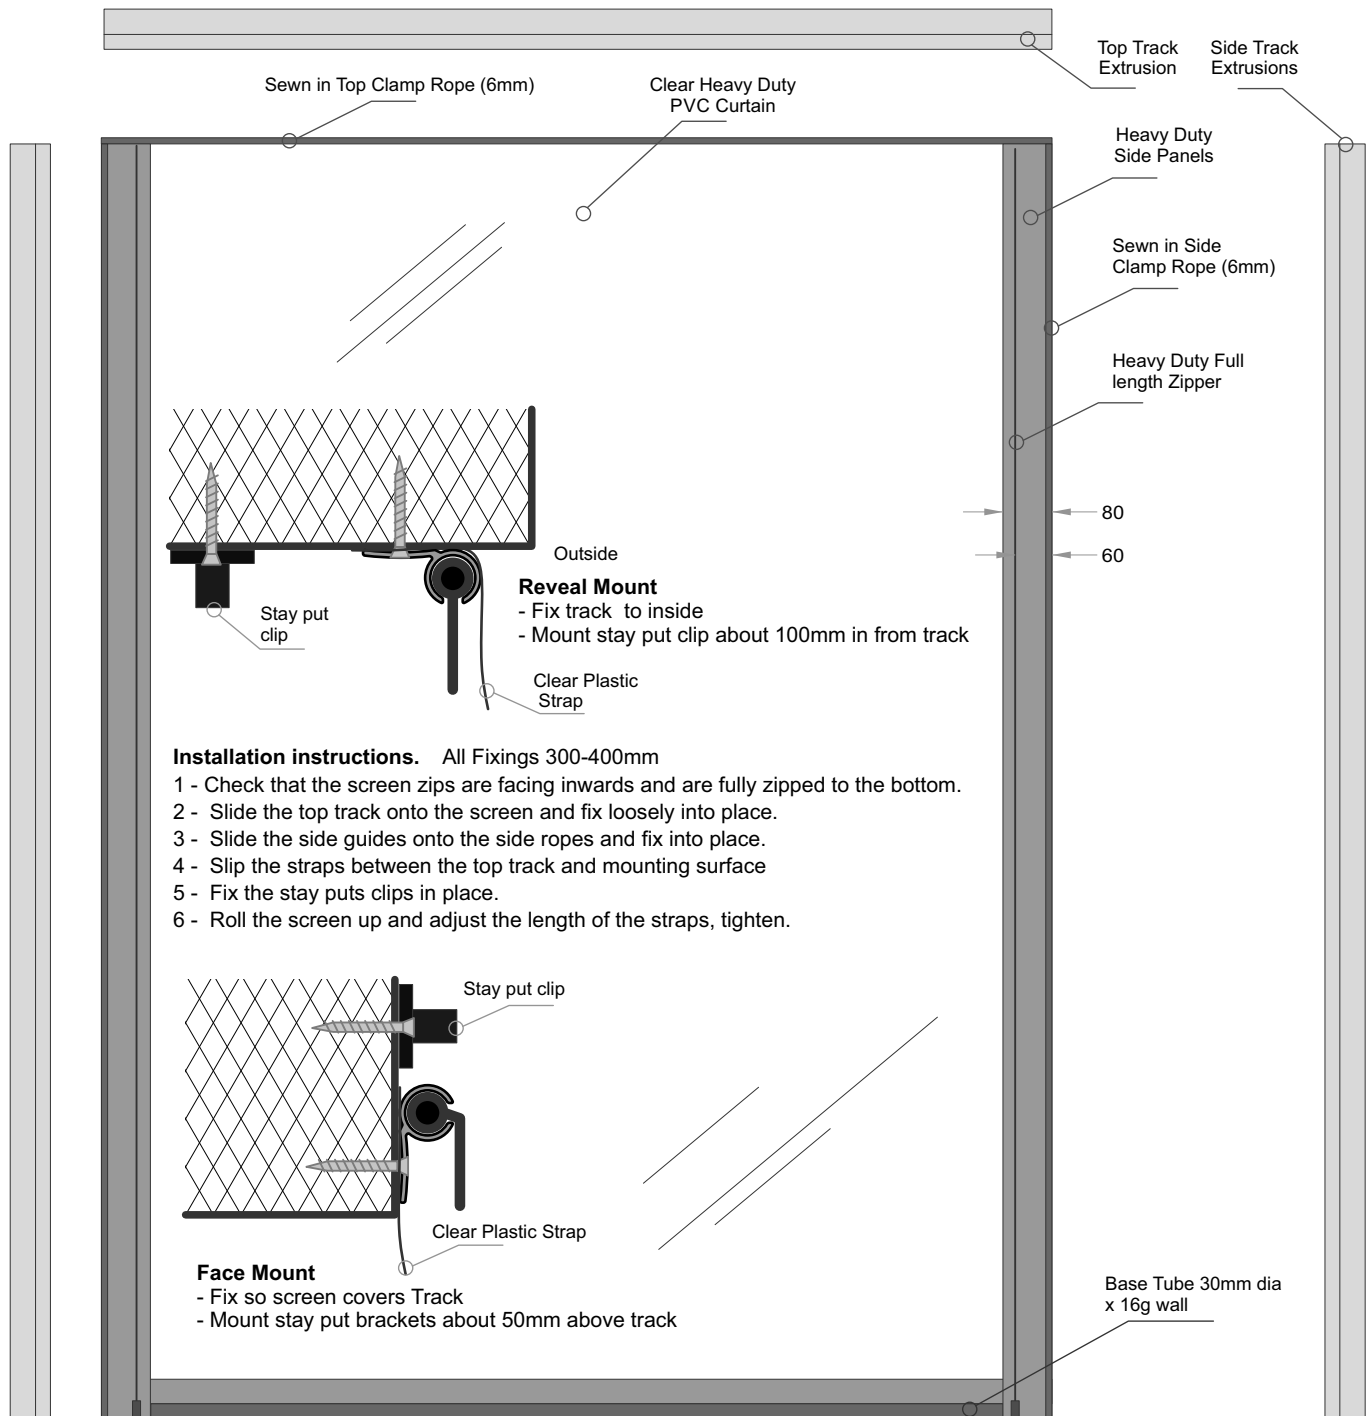


#### Installation instructions. All Fixings 300-400mm

- 1 - Check that the screen zips are facing inwards and are fully zipped to the bottom.
- 2 - Slide the top track onto the screen and fix loosely into place.
- 3 - Slide the side guides onto the side ropes and fix into place.
- 4 - Slip the straps between the top track and mounting surface
- 5 - Fix the stay puts clips in place.
- 6 - Roll the screen up and adjust the length of the straps, tighten.



<b>BANNETTE</b>		Drop Down Zipped System - Order Form		<b>AW #</b>
Customer		Contact		
Order No		Date		
<b>WO</b> Juralco		<b>SO</b> Juralco		<b>\$</b> Juralco
Select/Enter Dimensions below. Enter details/selections into all boxes. Then scan and send to <a href="mailto:sales@juralco.co.nz">sales@juralco.co.nz</a>				
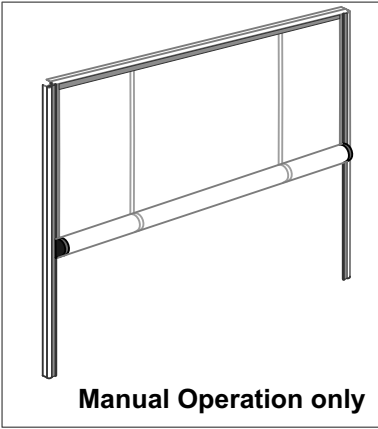
<b>1</b> <b>Unsuitable for Strong Winds</b> Enter Overall Dimensions Overall Height <input type="text"/> Overall width <input type="text"/>				 <p><b>Manual Operation only</b></p>
<b>For Clear PVC Only. For Manual operation only</b> Notes: - Overall width 4000mm max. Rope to Rope - Overall height 3000mm max. Top Rope to Bottom Tube - Overall area 10sqmt max - Clear PVC 1350mm wide. Vertical join details if necessary. - Includes 2 x PVC Clips, 2 x Stayputs, Rope Track and Bottom tube				
<b>2</b> Select Side Panel Colour Black <input type="text"/> Silver <input type="text"/> White <input type="text"/> Cream <input type="text"/>		<b>3</b> Select Zip Colour Black <input type="text"/> White <input type="text"/>		

<b>4</b> Notes:
-----------------

## Juralco Bannette Awning System - Building Consents

These two pages are an extract from the Department of Building and Housing

- Building Work that does not require a Building consent - pages 21 to 24. Online at [www.dbh.govt.nz/bc-no-consent](http://www.dbh.govt.nz/bc-no-consent)
- These are new exemptions dated December 2010

While every effort has been made to ensure that this information is correct at time of writing, it is provided for guidance only and Juralco will accept no liability for, nor warrants the accuracy of this guidance. It is the sole responsibility of the purchaser to confirm current status of consent requirements with the relevant territorial authority before purchase and installation.

### Awnings

#### Awnings.

Exemption (ja) of Schedule 1

A building consent is not required for the following building work:

- (ja) the construction, alteration, or removal of any fabric, glass, or metal awning on any building that-
  - (i) is on the ground or first storey level; and
  - (ii) does not exceed 20 square metres in size.

#### Guidance:

Awnings are usually coverings that are fabric, glass or metal. They are normally attached to the exterior of a building and are commonly used for protection from sun, rain or as a wind buffer (eg, a shadesail or window awning). The installation of awnings that are 20 square metres or less on any building at a ground floor or first floor level will comply with this exemption.

Size is a factor for large awnings, as they can damage the walls they are attached to or adjacent property or potentially injure people in high winds. Accordingly, any awnings larger than 20 square metres require a building consent.

This exemption relates to awnings which are currently attached or are to be attached to a building's external envelope or exterior surfaces.

Awnings may be removed, altered and constructed, providing this work complies with the Building Code. Particular emphasis should be placed on weather tightness detailing when removing, altering and constructing such structures. All mechanical connections (eg, nuts, bolts, coach screws etc) which penetrate the building envelope and provide support to awnings must provide adequate resistance to moisture getting into the structure. Please note, this exemption does not relieve the owner of any other requirements under the Resource Management Act 1991 and or local district plan rules and provisions.

#### Examples where this exemption could apply:

A shadesail is to be attached above a deck at first floor level of a dwelling. The proposed shadesail has a total area of 14 square metres, and meets all Building Code requirements.

The removal of an existing 12 square metres awning providing shade at the entry to a building (situated at first floor level).

#### Examples where building consent is required:

A glass awning is to be fitted to an apartment on the sixth floor of the building. Though the awning has a total coverage of 14 square metres, it is not exempt because of its height above ground and a building consent is required.

### Territorial Authority discretionary exemptions

#### Territorial authority discretionary exemptions

Exemption (k) of Schedule 1

A building consent is not required for the following building work:

- (k) any other building work in respect of which the territorial authority (or, as the case requires, the regional authority) considers that a building consent is not necessary for the purposes of this Act because that building work-
  - (i) is unlikely to be carried out otherwise than in accordance with the building code; or
  - (ii) if carried out otherwise than in accordance with the building code, is unlikely to endanger people or any building, whether on the same land or on other property.

#### Guidance:

Exemption (k) allows a discretionary decision to be made by a territorial authority (city or district council) or regional authority (regional council) to exempt proposed building work from the requirement to obtain a building consent in the circumstances specified in (i) and (ii), above.

Members of the public may ask their local council to consider their proposed building work under this exemption. However, the decision to allow any exemption under this part of Schedule 1 is totally at the council's discretion, based on the risk of building work not complying with the Building Code or endangering people or property.

Local councils should have procedures for making formal decisions under exemption (k) to exempt building work, that meet the specific criteria of (i) and (ii) above, from the requirement to obtain a building consent.

In all cases, the Department recommends that the decision, reason for the decision and the outcome of the decision be recorded by the local council and placed on the property file that relates to the building work.



**JURALCO**

[www.juralco.co.nz](http://www.juralco.co.nz) ph (09) 478 8018

**Juralco Bannette Awning System**

Issue 10-23 v1  
Page 19

# Juralco Bannette Awning System - Powder Coating Care and Maintenance

## Powder Coating Installation Care

### **Warning re use of solvents:**

- In some cases strong solvents are recommended for thinning various types of paints and also for cleaning up mastics and sealants.
- These can be harmful to the extended life of the powder coated surface, and must not be used for cleaning purposes.
- It is important to note that the damage will not be visible immediately and may take up to 12 months to develop.

If paint splashes or sealants and mastics need to be removed then the following may be safely used:  
Methylated Spirits, Ethyl Alcohol, Isopropanol or preferably a mild detergent in warm water.

### **Joinery Protection during Installation:**

All the activity on a construction site means that your powder coated items may get knocked or scratched, splattered with mortar, plaster, textured coating or paint during the later stages of construction.

Please ensure that all powder coated articles are masked or covered at this time. It is far easier to prevent accidents than to try and correct them. Should your joinery receive mortar or paint splashes see that these are removed before cure and follow the instructions contained in this brochure.

Typical sticker used to warn other trades of the need to protect and mask off powder coated joinery (applies to anodised joinery also)

**"IMPORTANT ALL TRADES"**  
This valuable aluminium joinery will suffer permanent damage from: plaster, mortar and paint splashes - Protect if splashes occur - Immediately wash down joinery with water or meths - Do not allow splashes to harden! - Do not use solvents! - Do not remove this label until final clean completed.

This photograph displays damage that has occurred on site, post installation. The photo of the masked joinery displays clear signs of damage that could have occurred were it not masked. Please ensure that your joinery is protected right through the entire construction process.



## Powder Coating Maintenance

### **External - Maintenance Program:**

To extend the life of external powder coated articles and to comply with warranty requirements for powder coated aluminium joinery, a simple, regular maintenance program must be implemented.

The effects of ultra violet light, atmospheric pollution, dirt, grime and airborne salt deposits will all accumulate over time and must be removed or surface staining and weathering will occur, leading to an unsightly appearance.

For external coatings, cleaning should take place every six months. In areas where pollutants are more prevalent, such as beachfront houses and industrial or geothermal areas, then a cleaning program should be carried out on a more frequent basis ie. every one to three months.

### **Cleaning your powder coating:**

1. Carefully remove any loose surface deposits with a wet sponge.
2. Use a soft brush (non abrasive) and a mild household detergent (do not use solvents) in warm water, remove dust, salt and other deposits.
3. Rinse off with clean fresh water.



### **Restoring weathered or scratched surfaces:**

Repair of Scuffed or Scratched surfaces

Dulux Spray Cans are available in all colour card colours.

Repair of Small Scratches or Chips.

Dulux Dabsticks are ideally suited for the repair of small scratches.

Dabsticks may not be available in all colour card colours.

Repair of Weathered areas .

Dulux Gloss Up is a light to medium cutting cream ideally suited for gloss restoration and has been specifically designed for this purpose.

Gloss Up contains no waxes or silicone and is a one step system.



Contact Dulux Powder Coatings , ph 0064 9 441 8244

All pages © Copyright Juralco Aluminium Building Products Ltd, 2023



**JURALCO**

www.juralco.co.nz ph (09) 478 8018

**Juralco Bannette Awning System**

Issue 10-23 v1  
Page 20