



## Juralco Bask Outdoor Living System - Single Bay Setout Configurations

Nominal Single Bay sizing: Overall Length up to 5.7m, Overall width up to 4m, ie Max louvre length is approx 3.75m  
Height to 2.7m, depending on wind zone and number of posts. Drop down screen, max width 4m  
Width always relates to the Louvre length direction

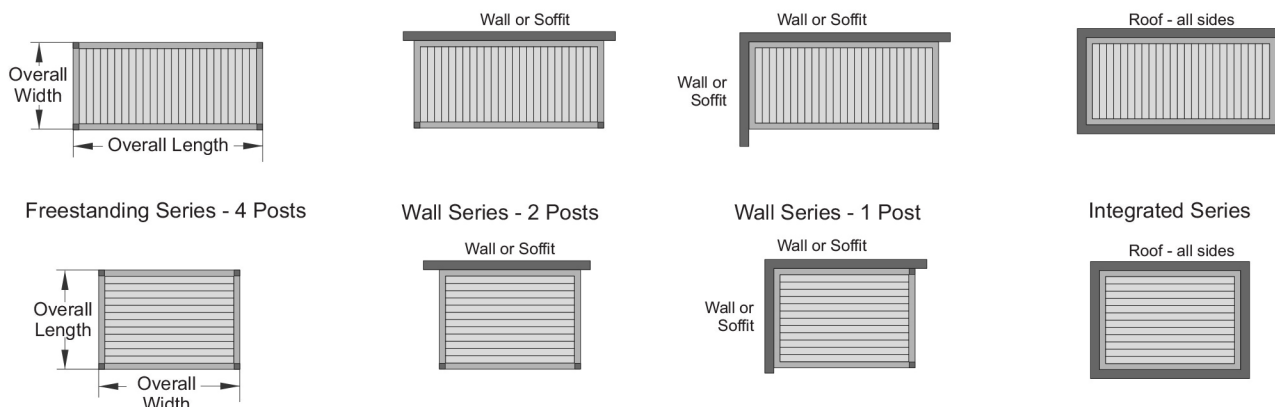

## Juralco Bask Outdoor Living System - Length (Frame) to Width (Louvre) and Height maximums per Bay to conform to NZS 3604:2011

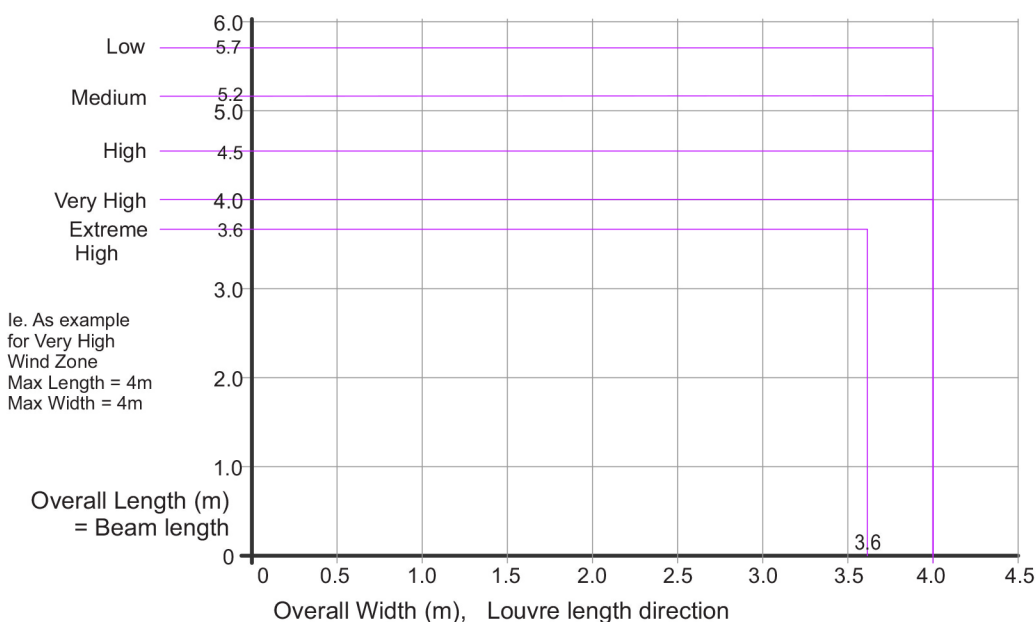


Single or Twin Bay  
for all Wind Zones

Free standing Series  
Post Height max = 2400

Wall Series  
Post Height max = 2700

Integrated Series  
Post Height max NA

## Juralco Bask Outdoor Living System - Footings to conform to NZS 3604:2011 Recommended Concrete Footing sizes (m) for Roof Areas

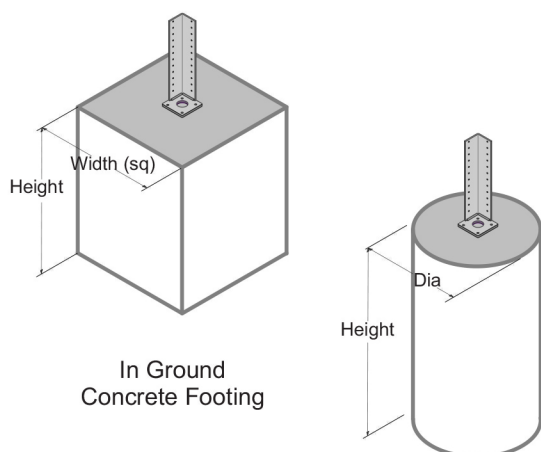

	Roof Area sqm		
	12sqm	16sqm	20sqm
<b>Wind High</b>	0.5sq x 0.6 deep	0.6sq x 0.6 deep	0.65sq x 0.6 deep
	0.43sq x 0.8 deep	0.5sq x 0.8 deep	0.56sq x 0.8 deep
	0.45dia x 1.0 deep	0.5dia x 1.0 deep	0.56dia x 1.0 deep
	0.4dia x 1.2 deep	0.46dia x 1.2 deep	0.52dia x 1.2 deep
<b>Wind Very High</b>	0.55sq x 0.6 deep	0.65sq x 0.6 deep	0.73sq x 0.6 deep
	0.5sq x 0.8 deep	0.57sq x 0.8 deep	0.64sq x 0.8 deep
	0.5dia x 1.0 deep	0.57dia x 1.0 deep	0.64dia x 1.0 deep
	0.45dia x 1.2 deep	0.53dia x 1.2 deep	0.58dia x 1.2 deep
<b>Wind Extra High</b>	0.63sq x 0.6 deep	0.73sq x 0.6 deep	0.83sq x 0.6 deep
	0.55sq x 0.8 deep	0.64sq x 0.8 deep	0.71sq x 0.8 deep
	0.55dia x 1.0 deep	0.64dia x 1.0 deep	0.71dia x 1.0 deep
	0.5dia x 1.2 deep	0.58dia x 1.2 deep	0.65dia x 1.2 deep

Note: Attach baseplate with 3 x M10 x 150 SS Studs + Epcon C6  
Ensure there is a EPDM layer between Baseplate and concrete

Note: Alternative, Concrete slabs 150mm thick equivalent to the above masses