


**DE740000**  
TEMPOSOFT  
TIME FLOW BASIN TAP

**DELABIE**

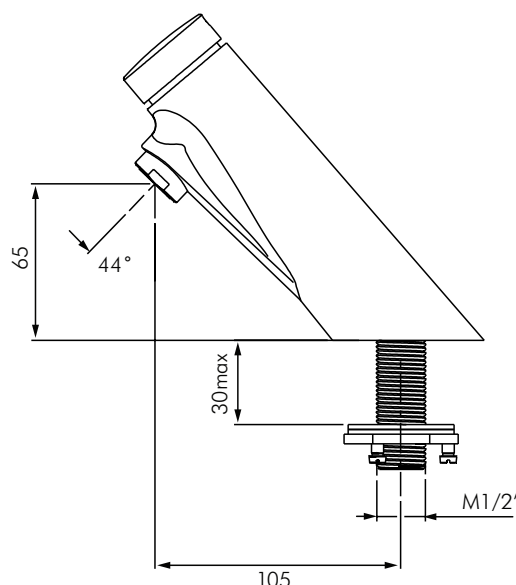

**DESCRIPTION**

DELABIE DE740000 is a deck mounted time flow basin tap with a soft touch operation. Soft touch operation allows users to press the control with no effort especially children, elderly or people with reduced physical ability. Time flow is ~7 seconds. Flow rate is pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome-plated solid brass body with scale-resistant aerator and M1/2" reinforced fixing.

Supplied with red and blue indicators.

We recommend installing a thermostatic mixing valve (see Water Tempering section).

**INSTALLATION**

- Deck mounted through Ø22mm hole.
- M1/2" water supply connection.
- Reinforced fixing by tightening the 3 stainless screws on the brass back-nut.
- For cold or tempered single water supply.
- Maximum Hot water temperature 55°C, recommended tempered supply of ~40°C.
- Flow rate pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min by using a 2.5mm Allen key directly on the flow straightener.

**MODELS**

**DE740000** - Standard model 3L/min - 6 star WELS rating.

**DE-SPACER** - Bush used on basins with Ø34mm hole to centre tap in place.