

RESIDENTIAL SLIMLINE CORRUGATE WALL CLADDING BARGE DETAIL FOR VERTICAL CLADDING ON CAVITY (KICK OUT)

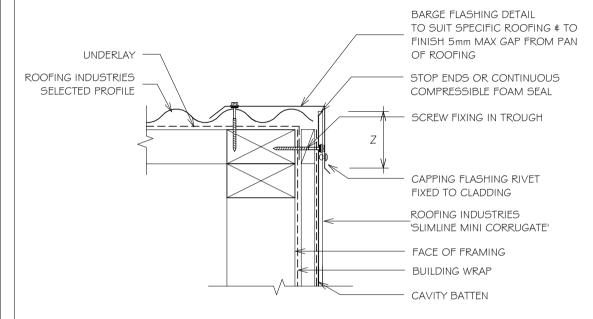



edge of vertical flashing

NOTES:

- These details are generally in compliance with E2/AS I and/or the NZ Metal Roof \$ Wall Cladding Code of Practice and in some cases specific details by 'Roofing Industries'.
- The building designer is ultimatley responsible to ensure that details used meet the requirements of the NZ Building
 Code for the specific project.
- Details of the supporting structure including cavity battens are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Underlay selection and building wrap types are the responsibility of the designer. When rigid wall underlay is
 required it is the designers responsibility to ensure the correct type is used and follow the manufacturers
 recommendation for installation.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/ASI.

 SITUATION I
 (1)
 75mm
 (3)

 SITUATION 2
 (2)
 I OOmm(3)

Detail Number: RI-RSLW001A-1

Date drawn: 07/07/2017

MINIMIJM

Scale: 1:5@ A4

NOTES:

- I. SITUATION I: IN LOW, MEDIUM OR HIGH WIND ZONES, WHERE ROOF PITCH IS 10° OR GREATER
- 2. SITUATION 2: FOR ALL ROOF PITCHES IN VERY HIGH # EXTRA HIGH WIND ZONES, FOR ALL WIND ZONES WHERE ROOF PITCH IS LESS THAN 10°.
- EXCLUDING DRIP EDGE.

SITE WIND ZONE

(As per NZ53604)

- 4. CAVITY BATTENS CONTAINING CORROSIVE
 MATERIAL MUST BE SEPARATED FROM METAL
 CLADDING BY DPC, BUILDING WRAP, PVC OR
 PAINTING
- 5. CASTELLATED BATTEN, DRAINAGE PLASTIC
 BATTEN OR APPROVED DRAINED BATTEN CAN
 BE USED WITH THIS SYSTEM

Copyright detail



2017



SLIMLINE IS OUTSIDE THE SCOPE OF E2/AS1 BUT MAYBE APPLICABLE FOR NON RESIDENTIAL BUILDINGS OR AS AN ALTERNATIVE SOLUTION