

# Texture Coating Systems

The Ultimate in Protection, Durability & Style



## COMPRESSED FIBRE CEMENT SHEET TEXTURE SYSTEM

**Dulux® AcraTex® high performance texture and coating systems for compressed fibre cement sheet.**

*Dulux AcraTex systems use premium quality products that give the aesthetic appeal, value for money and outstanding performance that you would expect from Dulux AcraTex.*

Whether it's a multi-story Commercial application or Residential dream home, *Dulux AcraTex* has the performance coating solution to deliver long term protection of any masonry substrate.

The range of exterior and interior acrylic texture coatings give long lasting protection and are available in a large selection of fashionable colours and profiles.

Supported with specialised project specification and technical service, *Dulux AcraTex* provides practical and efficient system solutions to satisfy both the aesthetic and technical demands of your project.

# Texture Coating Systems

The Ultimate in Protection, Durability & Style



## Specifications: Compressed Fibre Cement Sheet Texture System

### Substrate

#### Compressed Fibre Cement Sheet

This type of Fibre Cement Sheet (FCS) is used as an external lining fixed to timber or a metal cavity framing system, in most cases using an expressed joint between the sheets backed with a neoprene weather strip. This product is to be installed as per CFC sheets manufacturer's technical manual.

#### Substrate Preparation

Ensure that the Compressed Fibre Cement (CFC) sheet is clean, sound, dry and free of any dirt, dust, mould, fungi, grease or any other contaminants. Any screw or fixing holes should be filled with the filler that has been specified by the CFC sheet manufacturer.


### Priming

Dulux AcraTex recommends that all CFC sheeting is primed prior to any Dulux AcraTex texture or high build coatings being applied, even though some CFC sheeting may be supplied pre-primed.

### Texture And Coating

Dulux AcraTex texture and high build coatings can be chosen from the AcraTex range. These acrylic textures and high build coatings can be ordered pre-tinted to the chosen colour to give a rich and deep textured look. All Dulux AcraTex texture coatings should be overcoated with Dulux AcraTex Acrashield Advance which can be tinted to any colour from the Dulux colour range.

All texture and colour samples must be signed by the architect or owner prior to application. Dulux AcraTex recommends that all AcraTex products are applied by a qualified contractor to ensure the integrity of the system for warranty requirements.

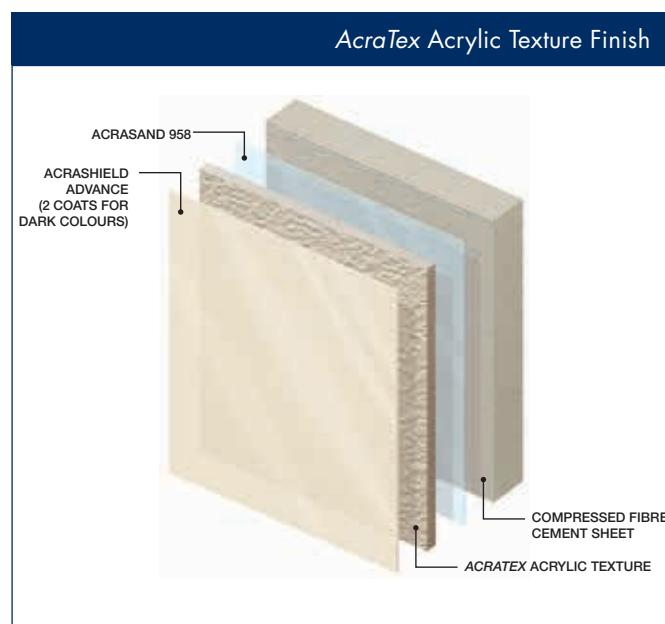

For further information go to [dulux.co.nz](http://dulux.co.nz) or call Customer Service on **0800 800 424**

Dulux® AcraTex® is a division of DuluxGroup (Australia) Pty Ltd. ABN 67 000 049 427. Dulux® and AcraTex® are registered trade marks of DuluxGroup (Australia) Pty Ltd.