22/10/2026

**Data Sheet**

# Pacific Single Glazed Timber Framed Acoustic Windows

## Description

Pacific Acoustic Windows are glazing units designed and tested for sound attenuation to a range of STC ratings. The units are all timber framed with fixed glazing, for interior use.

**For further information on this product, visit:**
https://www.pacificdoors.co.nz/products/acoustic/acoustic-windows/spa35-aw

## Product options

Single glazed units are supplied fully glazed in ready-to-install mode. Large units may require site glazing.

| Window type | Max Glazed Area | | Clear View | | Overall Frame | | Frame Type | | STC Rating |
|---|---|---|---|---|---|---|---|---|---|
| | | | Min. mm | Max. mm | Min. mm | Max. mm | Timber | Steel | |
| SPA35-AW | 4.9m2 | Height | 350 | 3000 | 478 | 3128 | √ | - | 35 |
| | | Width | 150 | 2500 | 278 | 2628 | √ | - | 35 |






Public

**Sizing Rules**
The tested clear view size for this window is 1510 mm H x 810 mm W. Acoustic performance may vary for extremely large or small units.

## Frame types & profiles

**Timber Frame**
This window is available in the below frame profile.

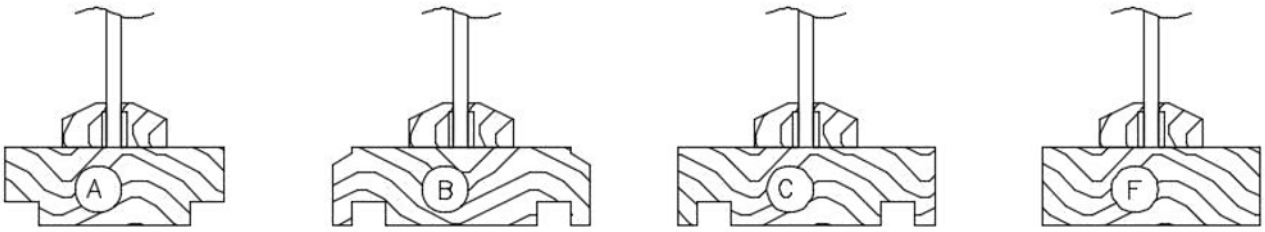


Standard jamb thicknesses are 30mm and 42mm. For more in-depth information on frame profiles and sizes, please see our Installation Instructions.

**Steel Frame**
These units are not available in a steel frame.

**Wall Types**
- Masonry or Gib® Systems.

The entire assembly, including wall, frame, and window glazing, is the tested unit.



Public