02/11/2026

Data Sheet

Pacific SPS4 Institutional Interior Door

Description

The Pacific SPS4 Institutional Interior Door is a robust, economical utility door. The SPS4 door leaf is solid core, faced in steel sheet, and capped two edges with steel channel. The door is typically hung in a steel frame.

Product features:

- Single or pair
- 4 leaf facing options
- 6 frame options
- Compatible with timber stud and masonry wall
- Suitable for interior use only
- Optional security glazing
- Optional ventilation grilles

Typical applications:

- Protection of staff or property
- Commercial environments

For further information on this product, visit:

https://www.pacificdoors.co.nz/products/security/custodial-doors/sps4

Product options

Leaf size and wall type

Leaf size

The door set is suitable for interior use only.

The thickness of the SPS4 door leaf is 50mm with an approximate leaf weight of 45kg/m2.

Wall Type	Fire Resistance Rating (FFR)	Door Application	Max Leaf Height (mm)	Max Leaf Width (mm)
Timber Stud Masonry	N/A	Single	2400	1200
		Pair	2400	1200

Public


Notes:

1. Please note that the maximum leaf width shown above is measured per door leaf.
2. Doors can be manufactured to any practical size, please contact Pacific Doors.


Door Leaf Options

Leaf Facings
0.9mm electrogalvanised steel sheet is standard.

Leaf Edges
1.2mm steel edge cappings over the facing to two long edges.




Meeting Stiles
The meeting stiles listed below are applicable to paired door sets only.

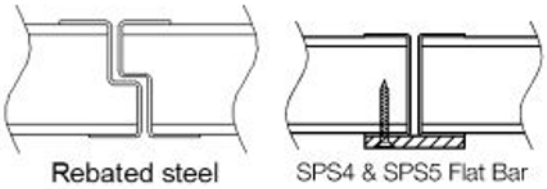

Frame Types and Profiles

Timber Frame
This door set is only available in a steel frame.

Steel Frame
The steel frame profiles listed below are available for the SPS3 door set.

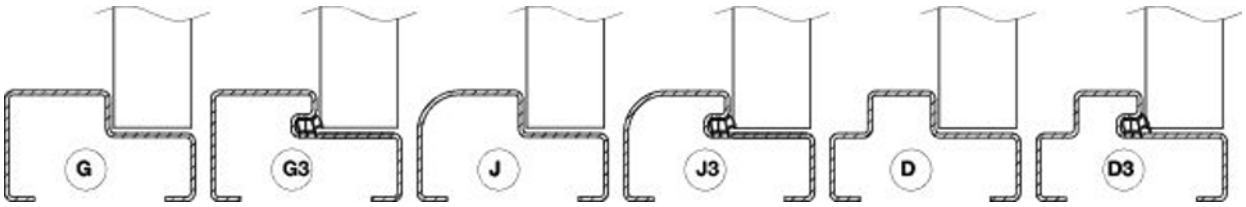


Standard frames are three-sided only, with no sill. Four-sided frames and/or custom sills may be available on request. For more in-depth information on frame profiles and sizes, please see our Installation Instructions.


Public

Vision Panel

Glazing Type	Max. Glazed Area		Max. height (mm)	Max width (mm)	Glazing Bead
	Per VP	Total			Steel Bead
Security Glazing	0.8325m2	1.665m2	925	900	√

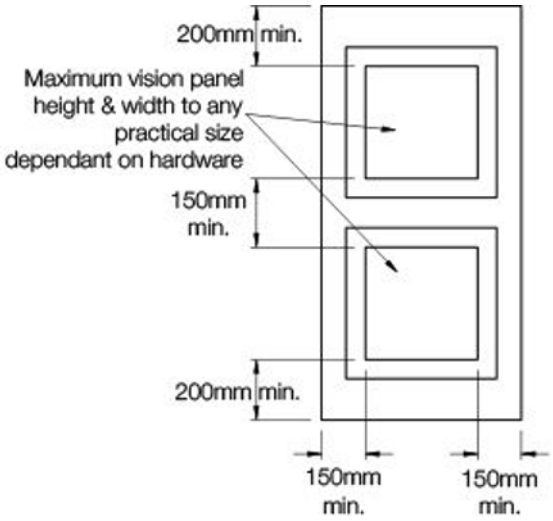

Standard Vision Panel Cross Sections

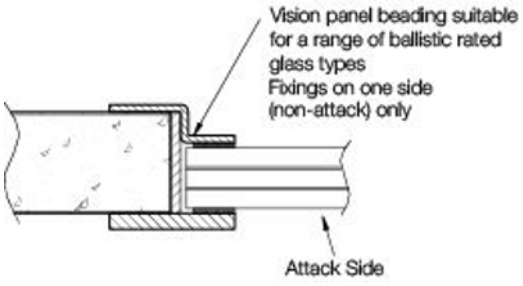

Public