02/11/2026

Data Sheet

Pacific SPS5 Institutional Exterior Door

Description

The Pacific SPS5 Institutional Exterior Door is a robust, economical utility door suitable for sheltered exterior use. The SPS5 door leaf is solid core, faced in steel sheet and capped 4 edges with steel channel. The door is hung in a steel frame.

Product features:

- Single or pair
- 4 leaf facing options
- 6 frame options
- Compatible with timber stud and masonry wall
- Suitable for both interior and Exterior
- Optional security glazing
- Optional ventilation grilles

Typical applications:

- External Security Door
- External Factory Door

For further information on this product, visit:
https://www.pacificdoors.co.nz/products/security/custodial-doors/sps5

Product options

Leaf size and wall type

Leaf size
The door set is suitable for sheltered exterior use only.

The thickness of the SPS5 door leaf is 50mm with an approximate leaf weight of 45kg/m2.

Public

Wall Type	Fire Resistance Rating (FFR)	Door Application	Max Leaf Height (mm)	Max Leaf Width (mm)
Timber Stud Masonry	N/A	Single	2400	1200
		Pair	2400	1200


Notes:

1. Please note that the maximum leaf width shown above is measured per door leaf.
2. Doors can be manufactured to any practical size, please contact Pacific Doors.


Door Leaf Options

Leaf Facings
0.9mm galvanized steel sheet is standard.

Leaf Edges
1.2mm steel edge cappings over the facing to two long edges and top. Bottom edge is undercapped.




Meeting Stiles
The meeting stiles listed below are applicable to paired door sets only.

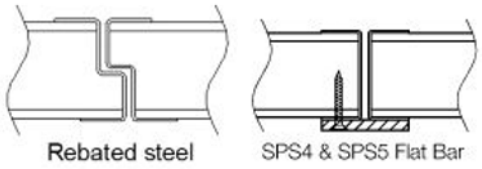

Frame Types and Profiles

Timber Frame
This door set is only available in a steel frame.

Steel Frame
The steel frame profiles listed below are available for the SPS5 door set.

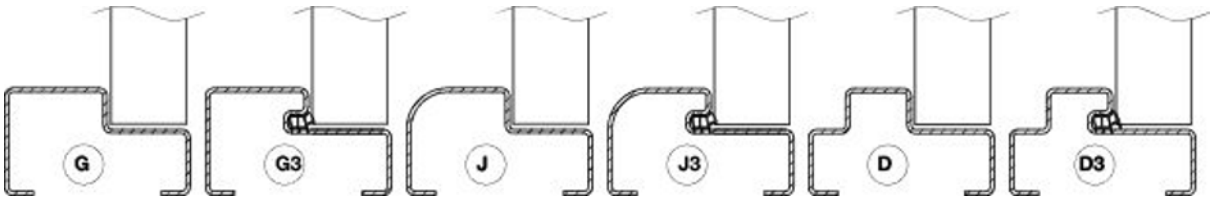


Public


Standard frames are three-sided only, with no sill. Four-sided frames and/or custom sills may be available on request. For more in-depth information on frame profiles and sizes, please see our Installation Instructions.

Vision Panel

Glazing Type	Max. Glazed Area		Max. height (mm)	Max width (mm)	Glazing Bead
	Per VP	Total			Steel Bead
Security Glazing	0.8325m2	1.665m2	925	900	√

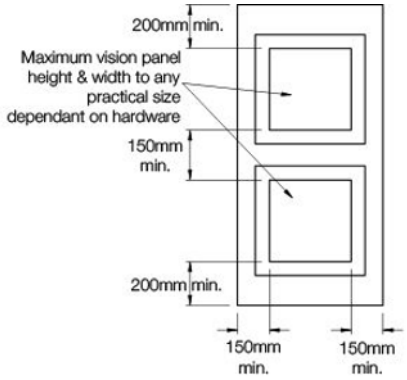

Standard Vision Panel Cross Sections

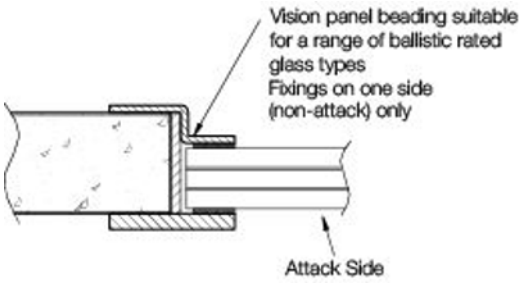

Public