Performance Plus 7GUb11-1 Underfloor Heating

Want warm feet even when you go barefoot? The Performance Plus Underfloor Heat Pump System maintains a constant floor surface temperature of 22-26° C by way of natural radiation and convection.

With traditional forms of heating, temperature variations and draughts can occur. With a Performance Plus Underfloor Heat Pump System this does not happen as the pipe work distributes heat to the entire floor area, so there are no hot or cold spots. Separate controls for each zone means you can tailor the water flow for each area to suit individual room or zone requirements night & day. 'Ub' series Performance Plus Heat pump water heaters have been developed specifically for use in residential and commercial hydronic floor heating systems.

100% New Zealand owned and operated, Hot Water Heat Pumps Ltd Performance Plus range is the largest in Australasia, manufacturing over 28 standard models for underfloor heating alone, plus custom models on request. This means whether you require 5kWs or 95kWs or larger; Hot Water Heat Pumps Ltd has a solution to meet your requirements. Custom models such as the DuoHeat range can also heat other applications like domestic hot water, adding further value and reducing running costs in another high usage area.

UNDERFLOOR HEAT PUMP FEATURES

- Quiet running
- Constant natural warmth from head to toe
- No dusty air particles or toxic gas fumes
- High efficiency hermetically sealed compressor
- Ozone friendly refrigerants
- Epoxy coated corrosion resistant coil fins
- Thermostatically controlled temperatures
- Designed for optimal performance even in freezing conditions
- Built for life

Experience the best in heat pump water heater technology

OPTIONAL EQUIPMENT

• Ducts and grills for plant room installs

P

- Wall mounting bracket
- Rubber anti-vibration pads

IDEAL APPLICATIONS

Underfloor Heating





Performance Plus 7GUb11-1 Technical Specifications

Heating - kW output *1	11
kW input	3.4
Power Supply	Single Phase
Required D - curve circuit breaker amps	32 amps
Nominal compressor run amps	15.1
Fan full load amps	0.9
Minimum flow rate - litre/second	0.33
Recommended flow rate - litre/second	0.65
Water connections	25mm BSP
Dimensions LxWxH - mm	1030 x 380 x 1170
Weight - kg	125
Air volume @ high speed litre/second	1,100
Sound pressure level, high dB(A) \ast_2	51/52
Buffer tank onboard *3	Yes
Circulation Pump	Yes


NB: Designs and specifications are subject to change without notice

*1 kW output values are nominal ratings based on 8°C wet bulb and 38°C water temperature. *2 Sound pressure measured at 3m in decibels re 20 µPa.

*3 Not suitable for pressurized systems.



INSTALLATION INSTRUCTIONS

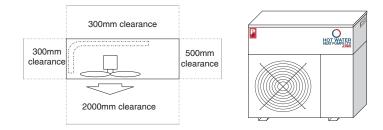

3 Corban Avenue, Henderson, Auckland 0612 PO Box 21 586, Henderson, Auckland 0650 Phone 09 838 9444 Fax 09 838 6223 info@waterheating.co.nz

Why buy from Hot Water Heat Pumps Ltd

Back up and service: You can be assured of unprecedented after-sales service. We provide free telephone and email support on all products, for the life of the product, even if you're outside of the warranty period. With periodic maintenance, your Hot Water Heat Pumps Ltd's product will provide you with a lifetime of efficient hot water heating.

Warranty: All of our residential heat pump underfloor heater models carry a comprehensive two year parts and labour warranty, including the compressor, evaporator coil, heat exchanger and refrigeration systems.



Safety first: Our heat pump water heaters are fitted with protection systems to prevent damage in the event of a malfunction. Such as a flow switch to ensure the heat pump cannot operate without water flow and other refrigeration safeties. If a problem is identified, the unit automatically shuts down before damage can occur.

Energy efficient: Government agency EECA (Energy Efficiency Conservation Authority) has listed heat pumps as one of the most energy efficient forms of heating in New Zealand.

Clean and green: As heat pumps use renewable energy (air), they are safer and cleaner to run than fossil fuel burners and can lower CO_2 emissions by up to 70% (compared to gas and diesel burners).

