

AP 100



Anchor Systems

All Sayfa anchor points are manufactured, batch tested and numbered to provide full traceability from manufacture through to installation.

The Sayfa range of proprietary anchor points are designed, engineered and tested to perform in multiple and diverse applications, utilising years of 'know how' and cutting edge technology. Many of the fall arrest anchors incorporate unique patented energy absorbing technology that drastically reduces the impact to the user and prevents damage to the structure in the event of a fall. Sayfa anchors undergo a series of rigorous tests which include static and dynamic load tests.

Compliance

Sayfa's range of anchor points complies with Australia Standard AS/NZS/ 1891.4.2009, AS/NZS/ 5532.2013 & AS/NZS 4488.

Applications

- Roof maintenance
- Gutter cleaning
- Rope access systems for facade access and maintenance

Product Range

3SIXTY / XPLORA / SPYDA / COBRA / LOW-PRO



AP 100

ANCHOR POINT SYSTEMS

AP 115

SAY/FA®

AP 115.1000

- Anchor Strop incl
Quicklink Connector
- 15kN fall arrest rated
 - PVC coated stainless steel cable
 - PVC coated end terminations
 - 1000mm
 - 0.4kg

RRP (ex GST) \$82.00

AP 115.1500

- 1500mm
- 0.4kg

RRP (ex GST) \$91.00

AP 115.2000

- 2000mm
- 0.5kg

RRP (ex GST) \$99.00

AP 115.2500

- 2500mm
- 0.6kg


RRP (ex GST) \$106.00

AP 115.3000

- 3000mm
- 0.7kg

RRP (ex GST) \$116.00



 Custom lengths available at additional 15% of RRP, lead times apply.

AP 118

X-PLORA®

AP 118

- Concrete Mount
Anchor, Raised
- 15kN fall arrest rated
 - M16, 100mm Exposed Thread, 45° Cut

AP 118.050

- 50mm extension
- 0.6kg

RRP (ex GST) \$101.00

AP 118.150

- 150mm extension
- 0.7kg


RRP (ex GST) \$125.00


AP 118.200

- 200mm extension
- 0.9kg

RRP (ex GST) \$138.00



 Must be load tested as per AS/NZS Standards.

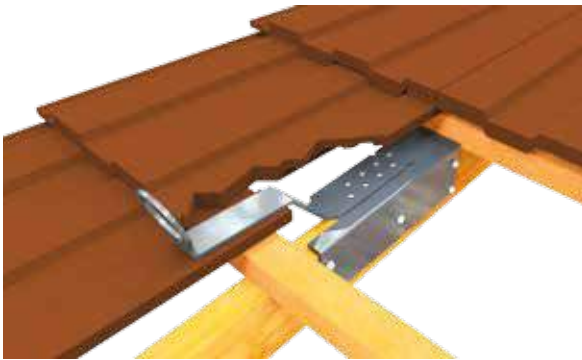
 AP118.200 not suitable for twin rope access use.



AP 121

COBRA
AP 121
 Timber Mount
 Anchor Kit - 15kN

- 15kN rated
- 0.7kg

 RRP (ex GST)
 \$160.00


i Structure must be certified to comply to AS5532 : 2013.

! Not suitable for twin rope access use.

AP 122

SAYFA
AP 122D
 Timber Mount Anchor
 Kit with Dektite Flashing

- 15kN rated
- 1.6kg

 RRP (ex GST)
 \$165.00
AP 122T
 Timber Mount Anchor
 Kit with Tiletite Flashing

- 15kN rated
- 1.7kg

 RRP (ex GST)
 \$204.00


i Structure must be certified to comply to AS5532 : 2013.

! Not suitable for twin rope access use.

! Structures less than 120 x 45mm requires laminating timber.

AP 123

low-pro
AP 123F
 Steel Purlin Mount Anchor,
 Flat - 15 kN

- Flat flange
- 15kN rated
- 0.7kg

RRP (ex GST) \$94.00

**AP 123C**
 Steel Purlin Mount Anchor,
 Corrugated - 15 kN

- Corrugated flange
- 15kN rated
- 0.7kg

RRP (ex GST) \$94.00

**AP 123S**
 Steel Purlin Mount Anchor,
 Square Corrugated - 15 kN

- Square corrugated flange
- 15kN rated
- 0.7kg

RRP (ex GST) \$94.00



i Suitable for fall arrest / twin rope access use

AP 124

X-PLORA
AP 124
 Through Bolt Anchor,
 M16 x 300mm - 15kN

- M16 x 300mm
- 15kN rated
- 0.7kg

 RRP (ex GST)
 \$122.00


i Suitable for fall arrest / twin rope access use.



AP 100

ANCHOR POINT SYSTEMS

AP 125A



AP 125A

Concrete Mount
Anchor

- Chemical fix
M16 x100mm
- 15kN rated
- 0.3kg


RRP (ex GST)
\$57.00



Suitable for fall arrest / twin rope access use.



Must be load tested as per AS/NZS Standards.



AP 127



AP 127.10

Concrete Mount
Anchor Kit - M16

- Removable eyelet
- Chemical fix insert
- 15kN rated
- 0.5kg

RRP (ex GST) \$85.00



AP127.20 cap not included with kit.

AP 127.20

Stainless Threaded Cap

- 0.1kg

RRP (ex GST) \$19.00



AP 127.30

Concrete Mount Insert
& Data Label only - M16

- 0.2kg

RRP (ex GST) \$67.00



AP 127.40

Stubby Eyebolt
Assembly - M16

- Includes washer &
spring washer
- 0.3kg

RRP (ex GST) \$25.00



Suitable for fall arrest / twin rope access use.



Must be load tested as per AS/NZS Standards.

AP 125S



AP 125S

Concrete Mount Swivel
Anchor

- Chemical fix
M16 x100mm
- 15kN rated
- 0.5kg

RRP (ex GST)
\$95.00



Suitable for fall arrest / twin rope access use.



Must be load tested as per AS/NZS Standards.



AP 126



AP 126

Concrete Mount
Anchor with
Torque Indicator

- 15kN rated
- 0.6kg

RRP (ex GST)
\$111.00



Suitable for fall arrest / twin rope access use.



Must be load tested as per AS/NZS Standards.



PRODUCTION

"TUESDAY MORNING, CRANE LIFT 6AM, PITT STREET, SYDNEY, WE WILL DO IT. GIVE US YOUR SPECIAL REQUESTS, AHEAD OF TIME TO MAKE SURE WE COORDINATE WITH THE ENTIRE TEAM SO THAT WE DELIVER ON TIME, EVERY TIME."



AP 129A

**AP 129A**

Concrete Cast-In Anchor

- Includes plastic nailing plate, reo bar & data label
- 15kN rated
- M16 x 35mm s/steel eyebolt
- Stainless cast-in ferrule
- 0.79kg

RRP (ex GST)
\$108.00


Suitable for fall arrest / twin rope access use.

AP127.20 Stainless cap sold separately.

AP 129V

**AP 129V**

Concrete Cast-In Anchor with Threaded Rod (Adjustable)

- Includes mounting plate, 300mm threaded rod - M12, reo bar, plastic cap & data label
- 15kN rated
- M16 x 35mm s/steel eyebolt
- Stainless cast-in ferrule
- 1.0kg

RRP (ex GST)
\$119.00


Suitable for fall arrest / twin rope access use.

AP127.20 stainless cap sold separately.

AP 130A

**AP 130A**

Top Mount Anchor, Universal

- Universal plate
- 15kN rated
- Includes fixings
- 1.4kg

RRP (ex GST)
\$162.00



Not suitable for twin rope access use.

AP 130T

**AP 130T**

Top Mount Anchor, Top Hat

- Top hat plate
- 15kN rated
- Includes fixings
- 2.0kg

RRP (ex GST)
\$162.00


Not suitable for twin rope access use.

AP 130W

**AP 130W**

Top Mount Anchor, Wide Deck

- Suits 300 - 372mm deck
- 15kN rated
- Includes fixings

RRP (ex GST)
\$195.00


Suits Kingspan® KS1000 & Dimond® DP955 and similar roof decks.

Not suitable for twin rope access use.



AP 100

ANCHOR POINT SYSTEMS

AP 141A



AP 141A

Top Mount Swivel Rope Access Anchor

- 15kN rated
- Includes fixings
- 3.2kg

RRP (ex GST)
\$230.00



Suitable for fall arrest / twin rope access use.

AP 145S



AP 145S

Temporary Anchor, Screw Fix Only

- Screw fix only
- 15kN rated
- Includes carry bag
- 5.8kg

RRP (ex GST)
\$390.00



Not suitable for twin rope access use.

AP 141W



AP 141W

Top Mount Swivel Rope Access Anchor, Wide Deck

- 15kN rated
- Suits 300 - 372mm deck
- Includes fixings

RRP (ex GST)
\$280.00



Suits Kingspan® KS1000 & Dimond® DP955 and similar roof decks.

Suitable for fall arrest / twin rope access use.

AP 145C



AP 145C

Temporary Anchor, Clamp & Screw Fix

- Clamp fix & screw fix
- 15kN rated
- Includes carry bag
- 10.0kg

RRP (ex GST)
\$620.00



Not suitable for twin rope access use.

AP 176



AP 176

Anchor Point Installation/Inspection Tag

- Barcoded ID number
- Includes pen

RRP (ex GST)
Per pack of 100pcs
\$375.00



AP 146



AP 146

Clamp Set Only (4 Clamp Sets) for AP145S

- 4 clamps
- Includes storage bags
- 4.3kg

RRP (ex GST)
\$245.00



SD 956.10

SAYFA[®]
SD 956.10

Fixing Kit for AP100 & SL200 Components

- 3.5kg

RRP (ex GST)
\$198.00

WHEN USING A WEBBING TEMPORARY STATIC LINE BETWEEN (2) SPYDA TEMPORARY ANCHORS, THE DISTANCE BETWEEN THE ANCHORS MUST NOT EXCEED 10 METRES AND THE SPYDA ANCHOR MUST BE SCREW FIXED TO THE ROOF STRUCTURE. THE CLAMP FIX OPTION IS NOT SUITABLE FOR USE WITH A TEMPORARY STATIC LINE SYSTEM.


3 SIXTY[®] ANCHOR, FALL ARREST RATED AT 15kN.

**360° ROTATIONAL EYELET**

- Ensures no snaphook roll-out
- Large eye for easy attachment

**PROFILED DOME**

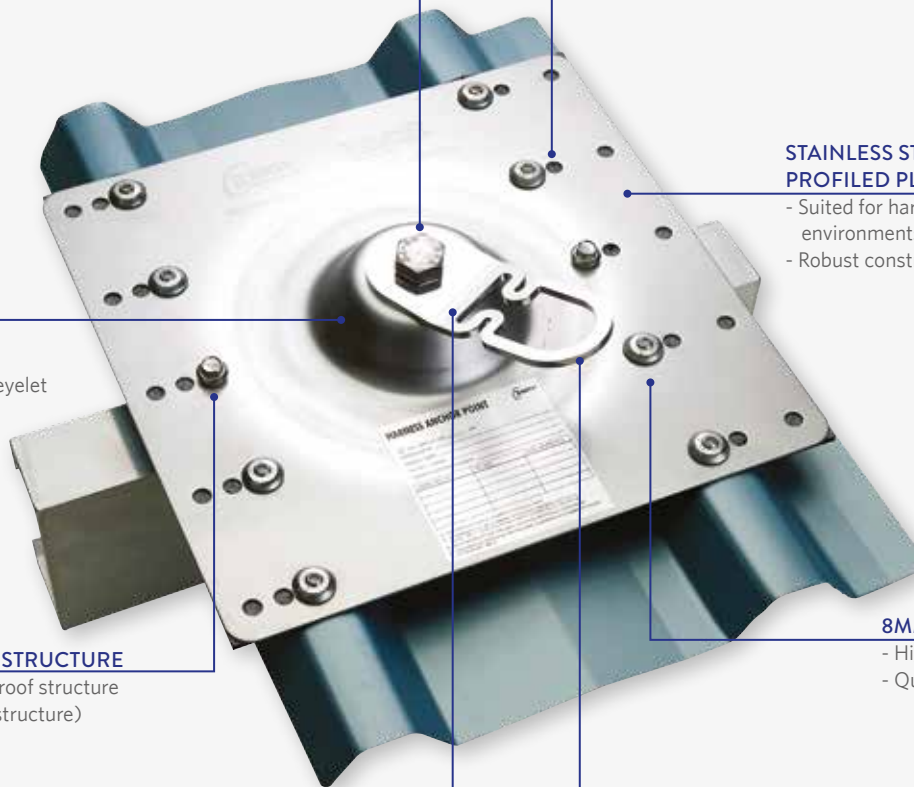
- Ensures no interference with roof deck rib
- Allows free rotation of eyelet

**14G TEK SCREW INTO STRUCTURE**

- Positive attachment to roof structure (steel purlin or timber structure)

**BATCH IDENTITY NUMBER**

- Allows traceability and identification

**MULTIPLE FIXING LOCATIONS**

- Suits varying roof deck pitch
- Suits screw and rivet fixing

**STAINLESS STEEL PROFILED PLATE**

- Suited for harsh environments
- Robust construction

**8MM BULB TYPE RIVET**

- High pullout resistance
- Quality penetrations seal

**ENERGY ABSORBING EYELET**

- Reduces load on operator and roof structure in a fall situation
- Allows attachment to light grade structure

Testimonial

“Efficient process, from ordering to receiving product, including accurate notifications.”

