
MULTIRIB VERTICAL CLADDING (Recessed Window / Door) COMMERCIAL WINDOW / DOOR SILL FLASHING FOR



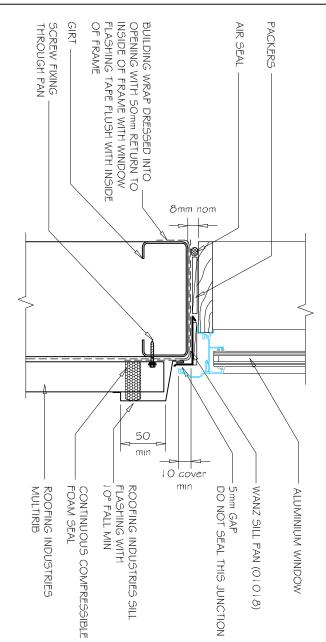


NOTES:

- These details are generally in compliance with the NZ Metal Roof & Wall Cladding Code of Practice and in some cases specific details by 'Roofing Industries'.
- The building designer is ultimately responsible to ensure that details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure are indicative only and are the responsibility of the building designer.
- Thermal break or cavity battens may be required in some circumstances.

 Underlay selection and building wrap types are the responsibility of the designer,
- Alternative support to galvanised netting should be used in severe coastal environments including when aluminum is used.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.

 Further information can be obtained from the NZ Metal Roof & Wall Cladding (
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Fractice www.metulroofer.org.nz & www.roof.co.nz
- Where necessary adjust drawings for purlin battens or cavity battens
- Details are for steel based materials, other substrate may require some changes



Sill flashings stop ended to receive jamb flashings (Dimensions are indicative only \$ show minimum lap covers)

DETAIL NO.

CMRW012C

DATE DRAWN

16/08/12

FILE REFERENCE RI-CMRWO12C.DWG

GENERAL NOTES.

- (1) REFER TO E2/A51 OR WANZ WIS FOR GENERAL WINDOW OPENING FOR WRAPPING
- OF FRAMED OPENING PRIOR TO WINDOW INSTALLATION.
 (2) WINDOW PROFILE TO BE SELECTED TO ACHIEVE COVER SHOWN IN DETAILS.
- (3) ARCHITRAVE'S ARE SHOWN FOR CONSISTENCY ONLY,
 DETAIL MAY BE USED WITH REBATED LINER.
- (4) WHERE SUPPORT BRACKETS ARE REQUIRED BY THE WINDOW MANUFACTURER TO CARRY THE FRAME AND GLAZING LOADS THEY MUST BE SUPPLIED AS AN INTEGRAL PART OF THE WINDOW MANUFACTURER'S RECOMMENDATIONS.
- (5) LIASE WITH WINDOW MANUFACTURER PRIOR TO INSTALLATION.

REFERENCE FLASHINGS:
NZ METAL ROOF AND WALL CLADDING
CODE OF PRACTICE NZMRM.
WANZ WIS.
DIMENSIONS ARE INDICTITIVE ONLY

©COPYRIGHT DETAIL 2012

