



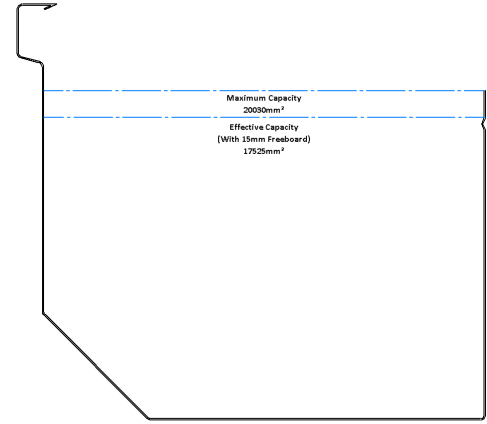

TEXAN 175mm BEVEL SPOUTING

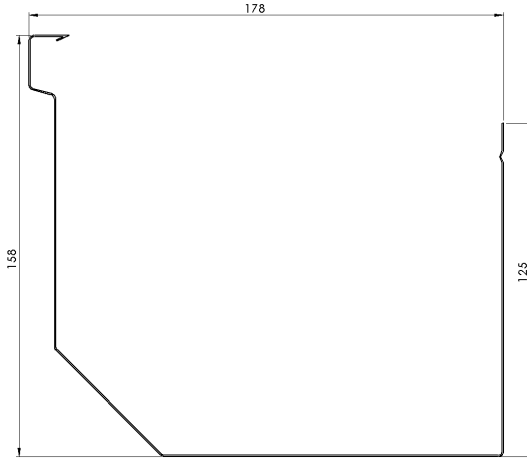

| PRODUCT SPECIFICATIONS | | CAPACITY SPECIFICATIONS | |
|--|--|--|---|
| MagnaFlow™ Pre-painted Steel | 0.55mm G300 with a minimum of 240gsm alloy/zinc coating. | Maximum cross sectional area | 20,030mm ² |
| AlumiGard™ Pre-painted Aluminium | 0.70mm Grade 5005 H34 | Effective cross sectional area with 15mm freeboard | 17,525mm ² |
| EuraMax Pre-painted Aluminium | 0.80mm Grade 5754 H42 | Flow Capacity | 322 Litres/min |
| Pure Copper Copper 3/4 Hard | 0.60mm Grade C12200 | Minimum recommended fall | 1:500 = 2mm per 1 metre |
| External Bracket | 3.00mm Aluminium 5052 H34 2.50mm Copper or Brass-hard | Recommended minimum downpipe cross section | 4,776mm ² |
| Recommended Maximum bracket spacing | 750mm 600mm where snow fall is possible | Recommended round standard downpipe sizes | 100mm Ø = 7,539mm ² 80mm Ø = 4,776mm ² |
| Recommended Fixings | Minimum Class 4 screw &/or rivet fasteners compatible with substrate and bracket material. | Recommended rectangle standard downpipe sizes | 4x2" = 5,346mm ² |

| | |
|------------------------|--|
| Scope of use | Continuous Group rainwater systems are intended to collect and channel water that runs off a roof. It is intended that the metal spouting be placed at the perimeter of the building (Positioned outside the building envelope). |
| NZBC Compliance | Test information available from Pacific Coilcoaters, New Zealand Steel and Ambro Metals, combined with past history of rainwater products indicate, that provided the product use and maintenance is in line with the guidelines contained in the current literature, Continuous Group rainwater systems can be expected to meet the performance criteria in clause E2 of the New Zealand building code. |
| Durability | All copper and aluminium products listed above are fit for purpose in environment zone B, C, D and E* Pre-painted steel products are fit for purpose in environment Zone B and C* They may be used in environment zone D subject to a pre-approval warranty application based on site address* *In all cases, areas with high wind &/or salt &/or thermal/industrial atmospheric conditions may require specific engineering design (S.E.D) Reference: Section 4, "Durability" from NZS3604:2011. |
| Maintenance | Continuous Group rainwater systems require regular maintenance to ensure the useful life of the products. Minimum maintenance interval of every 6 months or as often as needed to avoid build up of contaminants (dirt, salt, pollen etc.) on the spouting surface. Simply spray and rinse with water and/or if necessary scrub with a soft nylon brush. More information and specific maintenance products are available on our website www.continuous.co.nz/care-and-maintenance |
| Warranty | MagnaFlow™ : Environment zone B & C—10 year paint warranty ; 12 year perforation warranty. MagnaFlow™ : Environment zone D—10 year paint warranty ; 10 year perforation warranty. AlumiGard™ : 10 year paint warranty ; 12 year perforation warranty. Pure Copper & EuraMax : 20 year material and perforation warranty. Full details and conditions of our comprehensive warranty can be found at www.continuous.co.nz/warranties |