140 N-LINE 140mm Truss Fascia

CONTINUOUS GROUP Made first. Made to last.

CONCRETE TILE ROOF

CONSTRUCTION DETAIL & COMMON DROP HEIGHTS

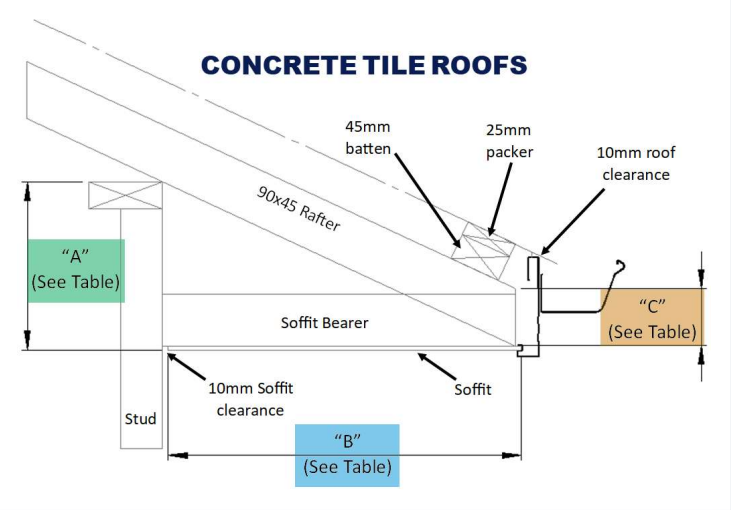

GABLE END DETAIL

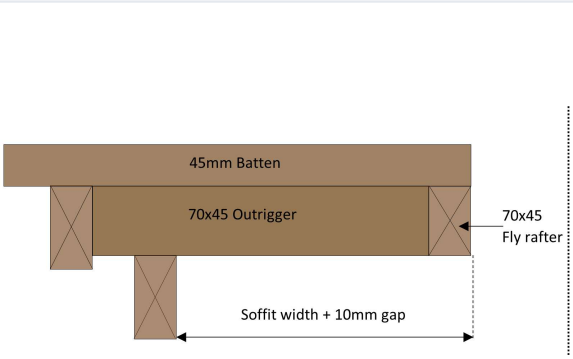

ROOF PITCH (degrees)	A DROP HEIGHTS (MM) — DIMENSION "A" — B SOFFIT WIDTH (MM) — DIMENSION "B" 300	450	600	750	900	C TOE CUT (MM) Dimension "C"
15.0	55	95	135	175	216	65
17.5	69	116	163	211	258	65
20.0	83	137	192	247	301	65
22.5	97	159	221	283	345	65
25.0	111	181	251	321	391	65
27.5	126	204	282	360	438	65
30.0	140	227	314	400	487	65
35.0*	171*	276*	381*	486*	591*	64*
40.0*	205*	331*	456*	582*	708*	62*
45.0*	242*	392*	542*	692*	842*	59*

"A" Drop height — the shaded columns **"B"** Soffit width — the blue headings **"C"** Toe cut — the gold column

DROP HEIGHT "A" ASSUMES

- Soffit clearance 10mm
- Rafter height 90mm
- Roof clearance 10mm
- Batten 45mm + 25mm packer on last batten = 70mm

* Roof pitch over 30 degrees may require a horizontal fascia return and boxed soffit at gable corners.

For other pitches and soffit widths, use the **140 N-Line Online Drop Height Calculator**.

All information, images and drawings are correct at time of publication August 2026