

Titen Turbo™

You've got to drive it
to believe it!



Titen Turbo
Flat Head Screw



Titen Turbo
Hex-Head Screw

Titen Turbo™ Concrete and Masonry Screw

Easy, Fast and Reliable.

Smooth driving with less torque while providing superior holding power.

Titen Turbo delivers what pros want — consistently trouble-free installation, and fastening strength they can depend on.

SIMPSON

Strong-Tie

®

Titen Turbo™

Concrete and Masonry Screw



Material: Carbon steel


Finish: Zinc plated with baked ceramic coating

Features and Benefits

- Patent-pending Torque Reduction Channel that traps dust where it can't obstruct the thread action, reducing the likelihood of binding in the hole
- Serrated screw point for easier starts when fastening wood
- Availability with either a hex head or, for a smoother installed profile, a 6-lobe-drive countersunk head
- 6-lobe bit included in packaging for flat head version
- Designed for installation with a cordless drill or impact driver
- Use in dry interior environments only

Anatomy of the Titen Turbo™ (TNT) Concrete and Masonry Screw Anchor

Next Generation TNT screw anchor designed to improve installation experience with lower torque and higher loads.

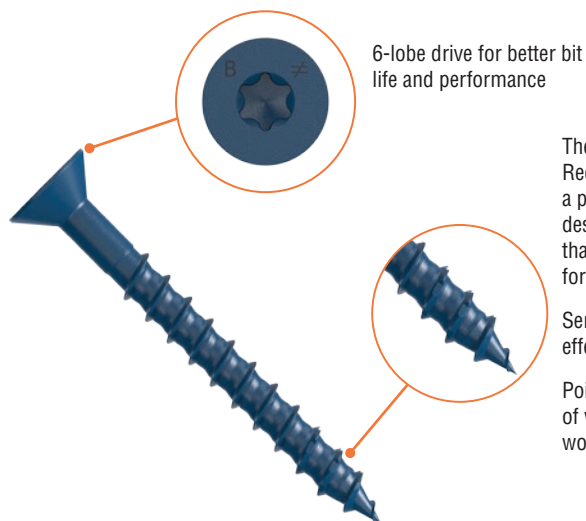

6-lobe drive for better bit life and performance

The revolutionary Torque Reduction Channel features a patented reverse thread design with dust channel that allows more space for dust

Serration on leading edge to effectively cut the concrete

Pointed tip for easy attachment of wood to concrete or for wood-to-wood applications

Specifications

Model No.	Size (mm)	Head Style	Point	Drill Bit Dia.	Quantity				
					Pack	Carton			
TNT25114H	6.5 x 32	3/16" Hex	Serrated Screw Point	3/16"	100	1,600			
TNT25134H	6.5 x 45					500			
TNT25214H	6.5 x 57					500			
TNT25234H	6.5 x 70					500			
TNT25314H	6.5 x 83					400			
TNT25334H	6.5 x 95					400			
TNT25400H	6.5 x 102	T30 6-Lobe Flat	Serrated Screw Point	3/16"	100	400			
TNT25134TF	6.5 x 45					500			
TNT25214TF	6.5 x 57					500			
TNT25234TF	6.5 x 70					500			
TNT25314TF	6.5 x 83					400			
TNT25334TF	6.5 x 95					400			
TNT25400TF	6.5 x 102					400			
MDB18512C1	3/16" x 140					Percussion Drill Bits to suit above screw anchors		1	10



Electrical Boxes



Pipe / Cable Clips



Window Frames / Thresholds



Basement Furring / Framing to Concrete



Shelf mounting to concrete/CMU



Handrails

Simpson Strong-Tie® (New Zealand) Ltd
 Call **09 477 4440**
strongtie.co.nz

© 2020 Simpson Strong-Tie Company Inc.

This flyer reflects information available as of May 20, 2020 and may be updated periodically. Please visit our website for current information and limited warranty.

F-A-TNTNZ20