
Cavity Sliders™

BarnDoorTrack

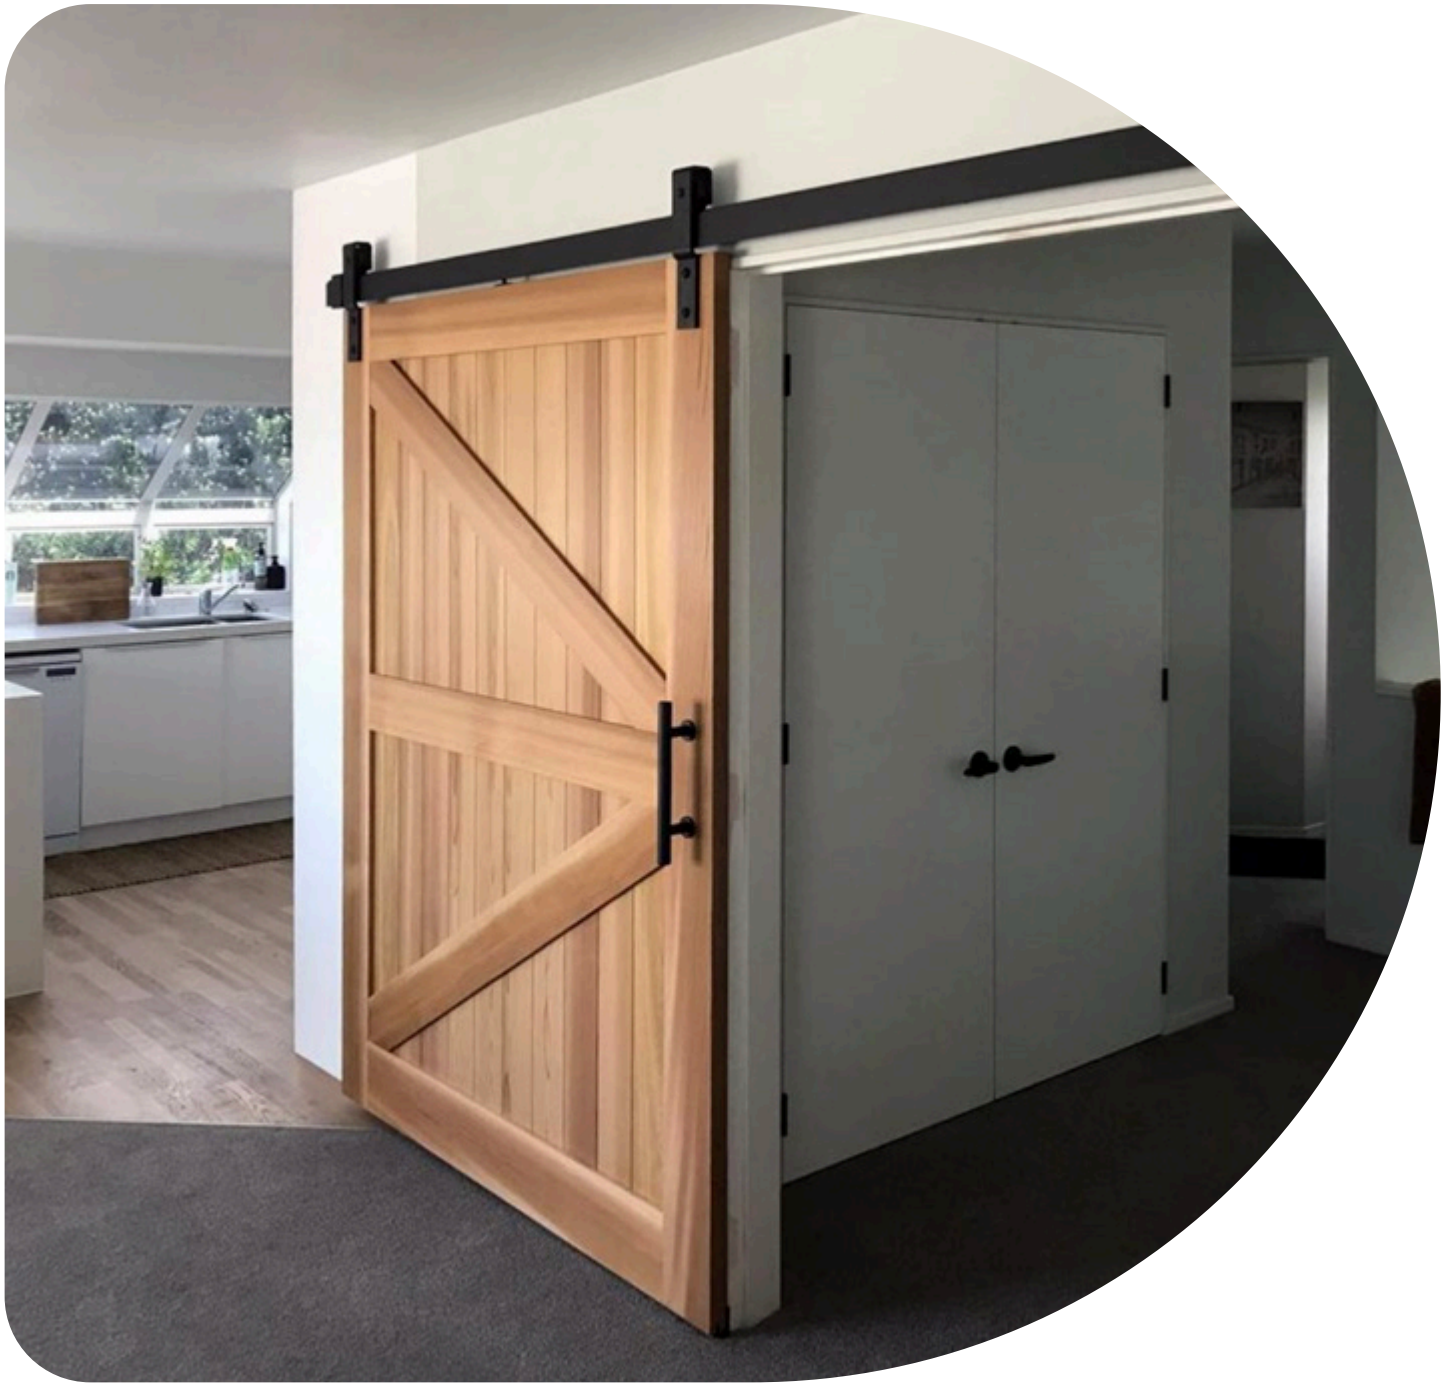

BarnDoorTrack

The CS BarnDoorTrack is suitable for surface sliding applications where there is enough strength in the wall to side mount a track above an opening.


It is designed to offer adjustability of the door out from the wall. This allows for clearance with architraves and skirtings without an unsightly head spacer.

Installation is quick and easy as the track bracket is supplied with pre-machined fixing slots. The track is pre-finished black anodised.

Features

- Track is high-quality, heavy duty extruded aluminium
- No exposed fasteners gives a clean look
- Ultra smooth running acetal wheels
- Anti-jump system ensures wheels cannot jump off the track
- Stainless steel hanger pack available on request

Product Specifications

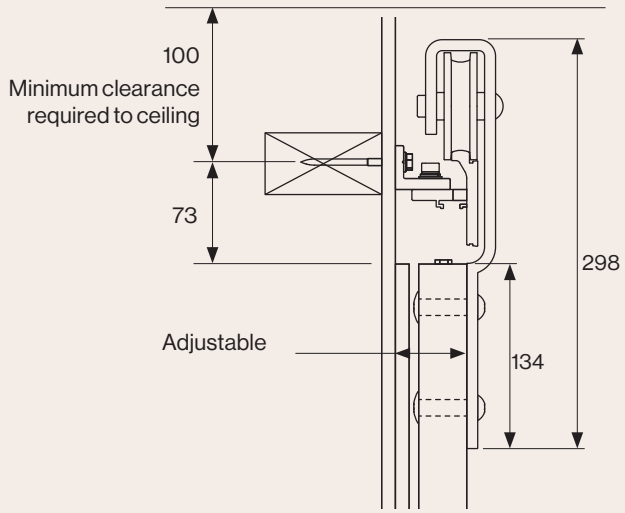

Technical Information

Minimum Door Thickness	32mm
Maximum Door Thickness	See below
Track Finish	Black anodised
Maximum Weight (per track)	300kg
Maximum Weight (per door)	180kg*
Maximum Door Weight (SofStop)	100kg


*Doors over 180kg require extra hangers or a customised solution

How to Specify

1. Specify track length
   Available in 6, 7, 8, 9, 10, 12, 13, 14, 15, 16, 17, 18 and 19' pre-cut lengths (1.8m - 5.8m)
   Track kit includes: 2x Hanger Brackets, 2x Track Stops, 1x Floor Guide
2. Determine overall thickness (door + gap + architraves) and choose a bracket
   a. Narrow option: 40 - 61mm
   b. Wide option: 62 - 80mm
3. Choose additional Hanger Packs (if required)
4. Select SofStop Pack(s) (if required)

Installation Notes

The stud wall must be level and solid enough to support the door weight. This track is supplied with coach screws suitable for use with timber framing. For fixing to concrete walls, masonry anchors must be used.

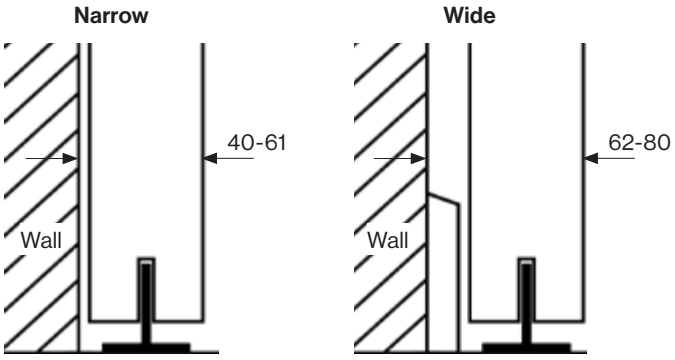

Configurations



Single



Bi-Parting

Operation



Standard



SofStop®

© All copyright and other property in this document is reserved by Cavity Sliders Ltd.
Details and specifications are subject to change without notice. Whilst all care is taken to ensure the accuracy of all information, no responsibility will be accepted for any errors or omissions.
Drawings are not to scale. Dimensions are in mm. **CS BARNDOORTRACK** (O.D. 2017) 03/2025

CavitySliders.com

info@cavitysliders.co.nz 0800 754 337

BRANZ Appraised
Appraisal No.900 [2020]

NEW ZEALAND MADE

masterspec partner